


ONDATECH

TECNICO

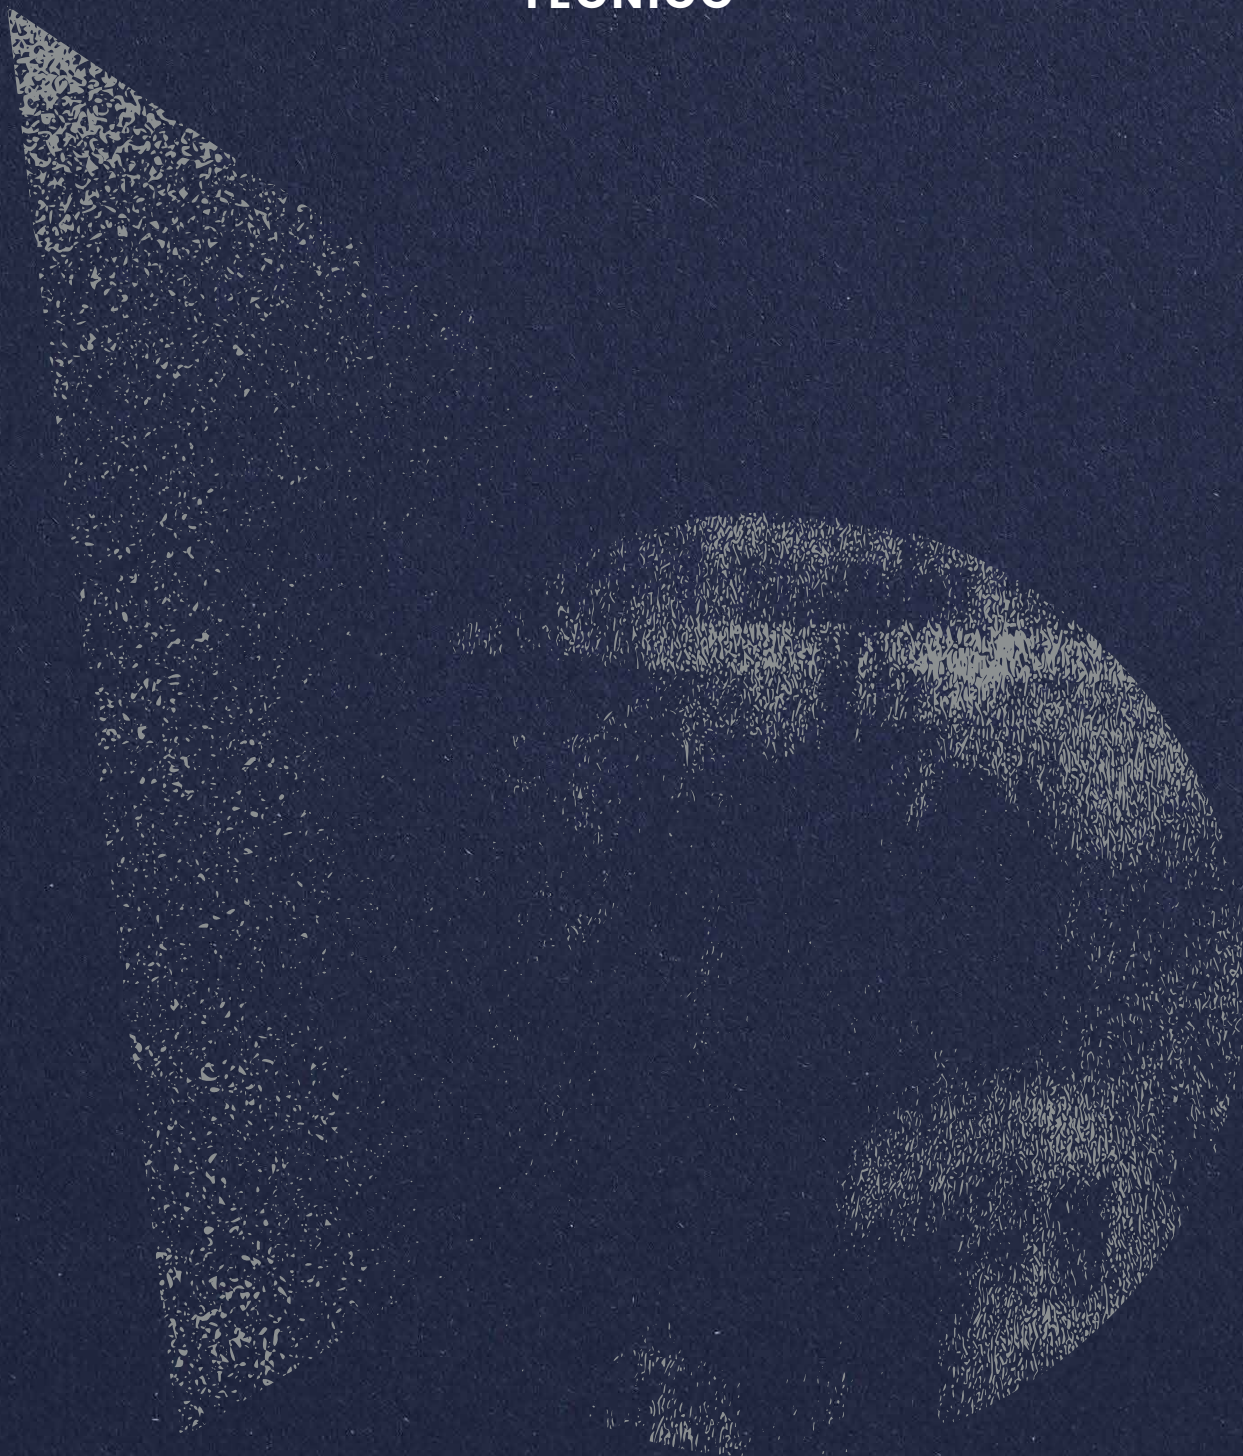

ONDATECH

TECNICO

Di padre in figlio

From father to son

La storia del Gruppo Ciciriello ha origine negli anni '80 nella città di Andria, ai piedi del maestoso Castel del Monte. In questi luoghi intrisi di storia e tradizioni, tra i rigogliosi ulivi e le cattedrali, Giovanni Ciciriello, un commerciante dalla lungimirante visione imprenditoriale, poggia il primo mattone della sua azienda, trasmettendo sogni e progetti ai suoi figli. Oggi il figlio Alessandro è amministratore di Ciciriello Group, mentre a Riccardo è affidato il ruolo di responsabile risorse umane. Alessandro Ciciriello con grande dedizione, sacrificio e perseveranza, ha tramutato i sogni del "Patron" Giovanni in realtà importanti, sempre al passo con i tempi per idee, prodotti e tecnologie.

The history of Ciciriello Group has its origins in the 1980s in the city of Andria, at the foot of majestic Castel del Monte. In these places steeped in history and traditions, among the luxuriant olive trees and cathedrals, Giovanni Ciciriello, a merchant with a forward-looking entrepreneurial vision, puts the first brick of his company, transmitting dreams and projects to his sons. Today Alessandro is the director of Ciciriello Group, while Riccardo is entrusted with the role of human resources manager. Alessandro Ciciriello with great dedication, sacrifice and perseverance, has turned the dreams of the "Patron" Giovanni into important realities, always in step with times for ideas, products and technologies.



Il futuro è una promessa di innovazione, ricerca e creatività. Per noi significa continuare a plasmare prodotti che uniscono materiali di eccellenza, design distintivo e maestria artigianale. Con ogni creazione, mettiamo in luce l'unicità e lo stile di chi ci sceglie.

The future is a promise of innovation, research and creativity. For us, it means continuing to shape products that combine excellent materials, distinctive design and craftsmanship. With each creation, we highlight the uniqueness and style of those who choose us.

L'innovazione è il cuore pulsante dei nostri processi produttivi, unita indissolubilmente alla cura artigianale che ci contraddistingue. È così che diamo forma a un'azienda dinamica, capace di cogliere le sfide del mercato e sfruttare al meglio le tecnologie più avanzate. Ma ciò in cui crediamo davvero è il potere della tradizione che incontra l'innovazione: la sapienza delle mani esperte, l'intuizione creativa, l'esperienza che dialoga con le idee del futuro. Ogni progetto è per noi una sfida da affrontare con passione, trasformando sogni in luce, spazio, casa.

Innovation is the beating heart of our production processes, indissolubly combined with the craftsmanship that distinguishes us. This is how we shape a dynamic company capable of meeting market challenges and making the most of the latest technologies. However, what we really believe in is the power of tradition that meets innovation: the wisdom of skilled hands, creative intuition, and experience that dialogues with the ideas of the future. Every project is a challenge for us to take on with passion, turning dreams into light, space, home.



Casa Ciciriello: la bellezza di sentirsi a casa ogni giorno
Ciciriello house: the beauty of feeling at home every day

“La casa è il nostro corpo più grande”
“The house is our largest body” Khalil Gibran

La casa non è solo un luogo, ma un rifugio dove sentirsi autenticamente se stessi. Un posto in cui tornare e pensare: “Che meraviglia!”. Casa Ciciriello nasce proprio da questa idea: rendere ogni abitazione uno spazio unico, capace di emozionare chi la vive e incantare gli occhi di chi la visita. Con passione e attenzione, offriamo ai nostri clienti la possibilità di arredare e illuminare la propria casa, rispettando i loro gusti, la loro personalità e le emozioni che desiderano vivere in ogni ambiente.

Home is not just a place, but a refuge where you can feel authentically yourself. A place to go back to every day, thinking about how wonderful is! Ciciriello House arises precisely from this idea: to make every home a unique space, capable of exciting those who live in it and enchanting the eyes of those who visit it. With passion and care, we offer our clients the opportunity to furnish and illuminate their homes, respecting their tastes, personality and the emotions they wish to experience in each room.

Capodarte



Ikone



Modo



Bluelife



Lux Illuminazione

ONDATECH

ONDALUCE

LUX
illuminazione

CAPODARTE
HOME FURNITURE

IKONE

Bluelife
BATHROOM COLLECTION

modo

Sette brand, un’unica grande famiglia. Ogni marchio racconta una storia unica, con la propria vocazione, il proprio spazio e una visione distinta del futuro. Ondaluce, Ondatech, Capodarte, Bluelife, Ikone, Modo e Lux Illuminazione sono oggi nomi di riferimento, riconosciuti e amati dai consumatori. Sette interpretazioni dell’inconfondibile stile italiano, capaci di unire tradizione e innovazione nel settore dell’illuminazione e dell’arredamento. Marchi che, in breve tempo, hanno superato i confini nazionali, conquistando mercati e cuori in tutto il mondo.

Seven brands, one big family. Each brand tells a unique story, with its own vocation, its own space, and a distinct vision of the future. Ondaluce, Ondatech, Capodarte, Bluelife, Ikone, Modo e Lux Illuminazione are now reference names, recognized and loved by consumers. Seven interpretations of the unmistakable Italian style, capable of combining tradition and innovation in lighting and furniture. Brands that, in a short time, have gone beyond national borders, gaining markets and hearts around the world.

Ondaluce



Ondatech




ONDATECH

ONDATECH rappresenta l'evoluzione in ambito Lighting di casa CICIRIELLO. Questo progetto punta a garantire al cliente ampi spazi di personalizzazione, sia sotto l'aspetto tecnico che formale.

ONDATECH represents the evolution in the lighting field of CICIRIELLO. This project aims to guarantee the customer ample space for customization, both from a technical and formal point of view.



ONDATECH risponde ad esigenze di progetto indoor ed outdoor, fornendo anche soluzioni ambivalenti da installare liberamente sia all'interno che all'esterno. Lavoriamo costantemente nell'ottica di coprire tutte le esigenze polisfaccettate della nostra clientela, in Italia e nel mondo. ONDATECH responds to indoor and outdoor project needs, also providing ambivalent solutions to be installed freely both inside and outside. We work constantly with a view to covering all the multifaceted needs of our customers, in Italy and around the world.

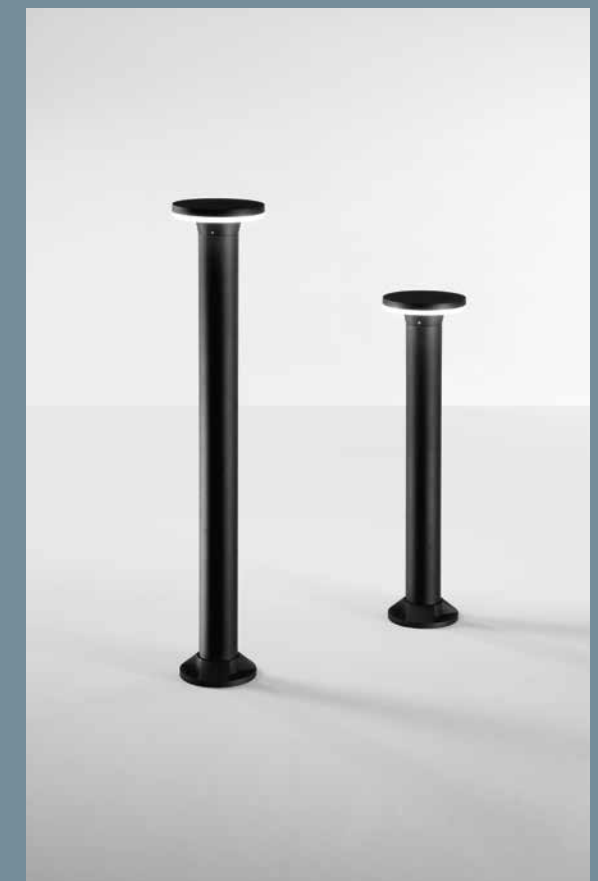

Indice alfabetico
Alphabetical index

Ageha	191
Agos	232
Aloa	263
Aloa ceiling	224
Ares applique	314
Ares paletto	284
Base	344
Bath	169
Baum	222
Baya	183
Beach	168
Boiler	216
Bow	235
Cily	298
Comb	196
Cromie	176
Cube	296
Daft	170
DC10	192
Digital	186
Double cube	294
Duel	150
Egg	155

Exagon	254
Fabius	334
Fabric	172
Falco	312
Fall	248
Fat	199
Fiji	370
Filo	262
Filo ceiling	225
Flat	240
Floor round	355
Floor square	354
Fog	234
Free round	349
Free square	348
Funky	204
Fonte round	321
Fonte square	320
Ghita	310
Gibò	182
Globus	212
Goa	360
Grass double	279

Grass single	296
Guaba	162
Guru	363
Half	210
Jazz	201
Jubo	330
Kitty	166
Lampo	174
Levels	194
Lila	259
Lilium	258
Limbo	206
Linus	332
Liscio	207
Lost	144
Lucifer	272
Macao	366
Mad	152
Malta applique	318
Malta paletto	282
MD	195/197
Migo	181
Milo	228

Ministry	190
Mirta	276
Nature	266
Neo	358
Nevada	328
Nevio	306
Ninja	302
Noa	260
Omnia	154
Output	156
Pacha	184
Paris	342
Patio	336
Petar	340
Picca	338
Planet	188
Plate	246
Pou applique	316
Pou paletto	286
Punk	198
Raissa	274
Rex	142
Ring	120

Rock ceiling	226
Round	32
Rumba	200
Sasha	230
Sella	242
Shade	352
Shadow	238
Simba	290
Simba/pc	291
Slim	58
Sonny	304
Square	78
Stage	157
Stan	236
Sub	164
Tap	368
Telescope	244
Tenax	180
Teta	308
Teta/pc	308
Tresor	160
Tube	252
Tubic	256

Tuono	179
Valley	178
Valzer	205
Viale	270
Womb circle	147
Womb square	146
Zenda	300
Zeno round	323
Zeno round 2	322
Zeno square	327
Zeno square 2	326

DRIVER

Driver attacco magnetico Magnetic attachment driver	56 118
Driver Slim attacco magnetico Slim magnetic attachment driver	76
Driver magnetico curvo per Ø 800 – Ø 1000 Curved magnetic driver for Ø 800 – Ø 1000	138
Driver remoto Remote driver	56 76 118 138
Driver remoto per sospensione rigida Remote driver for rigid suspension	57 119
Driver Neo IP67 IP67 Neo driver	359


Binari magnetici 48V

48V magnetic tracks

Nelle pagine seguenti verranno presentati diversi sistemi di illuminazione a 48V. Si tratta di sistemi modulari che consentono soluzioni ampiamente personalizzabili, adatte per ambienti differenti, sia per estensione che per esigenze illuminotecniche. La molteplicità degli elementi luminosi, dei sistemi di alimentazione e di installazione offrono risposte mirate e customizzate. Le modalità di aggancio e sgancio dei corpi luminosi garantiscono soluzioni modificabili nel tempo, qualora si renda necessario un mutamento dello scenario luminoso desiderato. I corpi luminosi possono scorrere fino al punto di volta in volta desiderato, aggiunti o rimossi a piacimento. Several 48V lighting systems will be presented on the following pages. These are modular systems that allow widely customisable solutions, suitable for different environments, both in terms of size and lighting requirements. The variety of lighting elements, power supply and installation systems offer targeted and customised solutions. The coupling and uncoupling of the luminaries guarantee solutions that can be modified over time, if the desired lighting scenario needs to be changed. The luminaires can slide to the desired point, added or removed.

SLIM superficie

SLIM surface




Sistema a binario ultrasottile a superficie
Surface ultrathin track system

p. 64

SQUARE incasso

SQUARE recessed




Sistema a binario a sezione rettangolare a incasso
Recessed rectangular section track system

p. 84

SQUARE superficie

SQUARE surface




Sistema a binario a sezione rettangolare a superficie
Surface rectangular section track system

p. 90

SQUARE sospensione

SQUARE suspension



Kit per sospensione con cavi su SQUARE a superficie
Suspension kit with cables on SQUARE surface system

p. 115

Kit per sospensione rigida su sistema SQUARE a superficie
Rigid suspension kit on SQUARE surface system

p. 115

ROUND superficie

ROUND surface




Sistema a binario a sezione tonda a superficie
Surface round section track system

p. 40

ROUND sospensione

ROUND suspension



Kit per sospensione con cavi su sistema ROUND a superficie
Suspension kit with cables on ROUND surface system

p. 55

Kit per sospensione rigida su sistema ROUND a superficie
Rigid suspension kit on ROUND surface system

p. 55

Binari magnetici 48V
48V magnetic tracks

RING incasso
RING recessed

nero
black

Sistema a binario circolare a sezione rettangolare, ad incasso
Recessed rectangular section circular track system

p. 126

RING superficie
RING surface

oro nero
gold black

Sistema a binario circolare a sezione rettangolare, a superficie
Surface rectangular section circular track system

p. 128

Nelle pagine seguenti verranno presentati diversi sistemi di illuminazione a 48V. Si tratta di sistemi modulari che consentono soluzioni ampiamente personalizzabili, adatte per ambienti differenti, sia per estensione che per esigenze illuminotecniche. La molteplicità degli elementi luminosi, dei sistemi di alimentazione e di installazione offrono risposte mirate e customizzate. Le modalità di aggancio e sgancio dei corpi luminosi garantiscono soluzioni modificabili nel tempo, qualora si renda necessario un mutamento dello scenario luminoso desiderato. I corpi luminosi possono scorrere fino al punto di volta in volta desiderato, aggiunti o rimossi a piacimento.

Several 48V lighting systems will be presented on the following pages. These are modular systems that allow widely customisable solutions, suitable for different environments, both in terms of size and lighting requirements. The variety of lighting elements, power supply and installation systems offer targeted and customised solutions. The coupling and uncoupling of the luminaires guarantee solutions that can be modified over time, if the desired lighting scenario needs to be changed. The luminaires can slide to the desired point, added or removed.

RING sospensione
RING suspension


oro nero
gold black

Kit per sospensione con tre cavi su RING a superficie
Suspension kit with three cables on RING surface system

p. 136

ROUND

Corpi illuminanti Luminaires




ROUND superficie surface



 spot spotlight p. 44 	 spot spotlight p. 44 	 sfera LED LED sphere p. 45 	 elemento a luce diffusa diffuse light element p. 53 	
 elemento lineare linear element p. 52 	 elemento lineare linear element p. 52 	 elemento lineare linear element p. 52 		
 elemento beta beta element p. 50 	 elemento beta beta element p. 50 	 elemento beta beta element p. 50 		
 elemento beta orientabile adjustable beta element p. 51 	 elemento beta orientabile adjustable beta element p. 51 	 elemento beta orientabile adjustable beta element p. 51 		
 sospensione cilindrica cylindrical suspension p. 48 	 sospensione cilindrica cylindrical suspension p. 48 	 sospensione goccia drop suspension p. 46 	 sospensione sfera sphere suspension p. 49 	 vetro ALFA medio ALFA medium glass p. 49 

SLIM

Corpi illuminanti Luminaires




SLIM superficie surface



 spot spotlight p. 68 	 spot spotlight p. 68 	
 elemento lineare orientabile adjustable linear element p. 69 		
 elemento lineare linear element p. 71 	 elemento lineare linear element p. 71 	 elemento lineare linear element p. 71 
 elemento beta beta element p. 70 	 elemento beta beta element p. 70 	 elemento beta beta element p. 70 
 sospensione cilindrica cylindrical suspension p. 72 	 sospensione cilindrica cylindrical suspension p. 72 	

SQUARE

Corpi illuminanti Luminaires







SQUARE incasso recessed

SQUARE superficie surface

 spot spotlight p. 96 	 spot spotlight p. 96 	 sfera LED LED sphere p. 98 	 elemento a luce diffusa diffuse light element p. 105 
 elemento lineare linear element p. 100 	 elemento lineare linear element p. 100 	 elemento lineare linear element p. 100 	
 elemento beta beta element p. 102 	 elemento beta beta element p. 102 	 elemento beta beta element p. 102 	
 elemento beta orientabile adjustable beta element p. 104 	 elemento beta orientabile adjustable beta element p. 104 	 elemento beta orientabile adjustable beta element p. 104 	
 elemento angolare complanare coplanar angle element p. 107 	 elemento angolare perpendicolare perpendicular angle element p. 107 		



 sospensione cilindrica cylindrical suspension p. 109 	 sospensione cilindrica cylindrical suspension p. 109 	 sospensione goccia drop suspension p. 110 	 sospensione sfera sphere suspension p. 110 	 vetro ALFA medio ALFA medium glass p. 110 
--	--	---	--	---

 spot con attacco curvo spotlight with curved attachment p. 97 	 sfera LED con attacco curvo LED sphere with curved attachment p. 99 	 elemento lineare curvo curved linear element p. 101 	 elemento beta curvo curved beta element p. 103 	Corpi illuminanti con attacco curvo, compatibili con connessioni curve (e collezione RING). Luminaires with curved attachment, compatible with curved connections (and RING collection).
--	--	--	---	---

RING

Corpi illuminanti Luminaires



spot con attacco curvo
spotlight with curved attachment
p. 132



sfera LED con attacco curvo
LED sphere with curved attachment
p. 133



Corpi illuminanti con attacco curvo per sistema Ring (adatti anche a connessioni curve sistema Square).
Luminaires with curved attachment for Ring system (also suitable for curved connections of Square system).



elemento lineare curvo Ø 800
curved linear element Ø 800
p. 134



elemento beta curvo Ø 800
curved beta element Ø 800
p. 135



elemento lineare curvo Ø 1000
curved linear element Ø 1000
p. 134



elemento beta curvo Ø 1000
curved beta element Ø 1000
p. 135



DRIVER



driver attacco magnetico
magnetic attachment driver

p. 56 / 118



driver Slim attacco magnetico
Slim magnetic attachment driver
p. 76



driver magnetico curvo per Ø 800 - Ø 1000
curved magnetic driver for Ø 800 - Ø 1000
p. 138



driver remoto
remote driver

p. 56 / 76 / 118 / 138



driver remoto per sospensione rigida
remote driver for rigid suspension
p. 57 / 119

driver Neo IP67
IP67 Neo driver

p. 377

Faretti da incasso
Recessed spotlights

INTERNO INDOOR

				
Ageha p. 191	Bath p. 169	Baya p. 183	Beach p. 168	Comb p. 196
				
Cromie p. 176	Daft p. 170	DC10 p. 192	Digital p. 186	Duel p. 150
				
Egg p. 155	Fabric p. 172	Fat p. 199	Gibò p. 182	Guaba p. 162
				
Jazz p. 201	Kitty p. 166	Lampo p. 174	Levels p. 194	Lost p. 144
				
Mad p. 152	MD p. 195 / 197	Migo p. 181	Ministry p. 190	Omnia p. 154
				
Output p. 156	Pacha p. 184	Planet p. 188	Punk p. 198	Rex p. 142

				
Rumba p. 200	Stage p. 157	Sub p. 164	Tenax p. 180	Tresor p. 160
				
Tuono p. 179	Valley p. 178	Womb circle p. 147	Womb square p. 146	
Segnapassi Steplights INTERNO INDOOR				
				
Funky p. 204	Limbo p. 206	Liscio p. 207	Valzer p. 205	

Plafoniere e applique
Ceiling and wall lamps

INTERNO INDOOR

 Agos p. 232	 Aloa ceiling p. 224	 Baum p. 222	 Boiler p. 216	 Bow p. 235
 Fall p. 248	 Filo ceiling p. 225	 Flat p. 240	 Fog p. 234	 Globus p. 212
 Half p. 210	 Milo p. 228	 Plate p. 246	 Rock ceiling p. 226	 Sasha p. 230
 Sella p. 242	 Shadow p. 238	 Stan p. 236	 Telescope p. 244	

Minimal
Minimal

INTERNO INDOOR

 Aloa p. 263	 Exagon p. 254	 Filo p. 262	 Lila p. 259	 Lilium p. 258
 Noa p. 260	 Tube p. 252	 Tubic p. 256		

Paletti
Bollards

ESTERNO OUTDOOR

				
Ares p. 284	Grass double p. 279	Grass single p. 278	Lucifer p. 272	Malta p. 282
				
Mirta p. 276	Nature p. 266	Pou p. 286	Raissa p. 274	Viale p. 270

Plafoniere e applique
Ceiling and wall lamps

ESTERNO OUTDOOR

				
Ares p. 314	Base p. 344	Cily p. 298	Cube p. 296	Double cube p. 294
				
Fabius p. 334	Falco p. 312	Fonte round p. 321	Fonte square p. 320	Ghita p. 310
				
Jubo p. 330	Linus p. 332	Malta p. 318	Nevada p. 328	Nevio p. 306
				
Ninja p. 302	Paris p. 342	Patio p. 336	Petar p. 340	Picca p. 338

Plafoniere e applique
Ceiling and wall lamps

ESTERNO OUTDOOR

 Pou p. 316	 Simba p. 290	 Simba/pc p. 291	 Sonny p. 304	 Teta p. 308
 Teta/pc p. 308	 Zenda p. 300	 Zeno round p. 323	 Zeno round 2 p. 322	 Zeno square p. 327
 Zeno square 2 p. 326				

Segnapasso e faretti calpestabili
Steplights and walkable spotlights

ESTERNO OUTDOOR

 Floor round p. 355	 Floor square p. 354	 Free round p. 349	 Free square p. 348	 Goa p. 360
 Guru p. 363	 Neo p. 358	 Shade p. 352		

Lampade da tavolo ricaricabili
Rechargeable table lamps

ESTERNO OUTDOOR

 Fiji p. 370	 Macao p. 366	 Tap p. 368
---	--	--

Come leggere il catalogo
How to read the catalog



indoor

30 **Binari magnetici 48V**
48V magnetic tracks

140 **Faretti da incasso**
Recessed spotlights

202 **Segnapassi**
Steplights

208 **Plafoniere e applique**
Ceiling and wall lamps

250 **Minimal**
Minimal


264 **Paletti**
Bollards

288 **Plafoniere e applique**
Ceiling and wall lamps

346 **Segnapassi e faretti calpestabili**
Steplights and walkable spotlights

364 **Lampade da tavolo ricaricabili**
Rechargeable table lamps

372 **Legenda e condizioni di vendita**
Legend and sale conditions

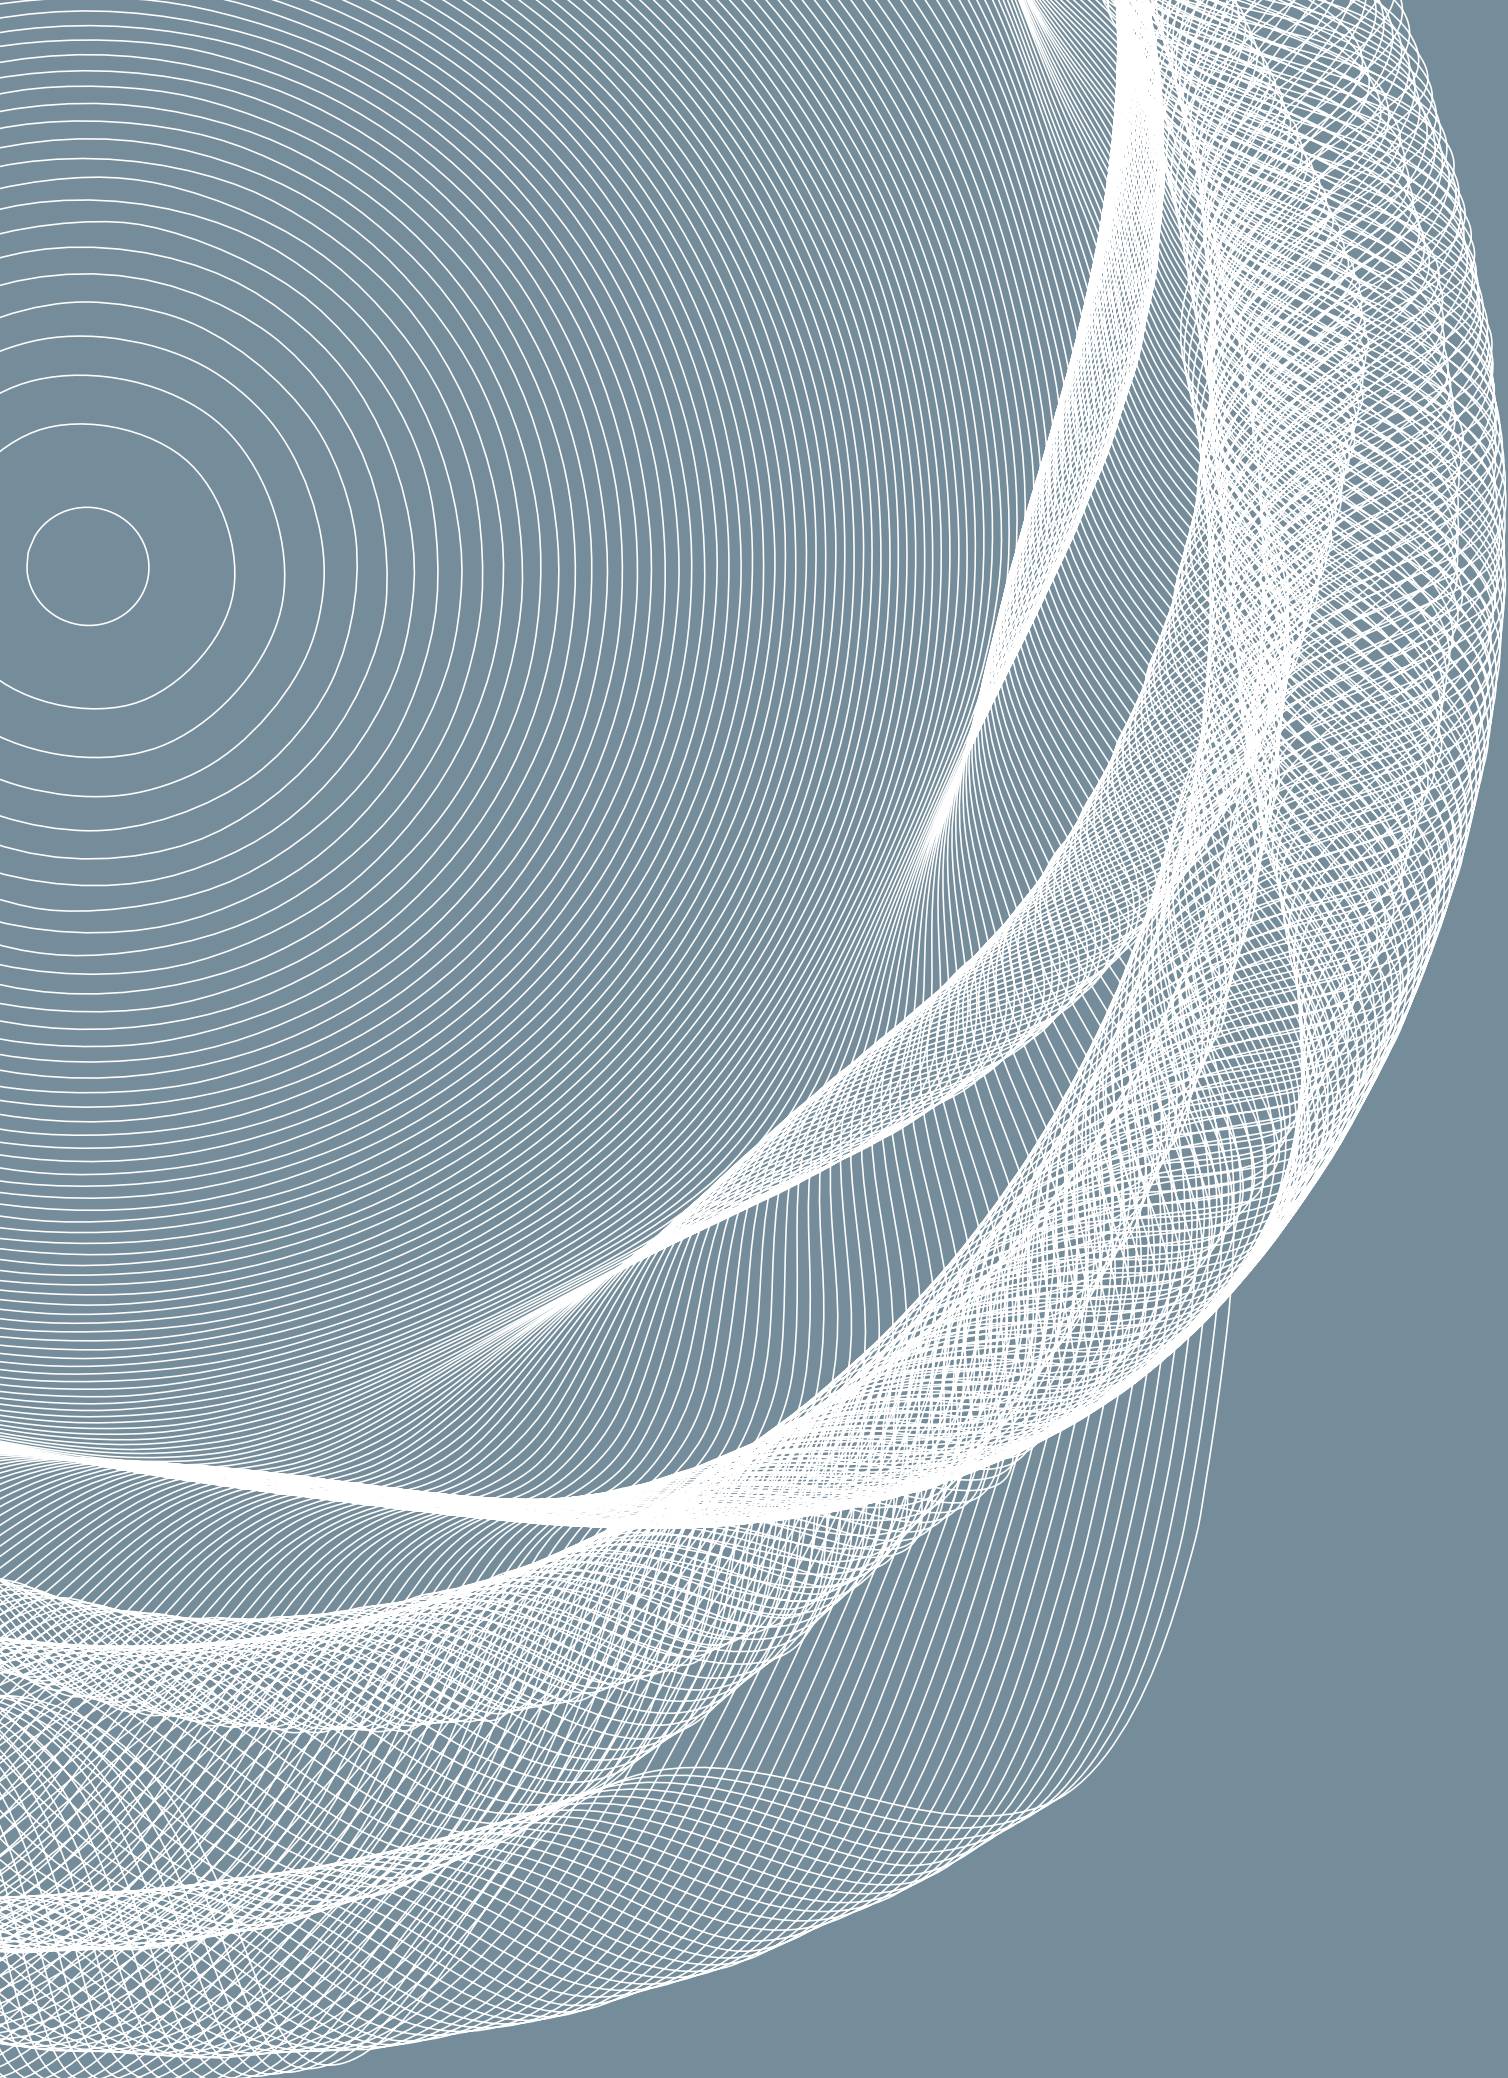

indoor

Binari magnetici 48V


48V magnetic tracks

Round

Sistema modulare a binario magnetico 48V con sezione tonda. Installazione a superficie. Sospensione realizzabile con appositi KIT. Possibilità di disposizione a reticolo grazie all'elemento trasverso. Aggancio a incastro magnetico.
48V magnetic track modular system with round section. Surface installation. Suspension achievable with specific KITS. Possibility of lattice arrangement due to the transverse element. Magnetic interlocking attachment.



ROUND
Superficie Surface



BINARI MAGNETICI 48V 48V MAGNETIC TRACKS



ROUND SUPERFICIE ROUND SURFACE



BINARI MAGNETICI 48V 48V MAGNETIC TRACKS

ROUND SUPERFICIE ROUND SURFACE



BINARI MAGNETICI 48V 48V MAGNETIC TRACKS


ROUND SUPERFICIE ROUND SURFACE



BINARI MAGNETICI 48V 48V MAGNETIC TRACKS

Binario magnetico 48V 48V magnetic track

binario a superficie
surface track





ROUND superficie surface

Round superficie
Round surface



Binario modulare in alluminio a sezione circolare , 48Vdc. Completo di due elementi di chiusura finali. Installazione a superficie. Kit per sospensioni disponibili, acquistabili separatamente. Barra da 2 metri, è possibile tagliarla per regolarne la lunghezza. Gli accessori per l' alimentazione elettrica e la connessione di più moduli sono necessari e non inclusi.
Aluminium modular track with round section, 48Vdc. Complete with two end caps. Surface installation. Suspension kits available, purchased separately. 2m bar, possibility of adjusting its length by cutting.
Accessories for power supply and connection of multiple modules are required and not included.

- corpi illuminanti
luminaires
p. 44
- accessori
accessories
p. 54
- driver e alimentazione
driver and power supply
p. 56

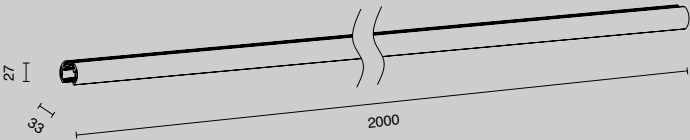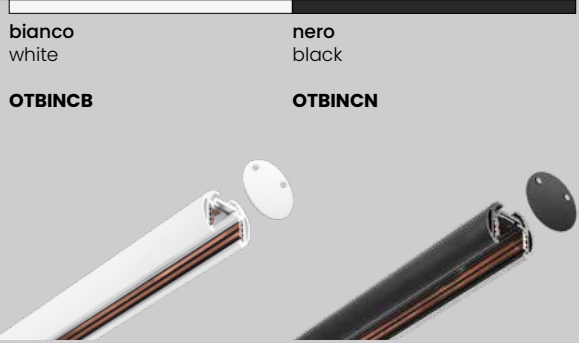

1,32 Kg 0,0021 m³

ROUND SUPERFICIE ROUND SURFACE

ROUND superficie

ROUND surface

Schema di installazione Installation scheme



Sistema modulare a binario magnetico 48V con sezione tonda. Installazione a superficie. Sospensione realizzabile con appositi KIT. Possibilità di disposizione a reticolo grazie all'elemento trasverso. Aggancio a incastro magnetico.

48V magnetic track modular system with round section. Surface installation. Suspension achievable with specific KITS. Possibility of lattice arrangement due to the transverse element. Magnetic interlocking attachment.



SOSPENSIONE opzione 1
SUSPENSION option 1

kit sospensione con cavetti
suspension kit with cables

OTKITS
p. 55

SOSPENSIONE opzione 2
SUSPENSION option 2

asta per sospensione rigida
rod for rigid suspension

OTPLB OTPLN
p. 55

ALIMENTAZIONE opzione 1
POWER SUPPLY option 1

driver per sospensione rigida
driver for rigid suspension

OTDRC
p. 57

asta per sospensione rigida con cover per driver
rod for rigid suspension with driver cover

OTPLDB OTPLDN
p. 55

modulo di input elettrico
electrical input module

OTMIB OTMIN
p. 57

ALIMENTAZIONE opzione 2
POWER SUPPLY option 2

driver magnetico
magnetic driver

OTD100 OTD150 OTD250
p. 56

ALIMENTAZIONE opzione 3
POWER SUPPLY option 3

driver remoto
remote driver

OTDS100 OTDS200
p. 56

cover per driver
driver cover

OTCVB OTCVN
p. 57

modulo di input elettrico
electrical input module

OTMIB OTMIN
p. 57

binario 48Vdc con chiusure finali incluse
48Vdc track with end caps included

OTBINCB OTBINCN
p. 41

connettore elettrico lineare
linear electrical connector

OTCNB OTCNN
p. 55

giunto meccanico
mechanical joint

OTCB OTCN
p. 54

elemento binario trasverso
transverse track element

OTPERCB OTPERCN
p. 54

elemento binario trasverso
transverse track element

OTPERCB OTPERCN
p. 54


corpi illuminanti luminaires

spot spotlight	sfera LED LED sphere	elemento a luce diffusa diffuse light element	elemento lineare linear element	elemento beta beta element	elemento beta orientabile adjustable beta element	sospensione cilindrica cylindrical suspension	sospensione sfera sphere suspension	sospensione goccia drop suspension
p. 44	p. 45	p. 53	p. 52	p. 50	p. 51	p. 48	p. 49	p. 46

Compatibili con i sistemi ROUND e SQUARE / Compatible with ROUND and SQUARE systems

Spot Spotlight

compatibile con i seguenti binari
compatible with the following tracks

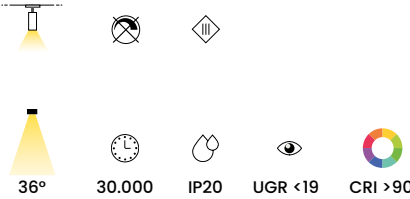

Faretto orientabile LED a 48Vdc in alluminio. Diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con binario ROUND (OTBINCN-OTBINCB) e con elemento ROUND trasverso (OTPERCN-OTPERCB). Adatto anche a sistemi SQUARE. COB Bridgelux. Non dimmerabile.


48Vdc LED adjustable spotlight made of aluminium. Polycarbonate diffuser. Magnetic interlocking attachment. Compatible with ROUND track (OTBINCN-OTBINCB) and transverse ROUND element (OTPERCN-OTPERCB). Also suitable for SQUARE systems. Bridgelux COB. Non-dimmable.



sorgente luminosa
light source
LED

power: 7W
voltage: 48Vdc
light temperature: 3000K
lumens: 546LM

0,20 Kg 0,00014 m³



bianco
white

OTSP7B



oro
gold

OTSP7G




nero
black

OTSP7N



power: 15W
voltage: 48Vdc
light temperature: 3000K
lumens: 1170LM

0,35 Kg 0,00034 m³



bianco
white

OTSP15B



oro
gold

OTSP15G




nero
black

OTSP15N




Sfera LED LED sphere

compatibile con i seguenti binari
compatible with the following tracks

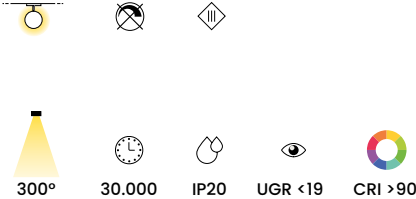

Sfera LED a 48Vdc in alluminio. Diffusore in vetro. Attacco ad incastro magnetico. Compatibile con binario ROUND (OTBINCN-OTBINCB) e con elemento ROUND trasverso (OTPERCN-OTPERCB). Adatto anche a sistemi SQUARE. COB Bridgelux. Non dimmerabile.


48Vdc LED sphere made of aluminium. Glass diffuser. Magnetic interlocking attachment. Compatible with ROUND track (OTBINCN-OTBINCB) and transverse ROUND element (OTPERCN-OTPERCB). Also suitable for SQUARE systems. Bridgelux COB. Non-dimmable.

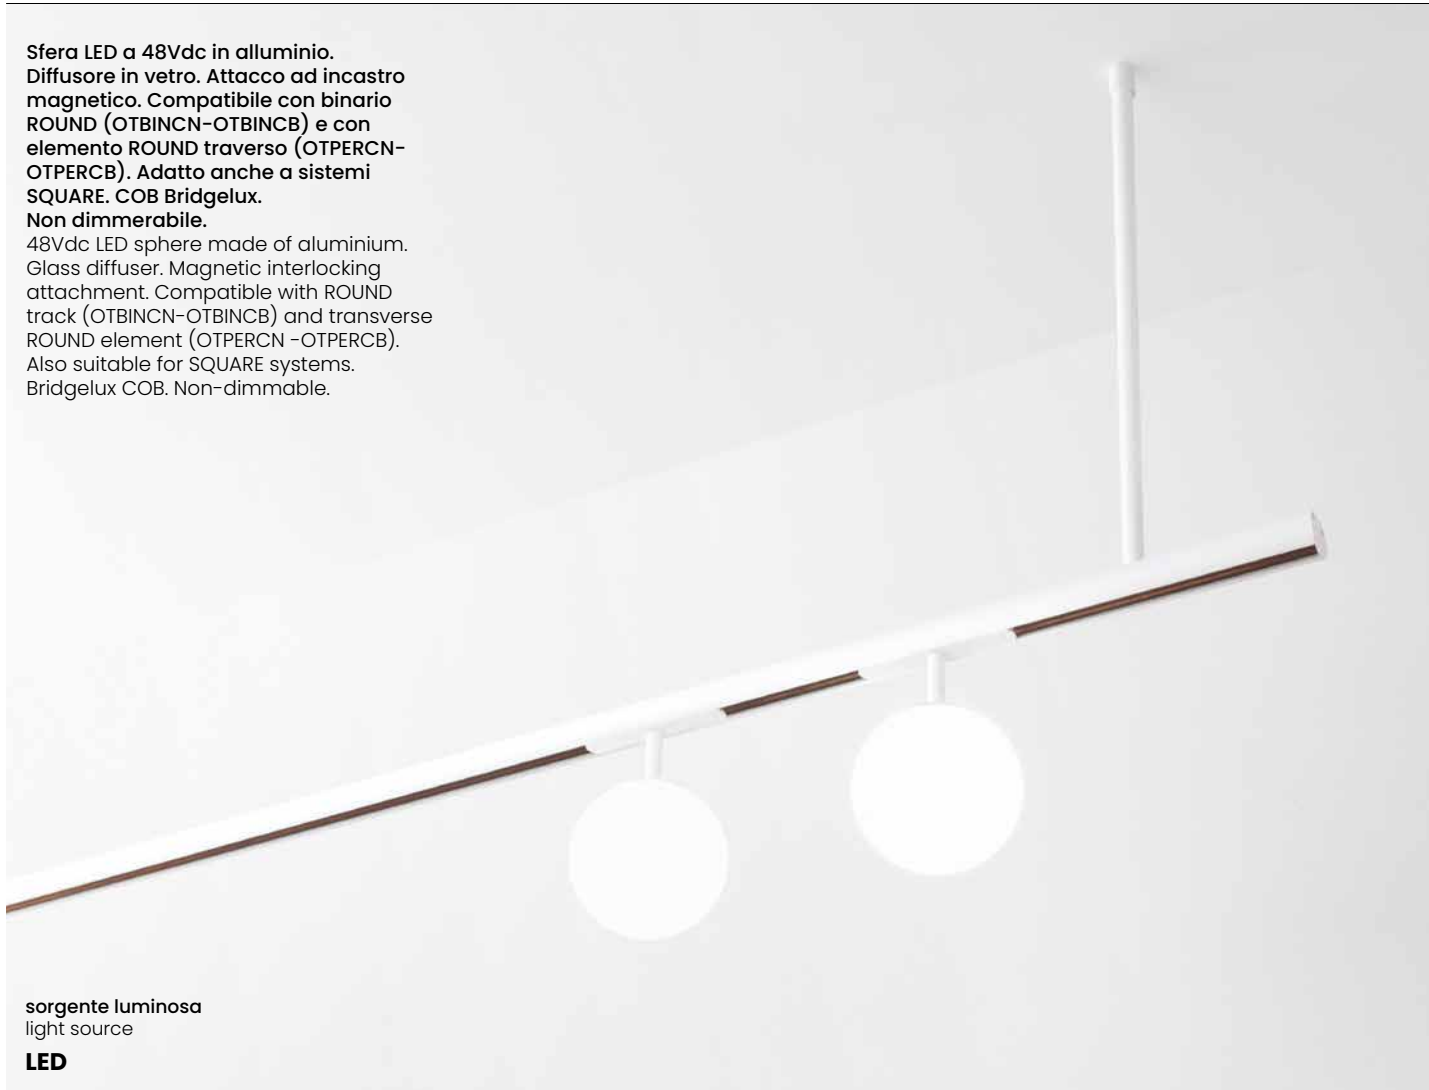

sorgente luminosa
light source
LED

power: 8W
voltage: 48Vdc
light temperature: 3000K
lumens: 624LM

0,41 Kg 0,003 m³



bianco
white

OTPB



oro
gold

OTPBG




nero
black

OTPBN



Sospensione a goccia Drop suspension


compatibile con i seguenti binari
compatible with the following tracks



ROUND superficie surface



SQUARE incasso recessed



SQUARE superficie surface



38°



30.000



IP20



UGR <19



CRI >90

Elemento LED a goccia a sospensione a 48Vdc, in alluminio. Diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con binario ROUND (OTBINCN-OTBINCB) e con elemento ROUND trasverso (OTPERCN-OTPERCB). Adatto anche a sistemi SQUARE. Cavetti regolabili. COB Bridgelux. Non dimmerabile.

48Vdc LED drop suspension element made of aluminium. Polycarbonate diffuser. Magnetic interlocking attachment. Compatible with ROUND track (OTBINCN-OTBINCB) and transverse ROUND element (OTPERCN-OTPERCB). Also suitable for SQUARE systems. Adjustable cables. Bridgelux COB. Non-dimmable.

Regolazione cavi a pag. 57
Cable adjustment p. 57

sorgente luminosa
light source

LED


power: 4W
voltage: 48Vdc
light temperature: 3000K
lumens: 312LM

bianco
white

OTSOB

nero
black

OTSON




0,24 Kg



0,00014 m³

Sospensione cilindrica Cylindrical suspension

compatibile con i seguenti binari
compatible with the following tracks

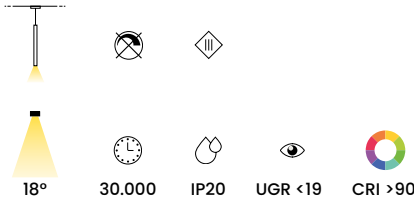

Elemento cilindrico LED a 48Vdc in alluminio. Diffusore in polycarbonato. Disponibile ottica (OTLENS) per ottenere un angolo di emissione luminosa di 38°.

Attacco ad incastro magnetico. Compatibile con binario ROUND (OTBINCN-OTBINCB) e con elemento ROUND trasverso (OTPERCN-OTPERCB). Adatto anche a sistemi SQUARE. Cavetti regolabili. COB Bridgelux. Non dimmerabile.


48Vdc LED cylindrical element made of aluminium. Polycarbonate diffuser. Available lens (OTLENS) to obtain a beam angle of 38°.

Magnetic interlocking attachment. Compatible with ROUND track (OTBINCN-OTBINCB) and transverse ROUND element (OTPERCN-OTPERCB). Also suitable for SQUARE systems. Adjustable cables. Bridgelux COB. Non-dimmable.

Regolazione cavi e montaggio lente a pag. 57
Cable adjustment and lens assembly p. 57

Ottica opzionale in materiale plastico compatibile con sospensione cilindrica. Per ottenere un'apertura del fascio luminoso pari a 38°.

Optional plastic lens, compatible with cylindrical suspension, to obtain a beam angle of 38°.

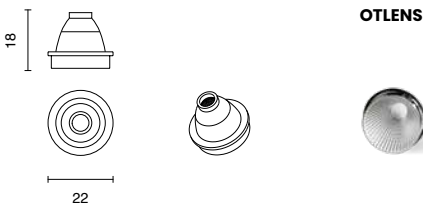

sorgente luminosa
light source
LED



power: 6W
voltage: 48Vdc
light temperature: 3000K
lumens: 468LM

0,33 Kg 0,00014 m³

max 1500
200
Ø 26

bianco white
OTTPB

oro gold
OTTPG

nero black
OTTPN

power: 6W
voltage: 48Vdc
light temperature: 3000K
lumens: 468LM

0,54 Kg 0,00028 m³

max 1500
400
Ø 26


bianco white
OTTGB

oro gold
OTTGG

nero black
OTTGN

Sospensione a sfera Sphere suspension

compatibile con i seguenti binari
compatible with the following tracks

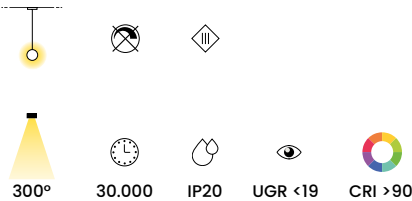

Elemento a sospensione a 48Vdc in alluminio. Diffusore in vetro. Attacco ad incastro magnetico. Compatibile con binario ROUND (OTBINCN-OTBINCB) e con elemento ROUND trasverso (OTPERCN-OTPERCB). Adatto anche a sistemi SQUARE. Cavetti regolabili. COB Bridgelux. Non dimmerabile. Compatibile con vetri ALFA medio, acquistabili separatamente.

48Vdc suspension element made of aluminium. Glass diffuser. Magnetic interlocking attachment. Compatible with ROUND track (OTBINCN-OTBINCB) and transverse ROUND element (OTPERCN-OTPERCB). Also suitable for SQUARE systems. Adjustable cables. Bridgelux COB. Non-dimmable. Compatible with ALFA medium glasses, purchased separately.

Regolazione cavi a pag. 57
Cable adjustment p. 57

sorgente luminosa
light source
LED



power: 8W
voltage: 48Vdc
light temperature: 3000K
lumens: 624LM

0,48 Kg 0,0028 m³

max 1530
Ø 150

bianco white
OTSBB

oro gold
OTSBG

nero black
OTSDN

Vetro ALFA medio
ALFA medium glass

0,1 Kg 0,02 m³

Ø 240
Ø 110
Ø 200
230

trasparente transparent
ALFA/MD-TRASP

ottanio octane
ALFA/MD-OTTANIO


verde green
ALFA/MD-VERDE

ambra amber
ALFA/MD-AMBRA

fumé smoky
ALFA/MD-FUME

Elemento beta Beta element

compatibile con i seguenti binari
compatible with the following tracks

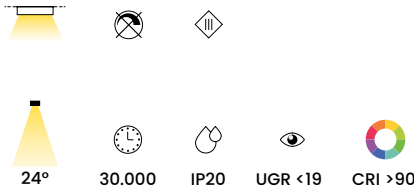

power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 1006LM

0,17 Kg 0,0002 m³

bianco
white

OTFA12B

nero
black

OTFA12N

power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 2012LM

0,31 Kg 0,00041 m³

bianco
white

OTFA24B

nero
black

OTFA24N

power: 36W
voltage: 48Vdc
light temperature: 3000K
lumens: 3018LM

0,43 Kg 0,00062 m³

bianco
white


OTFA36B

nero
black

OTFA36N

Elemento beta orientabile Adjustable beta element

compatibile con i seguenti binari
compatible with the following tracks

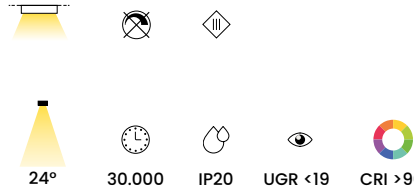

power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 1006LM

0,31 Kg 0,00059 m³

bianco
white

OTFAR12B

nero
black

OTFAR12N

power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 2012LM

0,58 Kg 0,0011 m³

bianco
white

OTFAR24B

nero
black

OTFAR24N

power: 36W
voltage: 48Vdc
light temperature: 3000K
lumens: 3018LM

0,83 Kg 0,0016 m³

bianco
white


OTFAR36B

nero
black

OTFAR36N


Elemento lineare Linear element

compatibile con i seguenti binari
compatible with the following tracks

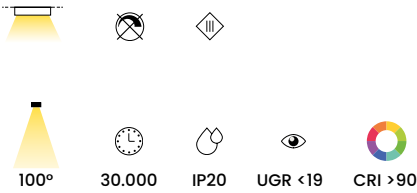

power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 936LM

0,20 Kg 0,00029 m³



bianco
white
OTLI12B




nero
black
OTLI12N



power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 1872LM

0,39 Kg 0,00058 m³



bianco
white
OTLI24B




nero
black
OTLI24N



power: 36W
voltage: 48Vdc
light temperature: 3000K
lumens: 2808LM

0,53 Kg 0,00087 m³



bianco
white
OTLI36B




nero
black
OTLI36N



Elemento a luce diffusa Diffuse light element

compatibile con i seguenti binari
compatible with the following tracks

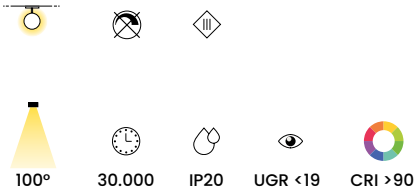


Elemento a luce diffusa orientabile a 48Vdc in alluminio. Diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con binario ROUND (OTBINCN-OTBINCB) e con elemento ROUND trasverso (OTPERCN-OTPERCB). Adatto anche a sistemi SQUARE. LED Bridgelux. Non dimmerabile.
48Vdc adjustable diffuse light element made of aluminium. Polycarbonate diffuser. Magnetic interlocking attachment. Compatible with ROUND track (OTBINCN - OTBINCB) and transverse ROUND element (OTPERCN-OTPERCB). Also suitable for SQUARE systems. Bridgelux LED. Non-dimmable.



power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 936LM

0,41 Kg 0,00027 m³



bianco
white
OTPRB




nero
black
OTPRN




Accessori Accessories

ROUND superficie surface



Binario a superficie
Surface track

Binario modulare in alluminio a sezione circolare, 48Vdc. Completo di due elementi di chiusura finali. Installazione a superficie. Kit per sospensioni disponibili, acquistabili separatamente. Barra da 2 metri, è possibile tagliarla per regolarne la lunghezza. Gli accessori per l'alimentazione elettrica e la connessione di più moduli sono necessari e non inclusi. Aluminium modular track with round section, 48Vdc. Complete with two end caps. Surface installation. Suspension kits available, purchased separately. 2m bar, possibility of adjusting its length by cutting. Accessories for power supply and connection of multiple modules are required and not included.


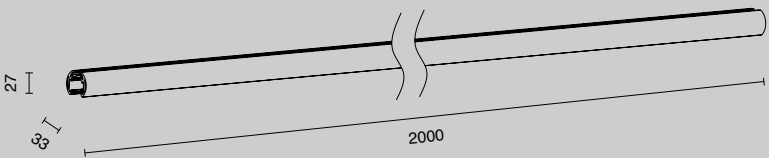


1,32 Kg
0,0021 m³

Lunghezza Lenght 2000 mm


Giunto meccanico
Mechanical joint

Elemento in acciaio per la connessione meccanica di due binari ROUND (OTBINCB-OTBINCN). Necessario l'uso del connettore elettrico lineare (OTCNN-OTCNB). Steel element for mechanical connection of two ROUND tracks (OTBINCB-OTBINCN). Use of the linear electrical connector required (OTCNN-OTCNB).

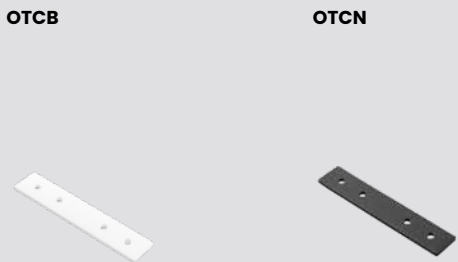

Elemento a binario trasverso
Transverse track element


Elemento a binario in alluminio a sezione circolare, 48Vdc. Completo di due elementi di chiusura finali. Installazione ad attacco magnetico tra due binari ROUND. Barra da 1 metro non sezionabile. Giunto meccanico e connettore elettrico non necessari. Aluminium track element with round section, 48Vdc. Complete with two end caps. Magnetic attachment installation between two ROUND tracks. 1m bar not sectionable. Mechanical joint and electrical connector not necessary.

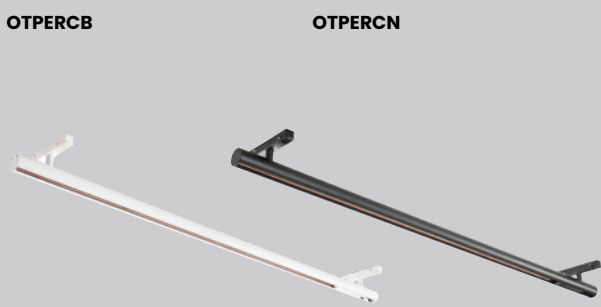

1 Kg
0,002 m³

Kit sospensione
Suspension kit


Kit per sospensione con 2 cavi di acciaio compatibile con binario ROUND. Adatto anche a sistema SQUARE superficie. Suspension kit with two steel cables, compatible with ROUND track. Also suitable for SQUARE surface system.




OTKITS



Asta per sospensione rigida compatibile con binario ROUND. Adatto anche a sistema SQUARE superficie. Rod for rigid suspension, compatible with ROUND track. Also suitable for SQUARE surface system.

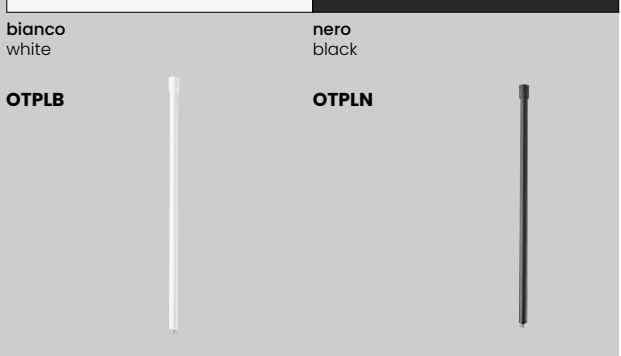


Asta per sospensione rigida con cover per driver OTDRC, compatibile con binario ROUND. Adatto anche a sistema SQUARE superficie. Rod for rigid suspension with cover for driver OTDRC, compatible with ROUND track. Also suitable for SQUARE surface system.




Connettore elettrico lineare
Linear electrical connector

Elemento per la connessione elettrica di due binari ROUND (OTBINCN-OTBINCB). Adatto anche ai sistemi SQUARE. Necessario il giunto meccanico (OTCB-OTCN). Element for electrical connection of two ROUND tracks (OTBINCN-OTBINCB). Also suitable for SQUARE systems. Mechanical joint required (OTCB - OTCN).




Driver e alimentazione Driver and power supply

ROUND superficie surface



Driver attacco magnetico Magnetic attachment driver

Driver magnetico da installare direttamente a binario. Compatibile con serie ROUND 48Vdc - SQUARE 48Vdc.
Magnetic driver to be installed directly on track. Compatible with ROUND 48Vdc - SQUARE 48Vdc series.



nero
black


OTD100

100W
Vin 220-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20



OTD150

150W
Vin 220-240Vac
Vout 48 Vdc
Ampere 3.1 A
IP20




OTD250

250W
Vin 220-240Vac
Vout 48 Vdc
Ampere 5.2 A
IP20



Driver remoto Remote driver

Compatibile con qualsiasi sistema 48Vdc. Articolo necessario per l'opzione di alimentazione con driver remoto, indispensabile il collegamento al modulo di input elettrico (OTMIN-OTMIB). Disponibile cover (OTCVB-OTCVN).
Compatible with any 48Vdc system. Item required for power supply option with remote driver, indispensable connection to electrical input module (OTMIN-OTMIB). Cover available (OTCVB-OTCVN).

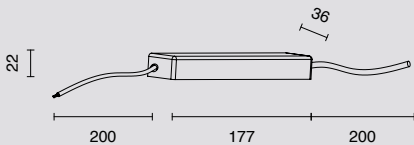


OTDS100

100W
Vin 220-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20




OTDS200

200W
Vin 220-240Vac
Vout 48 Vdc
Ampere 4.2 A
IP20

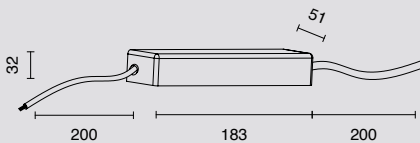

Cover per driver remoto Cover for remote driver

Compatibile con driver OTDS100 e OTDS200.
Compatible with OTDS100 and OTDS200 drivers.




bianco
white

OTCVB




nero
black

OTCVN




Driver remoto per sospensione rigida Remote driver for rigid suspension

Articolo necessario per l'opzione di sospensione rigida e alimentazione in remoto, indispensabile il collegamento al modulo di input elettrico (OTMIN-OTMIB). Disponibile asta con cover (OTPLDB-OTPLDN).
Item needed for rigid suspension and remote power supply option, indispensable connection to electrical input module (OTMIN-OTMIB). Rod with cover available (OTPLDB-OTPLDN).




OTDRC



100W
Vin 100-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20

Modulo di input elettrico Electrical input module

Articolo necessario per l'opzione di alimentazione con driver remoti (OTDS100-OTDS200-OTDRC).
Item required for power supply option with remote drivers (OTDS100-OTDS200-OTDRC).




OTMIB



OTMIN



Schema regolazione cavi Cable adjustable scheme

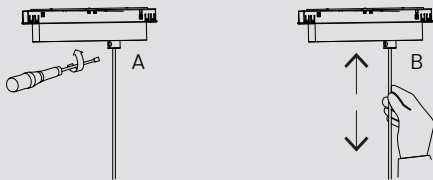

Schema montaggio lente Lens assembly scheme




Slim

Sistema modulare a binario ultrasottile magnetico 48V per installazione a superficie. Provvisto di cover sezionabile. Aggancio a incastro con click.
48Vdc ultrathin magnetic track modular system for surface installation. Equipped with sectionable cover. Interlocking click attachment.



SLIM SLIM

SLIM
Superficie Surface



SLIM SLIM

BINARI MAGNETICI 48V 48V MAGNETIC TRACKS



BINARI MAGNETICI 48V 48V MAGNETIC TRACKS


SLIM SLIM



Binario magnetico 48V 48V magnetic track

Slim

binario a superficie
surface track



SLIM superficie surface

Binario modulare ultrasottile a 48Vdc in alluminio, provvisto di cover polimerica inclusa. Elementi di chiusura finale non inclusi. Barre da 2 m, possibilità di regolarne la lunghezza tramite taglio. Gli accessori per l'alimentazione elettrica e la connessione di più moduli sono necessari e non inclusi. Ultrathin 48Vdc aluminum modular track with polymer cover included. End caps not included. 2 m bar, possibility of adjusting its length by cutting. Accessories for power supply and connection of multiple modules are required and not included.

SLIM SLIM




corpi illuminanti
luminaires
p. 68

accessori
accessories
p. 74

driver e alimentazione
driver and power supply
p. 76

nero
black

OTUSN

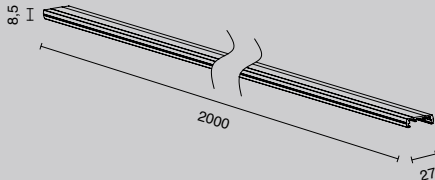


0,5 Kg



0,00045 m³

SLIM

Schema di installazione Installation scheme



Sistema a binario ultrasottile a 48V, in alluminio, provvisto di cover tagliabile inclusa.
48V ultrathin track system, in aluminium, with cuttable cover included.

BINARI MAGNETICI 48V 48V MAGNETIC TRACKS

connessione angolare perpendicolare
perpendicular angle connection
OTUSANV
p. 74

binario ultrasottile con cover
ultrathin track with cover
OTUSN
p. 65

connessione a T
T connection
OTUSTRN
p. 74

spot
spotlight
OTUSS8
OTUSS15
p. 68

elemento finale
final element
OTUSTN
p. 75

ALIMENTAZIONE opzione 1

POWER SUPPLY option 1

driver magnetico
magnetic driver
OTUSD100
OTUSD200
p. 76

connessione lineare
linear connection
OTUSCN
p. 74

ALIMENTAZIONE opzione 2

POWER SUPPLY option 2

driver remoto
remote driver
OTDS100
OTDS200
p. 76

cover per driver
driver cover
OTCVN
p. 76

modulo di input elettrico
electrical input module
OTUSMIN
p. 77

connessione angolare coplanare
coplanar angle connection
OTUSAN
p. 74

corpi illuminanti luminaires



spot
spotlight
p. 68



elemento lineare orientabile
adjustable linear element
p. 69



elemento lineare
linear element
p. 71




elemento beta
beta element
p. 70



sospensione cilindrica
cylindrical suspension
p. 72

Spot Spotlight

compatibile con i seguenti binari
compatible with the following tracks




SLIM superficie surface



Faretto orientabile LED a 48Vdc in alluminio. Diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con sistema SLIM (binario OTUSN). COB Bridgelux. Non dimmerabile. 48Vdc LED adjustable spotlight made of aluminum. Polycarbonate diffuser. Magnetic interlocking attachment. Compatible with SLIM system (OTUSN track). Bridgelux COB. Non-dimmable.

sorgente luminosa
light source
LED

power: **8W**
voltage: **48Vdc**
light temperature: **3000K**
lumens: **610LM**




0,23 Kg 0,0018 m³

nero
black

OTUSS8



power: **15W**
voltage: **48Vdc**
light temperature: **3000K**
lumens: **1180LM**



0,31 Kg 0,0027 m³


nero
black

OTUSS15



Elemento lineare orientabile Adjustable linear element

compatibile con i seguenti binari
compatible with the following tracks




SLIM superficie surface



Elemento lineare LED 48Vdc, orientabile. Struttura in alluminio, diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con sistema SLIM (binario OTUSN). LED Bridgelux. Non dimmerabile. 48Vdc adjustable LED linear element. Aluminium structure, polycarbonate diffuser. Magnetic interlocking attachment. Compatible with SLIM system (OTUSN track). Bridgelux LED. Non-dimmable.

sorgente luminosa
light source
LED

power: **12W**
voltage: **48Vdc**
light temperature: **3000K**
lumens: **936LM**



0,35 Kg 0,00064 m³

nero
black

OTUSLIRN



Elemento beta Beta element

compatibile con i seguenti binari
compatible with the following tracks



SLIM superficie surface

Elemento lineare LED con lenti antiabbaglio, 48Vdc. Struttura in alluminio, diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con sistema SLIM (binario OTUSN). LED Osram. Non dimmerabile. LED linear element with anti-glare lens, 48Vdc. Aluminium structure, polycarbonate diffuser. Magnetic interlocking attachment. Compatible with SLIM system (OTUSN track). Osram LED. Non-dimmable.

sorgente luminosa
light source
LED

24°


30.000

IP20

UGR <19

CRI >90

power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 1006LM



0,22 Kg



0,0002 m³

nero
black

OTUSFA12N



power: 18W
voltage: 48Vdc
light temperature: 3000K
lumens: 1509LM



0,29 Kg




0,0003 m³

nero
black

OTUSFA18N



power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 2012LM



0,35 Kg



0,0004 m³

nero
black

OTUSFA24N



Elemento lineare Linear element

compatibile con i seguenti binari
compatible with the following tracks



SLIM superficie surface

Elemento lineare LED 48Vdc. Struttura in alluminio, diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con sistema SLIM (binario OTUSN). LED Osram. Non dimmerabile. 48Vdc LED linear element. Aluminium structure, polycarbonate diffuser. Magnetic interlocking attachment. Compatible with SLIM system (OTUSN track). Osram LED. Non-dimmable.

sorgente luminosa
light source
LED

100°


30.000

IP20

UGR <19

CRI >90

power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 936LM



0,22 Kg




0,0002 m³

nero
black

OTUSLI12N



power: 18W
voltage: 48Vdc
light temperature: 3000K
lumens: 1404LM



0,29 Kg




0,0003 m³

nero
black

OTUSLI18N



power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 1872LM



0,35 Kg



0,0004 m³

nero
black


OTUSLI24N






Sospensione cilindrica Cylindrical suspension

compatibile con i seguenti binari
compatible with the following tracks




SLIM superficie surface



Sospensione cilindrica a LED 48Vdc.
Struttura in alluminio, diffusore in polycarbonato. Disponibile ottica (OTLENS) per ottenere angolo di emissione luminosa di 38°. Cavi regolabili in lunghezza.
Attacco ad incastro magnetico. Compatibile con sistema SLIM (binario OTUSN). COB Bridgelux. Non dimmerabile.

48Vdc LED cylindrical suspension.
Aluminium structure, polycarbonate diffuser. Available lens (OTLENS) to obtain a beam angle of 38°. Cables adjustable in length.
Magnetic interlocking attachment. Compatible with SLIM system (OTUSN track). Bridgelux COB. Non-dimmable.

Ottica opzionale in materiale plastico compatibile con sospensione cilindrica. Per ottenere un'apertura del fascio luminoso pari a 38°. Optional plastic lens, compatible with cylindrical suspension, to obtain a beam angle of 38°.



OTLENS


SLIM SLIM

sorgente luminosa
light source

Regolazione cavi e montaggio lente a pag. 77
Cable adjustment and lens assembly p. 77

LED

power: 6W
voltage: 48Vdc
light temperature: 3000K
lumens: 468LM

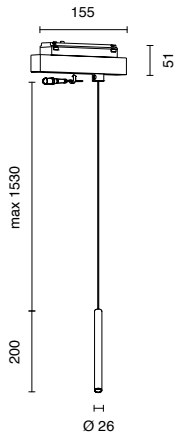


0,33 Kg 0,00014 m³

nero
black

OTUSTPN



power: 6W
voltage: 48Vdc
light temperature: 3000K
lumens: 468LM

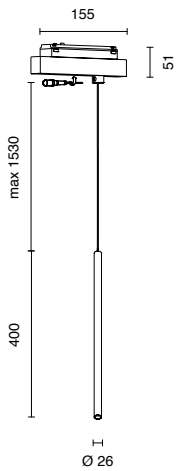

0,54 Kg 0,00028 m³

nero
black

OTUSTGN



Accessori Accessories


SLIM superficie surface



Binario ultrasottile con cover

Ultrathin track with cover

Binario modulare ultrasottile a 48Vdc in alluminio tagliabile, provvisto di cover polimerica inclusa. Gli accessori per l'alimentazione elettrica e la connessione di più moduli sono necessari e non inclusi. 48Vdc ultrathin modular track made of cuttable aluminium with polymer cover included. Accessories for power supply and connection of multiple modules are required and not included.

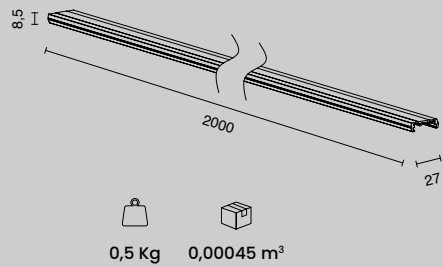


0,5 Kg 0,00045 m³

nero
black

OTUSN


Lunghezza 2000 mm
Lenght 2000 mm

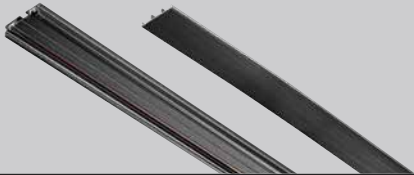

Connessione lineare

Linear connection

Connessione elettro-meccanica per il collegamento lineare di due binari SLIM (OTUSN). Electro-mechanical connector for linear connection of two SLIM tracks (OTUSN).




OTUSCN



Connessione angolare complanare

Coplanar angle connection

Connessione elettro meccanica per il collegamento angolare complanare di due binari SLIM (OTUSN). Electro-mechanical connector for coplanar angle connection of two SLIM tracks (OTUSN).




OTUSAN



Connessione angolare perpendicolare

Perpendicular angle connection

Connessione elettro-meccanica per il collegamento di due binari SLIM (OTUSN) su superfici perpendicolari tra loro. Electro-mechanical connection for connecting two SLIM (OTUSN) tracks on surfaces perpendicular to each other.

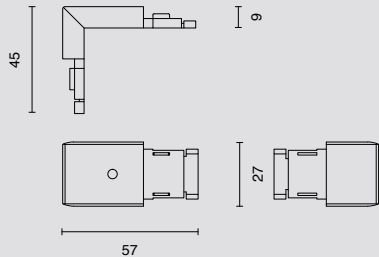


OTUSANV



Connessione angolare T

T angle connection

Connessione elettro-meccanica per il collegamento di tre binari SLIM (OTUSN). Electro-mechanical connector for connection of three SLIM tracks (OTUSN).




OTUSTRN



Elemento finale


Final element

Elemento di chiusura finale per binari SLIM (OTUSN). End cap for SLIM tracks (OTUSN).




nero
black

OTUSTN




Driver e alimentazione Driver and power supply

SLIM superficie surface



Driver attacco magnetico Magnetic attachment driver

Driver magnetico da installare direttamente a binario.
Compatible con serie Slim 48Vdc.
Magnetic driver to be installed directly on track. Compatible with Slim 48Vdc series.



nero
black



OTUSD100

100W
Vin 220-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20




OTUSD200

200W
Vin 220-240Vac
Vout 48 Vdc
Ampere 4.2 A
IP20



Driver remoto Remote driver

Compatibile con qualsiasi sistema 48Vdc. Articolo necessario per l'opzione di alimentazione con driver remoto, indispensabile il collegamento al modulo di input elettrico (OTUSMIN).
Compatible with any 48Vdc system. Item required for power supply option with remote driver, indispensable connection to the electrical input module (OTUSMIN).




OTDS100

100W
Vin 220-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20




OTDS200

200W
Vin 220-240Vac
Vout 48 Vdc
Ampere 4.2 A
IP20

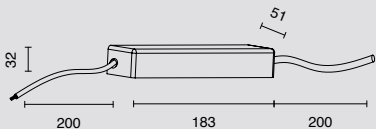

Cover per driver remoto Cover for remote driver

Compatibile con driver OTDS100 e OTDS200.
Compatible with OTDS100 and OTDS200 drivers.




OTCVN



Modulo di input elettrico Electrical input module

Articolo necessario per l'opzione di alimentazione con driver remoti (OTDS100-OTDS200).
Item required for power supply option with remote drivers (OTDS100-OTDS200).




nero
black


OTUSMIN



Schema regolazione cavi Cable adjustable scheme

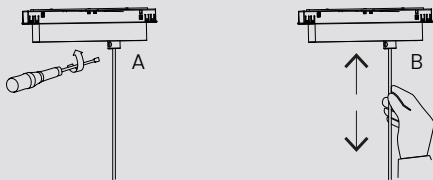

Schema montaggio lente Lens assembly scheme



Square

Sistema modulare a binario magnetico 48V con sezione rettangolare.
Disponibile nella versione a superficie e ad incasso. Installazione a sospensione realizzabile con appositi KIT. Aggancio a incastro magnetico.
48V magnetic track modular system with rectangular section. Available in surface and recessed versions. Suspension installation achievable with specific KITS.
Magnetic interlocking attachment.




SQUARE
Incasso Recessed



BINARI MAGNETICI 48V 48V MAGNETIC TRACKS

SQUARE INCASSO SQUARE RECESSED

SQUARE
Incasso Recessed / Superficie Surface




BINARI MAGNETICI 48V 48V MAGNETIC TRACKS



SQUARE INCASSO E SUPERFICIE SQUARE RECESSED AND SURFACE

Binario magnetico 48V 48V magnetic track

binario incasso
recessed track



SQUARE incasso recessed

Square incasso Square recessed

Binario modulare in alluminio a sezione rettangolare, 48Vdc. Versione per l'installazione ad incasso.

Barre da 2m, possibilità di regolarne la lunghezza tramite taglio. Elementi di chiusura finale non inclusi.

Gli accessori per l'alimentazione elettrica e la connessione di più moduli sono necessari e non inclusi. Disponibili connessioni sia lineari che curve.

Aluminium modular track with rectangular section, 48Vdc.

Version for recessed installation. 2m bar, possibility of adjusting its length by cutting. End caps not included.

Accessories for power supply and connection of multiple modules are required and not included.

Both linear and curved connections available.



corpi illuminanti
luminaires
p. 96

accessori
accessories
p. 112


driver e alimentazione
driver and power supply
p. 118

bianco
white

nero
black

OTBINIB

OTBININ

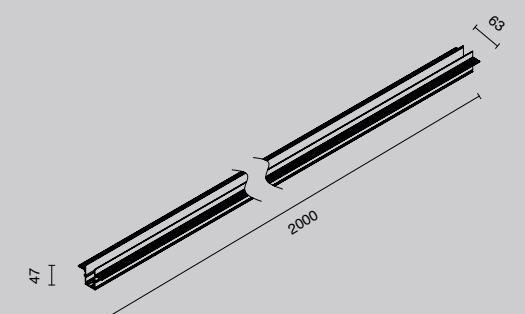

1,77 Kg




0,0057 m³

SQUARE incasso connessioni lineari


SQUARE recessed linear connections

Schema di installazione Installation scheme



Sistema modulare a binario magnetico 48V con sezione rettangolare. Rappresentazione del montaggio a connessioni lineari. Versione ad incasso. Aggancio a incastro magnetico.

48V magnetic track modular system with rectangular section. Representation of linear connection mounting. Recessed version. Magnetic interlocking attachment.

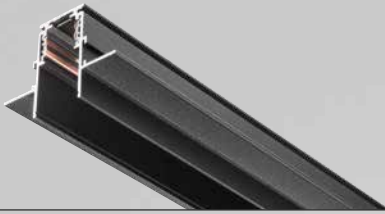

ALIMENTAZIONE opzione 1 POWER SUPPLY option 1



driver magnetico
magnetic driver

OTD100
OTD150
OTD250
p. 118

ALIMENTAZIONE opzione 2 POWER SUPPLY option 2

driver remoto
remote driver

OTDS100
OTDS200
p. 118



modulo di input elettrico
electrical input module

OTMIB
OTMIN
p. 119



connettore elettrico angolare
angle electrical connector

OTCNDB
OTCNDN
p. 117

spot
spotlight

OTSP7B
OTSP7G
OTSP7N
p. 96

OTSP15B
OTSP15G
OTSP15N
p. 96

connessione meccanica angolare perpendicolare
perpendicular angle mechanical connection

OTANVIB
OTANVIN
p. 113

binario ad incasso
recessed track

OTBINIB
OTBININ
p. 85

chiusura finale per incasso
end cap for recessed

OTTIB
OTTIN
p. 113

connettore elettrico lineare
linear electrical connector

OTCNB
OTCNN
p. 117

giunto meccanico
mechanical joint

OTCI
p. 112

connessione meccanica angolare coplanare
coplanar angle mechanical connection

OTANIB
OTANIN
p. 113

connettore elettrico angolare
angle electrical connector

OTCNDB
OTCNDN
p. 117

connessione meccanica a T
mechanical T connection

OTTRIB
OTTRIN
p. 112

connettore elettrico a T
electrical T connector

OTCNTB
OTCNTN
p. 117

corpi illuminanti luminaires



elemento angolare coplanare
coplanar angle element

p. 107



elemento angolare perpendicolare
perpendicular angle element

p. 107



spot
spotlight

p. 96



sfera LED
LED sphere

p. 98



elemento a luce diffusa
diffuse light element

p. 105



elemento lineare
linear element

p. 100




elemento beta
beta element

p. 102



elemento beta orientabile
adjustable beta element

p. 104



sospensione cilindrica
cylindrical suspension

p. 109



sospensione sfera
sphere suspension

p. 110



sospensione goccia
drop suspension

p. 110

Compatibili con i sistemi SQUARE e ROUND / Compatible with SQUARE and ROUND systems

SQUARE incasso connessioni curve

SQUARE recessed curved connections

Schema di installazione Installation scheme



Sistema modulare a binario magnetico 48V con sezione rettangolare. Rappresentazione del montaggio a connessioni curve. Versione ad incasso. Aggancio a incastro magnetico.

48V magnetic track modular system with rectangular section. Representation of curved connection mounting. Recessed version. Magnetic interlocking attachment.

BINARI MAGNETICI 48V 48V MAGNETIC TRACKS

ALIMENTAZIONE opzione 1
POWER SUPPLY option 1

driver magnetico
magnetic driver

OTD100
OTD150
OTD250
p. 118

connettore elettrico curvo
curved electrical connector

OTCNDCN
p. 117

giunto meccanico
mechanical joint

OTCI
p. 112

connettore elettrico curvo
curved electrical connector

OTCNDCN
p. 117

giunto meccanico
mechanical joint

OTCI
p. 112

chiusura finale per incasso
end cap for recessed

OTTIB
OTTIN
p. 113

connessione curva ad U da incasso
recessed U curved connection

OTCUIN
p. 112

spot con attacco curvo
spotlight with curved attachment

OTSPC7G
OTSPC7N
p. 97

connessione curva a C da incasso
recessed C curved connection

OTCR30IN
p. 112

ALIMENTAZIONE opzione 2
POWER SUPPLY option 2

driver remoto
remote driver

OTDS100
OTDS200
p. 118

modulo di input elettrico
electrical input module

OTMIB
OTMIN
p. 119

binario ad incasso
recessed track

OTBINIB
OTBININ
p. 85

chiusura finale per incasso
end cap for recessed

OTTIB
OTTIN
p. 113

corpi illuminanti luminaires

spot con attacco curvo
spotlight with curved attachment

p. 97

sfera LED con attacco curvo
LED sphere with curved attachment

p. 99

elemento lineare curvo
curved linear element

p. 101

elemento beta curvo
curved beta element


p. 103

Adatti per connessioni curve e sistema RING / Suitable for curved connections and RING system

SQUARE INCASSO SQUARE RECESSED

Binario magnetico 48V 48V magnetic track

binario a superficie
surface track



SQUARE superficie surface

Square superficie

Square surface

Binario modulare in alluminio a sezione rettangolare, 48Vdc. Versione per l'installazione superficie. Kit per sospensioni disponibili, acquistabili separatamente. Barre da 2m, possibilità di regolare la lunghezza tramite taglio. Elementi di chiusura finale non inclusi. Gli accessori per l'alimentazione elettrica e la connessione di più moduli sono necessari e non inclusi. Disponibili connessioni sia lineari che curve. Aluminium modular track with rectangular section, 48Vdc. Version for surface installation. Suspension kits available, purchased separately. 2m bar, possibility of adjusting its length by cutting. End caps not included. Accessories for power supply and connection of multiple modules are required and not included. Both linear and curved connections available.

corpi illuminanti
luminaires
p. 96

accessori
accessories
p. 114

driver e alimentazione
driver and power supply
p. 118

bianco
white

OTBINSB

oro
gold


OTBINSG

nero
black

OTBINSN

1,57 Kg


0,0027 m³

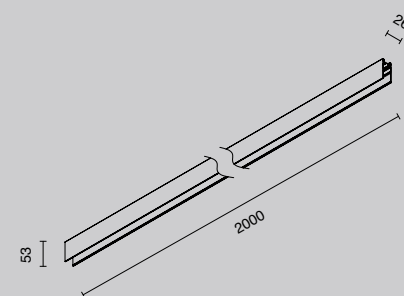

SQUARE superficie connessioni lineari

SQUARE surface linear connections

Schema di installazione Installation scheme



Sistema modulare a binario magnetico 48V con sezione rettangolare. Rappresentazione del montaggio con connessioni lineari. Versione a superficie. Installazione a sospensione realizzabile con appositi KIT. Aggancio a incastro magnetico.

48V magnetic track modular system with rectangular section. Representation of linear connection mounting. Surface version. Suspension installation achievable with specific KITS. Magnetic interlocking attachment.

ALIMENTAZIONE opzione 1
POWER SUPPLY option 1

driver remoto per sospensione rigida
remote driver for rigid suspension

OTDRC
p. 119

asta per sospensione rigida con cover per driver
rod for rigid suspension with driver cover

OTPLDB
OTPLDN
p. 115

modulo di input elettrico
electrical input module

OTMIB
OTMIN
p. 119

ALIMENTAZIONE opzione 2
POWER SUPPLY option 2

driver remoto
remote driver

OTDS100
OTDS200
p. 118

cover per driver remoto
remote driver cover

OTCVB
OTCVG
OTCVN
p. 119

modulo di input elettrico
electrical input module

OTMIB
OTMIN
p. 119

ALIMENTAZIONE opzione 3
POWER SUPPLY option 3

driver magnetico
magnetic driver

OTD100
OTD150
OTD250
p. 118

corpi illuminanti luminaires

elemento angolare coplanare angle element	elemento angolare perpendicolare perpendicular angle element	spot spotlight	sfera LED LED sphere	elemento a luce diffusa diffuse light element	elemento lineare linear element	elemento beta beta element	elemento beta orientabile adjustable beta element	sospensione cilindrica cylindrical suspension	sospensione sfera sphere suspension	sospensione goccia drop suspension
p. 107	p. 107	p. 96	p. 98	p. 105	p. 100	p. 102	p. 104	p. 109	p. 110	p. 110

Compatibili con i sistemi SQUARE e ROUND / Compatible with SQUARE and ROUND systems



connettore elettrico angolare
angle electrical connector

OTCNDB
OTCNDN
p. 117

connettore elettrico angolare
angle electrical connector

OTCNDB
OTCNDN
p. 117

connessione ad angolo coplanare
coplanar angle connection

OTANSB
OTANSB
OTANSN
p. 115

connessione ad angolo perpendicolare
perpendicular angle connection

OTANVSB
OTANVSG
OTANVSN
p. 115

binario a superficie
surface track

OTBINSB
OTBINSB
OTBINSN
p. 91

spot spotlight

OTSP7B
OTSP7G
OTSP7N
p. 96

giunto meccanico
mechanical joint

OTCSB
OTCSG
OTCSN
p. 114

connettore elettrico lineare
linear electrical connector

OTCNB
OTCNN
p. 117

connessione meccanica a T
mechanical T connection

OTTRSB
OTTRSN
OTTRSG
p. 114

connettore elettrico a T
electrical T connector

OTCNTB
OTCNTN
p. 117

SOSPENSIONE opzione 1 SUSPENSION option 1

kit sospensione con cavetti
suspension kit with cables

OTKITS
p. 115

chiusura finale per superficie
end cap for surface

OTTSB
OTTSG
OTTSN
p. 115

SOSPENSIONE opzione 2 SUSPENSION option 2

asta per sospensione rigida
rod for rigid suspension

OTPLB
OTPLN
p. 115

chiusura finale per superficie
end cap for surface


OTTSB
OTTSG
OTTSN
p. 115

SQUARE SUPERFICIE SQUARE SURFACE

SQUARE superficie connessioni curve

SQUARE surface curved connections

Schema di installazione Installation scheme



Sistema modulare a binario magnetico 48V con sezione rettangolare. Rappresentazione del montaggio a connessioni curve. Versione a superficie. Installazione a sospensione realizzabile con appositi KIT. Aggancio a incastro magnetico.

48V magnetic track modular system with rectangular section. Representation of curved connection mounting. Surface version. Suspension installation achievable with specific KITS. Magnetic interlocking attachment.

ALIMENTAZIONE opzione 1

POWER SUPPLY option 1

driver per sospensione rigida
driver for rigid suspension

OTDRC
p. 119

asta per sospensione rigida con cover per driver
rod for rigid suspension with driver cover

OTPLDB
OTPLDN
p. 115

modulo di input elettrico
electrical input module

OTMIB
OTMIN
p. 119

ALIMENTAZIONE opzione 2

POWER SUPPLY option 2

driver remoto
remote driver

OTDS100
OTDS200
p. 118

cover per driver
driver cover

OTCVB
OTCVG
OTCVN
p. 119

modulo di input elettrico
electrical input module

OTMIB
OTMIN
p. 119

ALIMENTAZIONE opzione 3

POWER SUPPLY option 3

driver magnetico
magnetic driver

OTD100
OTD150
OTD250
p. 118

corpi illuminanti luminaires

spot con attacco curvo
spotlight with curved attachment

p. 97

sfera LED con attacco curvo
LED sphere with curved attachment

p. 99

elemento lineare curvo
curved linear element

p. 101

elemento beta curvo
curved beta element

p. 103

Adatti per raccordi curvi e sistema RING / Suitable for curved fittings and RING system

connettore elettrico curvo
curved electrical connector

OTCNDCN
p. 117

binario a superficie
surface track

OTBINSB
OTBINSG
OTBINSN
p. 91

giunto meccanico
mechanical joint

OTCSB
OTCSG
OTCSN
p. 114

connessione curva a U a superficie
surface U curved connection

OTCUSG
OTCUSN
p. 114

giunto meccanico
mechanical joint

OTCSB
OTCSG
OTCSN
p. 114

connessione curva a C a superficie
surface C curved connection

OTCR30SG
OTCR30SN
p. 114

spot con attacco curvo
spotlight with curved attachment

OTSPC7G
OTSPC7N
p. 97

chiusura finale per superficie
end cap for surface

OTTSB
OTTSB
OTTSN
p. 115

SOSPENSIONE opzione 1

SUSPENSION option 1

kit sospensione con cavetti
suspension kit with cables

OTKITS
p. 115

SOSPENSIONE opzione 2



SUSPENSION option 2

asta per sospensione rigida
rod for rigid suspension

OTPLB
OTPLN
p. 115


Spot Spotlight

compatibile con i seguenti binari
compatible with the following tracks

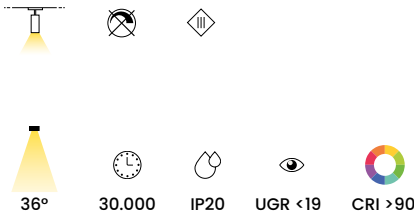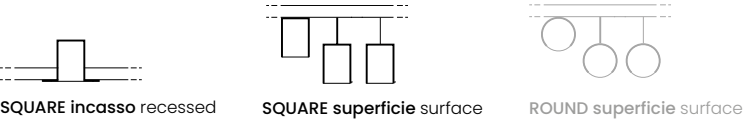

sorgente luminosa
light source
LED


power: 7W
voltage: 48Vdc
light temperature: 3000K
lumens: 546LM



0,20 Kg 0,00014 m³



power: 15W
voltage: 48Vdc
light temperature: 3000K
lumens: 1170LM





0,35 Kg 0,00034 m³



Spot con attacco curvo Spotlight with curved attachment

compatibile con i seguenti binari
compatible with the following tracks

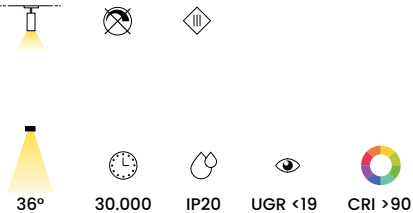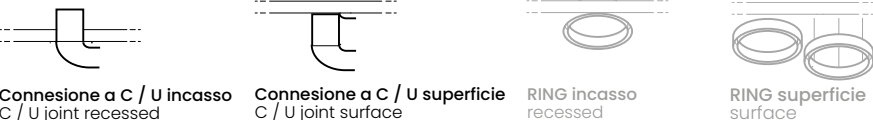


Connessioni a C e ad U incasso
C and U joints recessed
pag. 112

Connessioni a C e ad U a superficie
C and U joints surface
pag. 114


Sistema Ring incasso /superficie
Ring recessed/surface system
pag. 120

sorgente luminosa
light source
LED

power: 7W
voltage: 48Vdc
light temperature: 3000K
lumens: 546LM





0,20 Kg 0,00014 m³

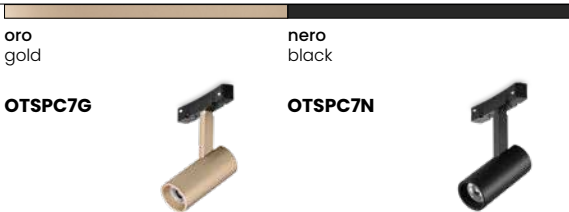


Sfera LED LED sphere

compatibile con i seguenti binari
compatible with the following tracks

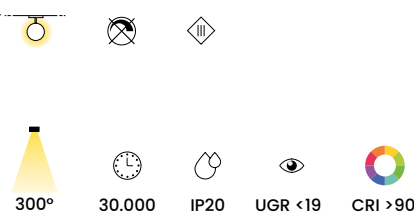

sorgente luminosa
light source
LED

power: 8W
voltage: 48Vdc
light temperature: 3000K
lumens: 624LM



bianco
white

OTPBB



oro
gold

OTPBG



nero
black




OTPBK



0,41 Kg 0,003 m³

Sfera LED con attacco curvo LED sphere with curved attachment

compatibile con i seguenti binari
compatible with the following tracks

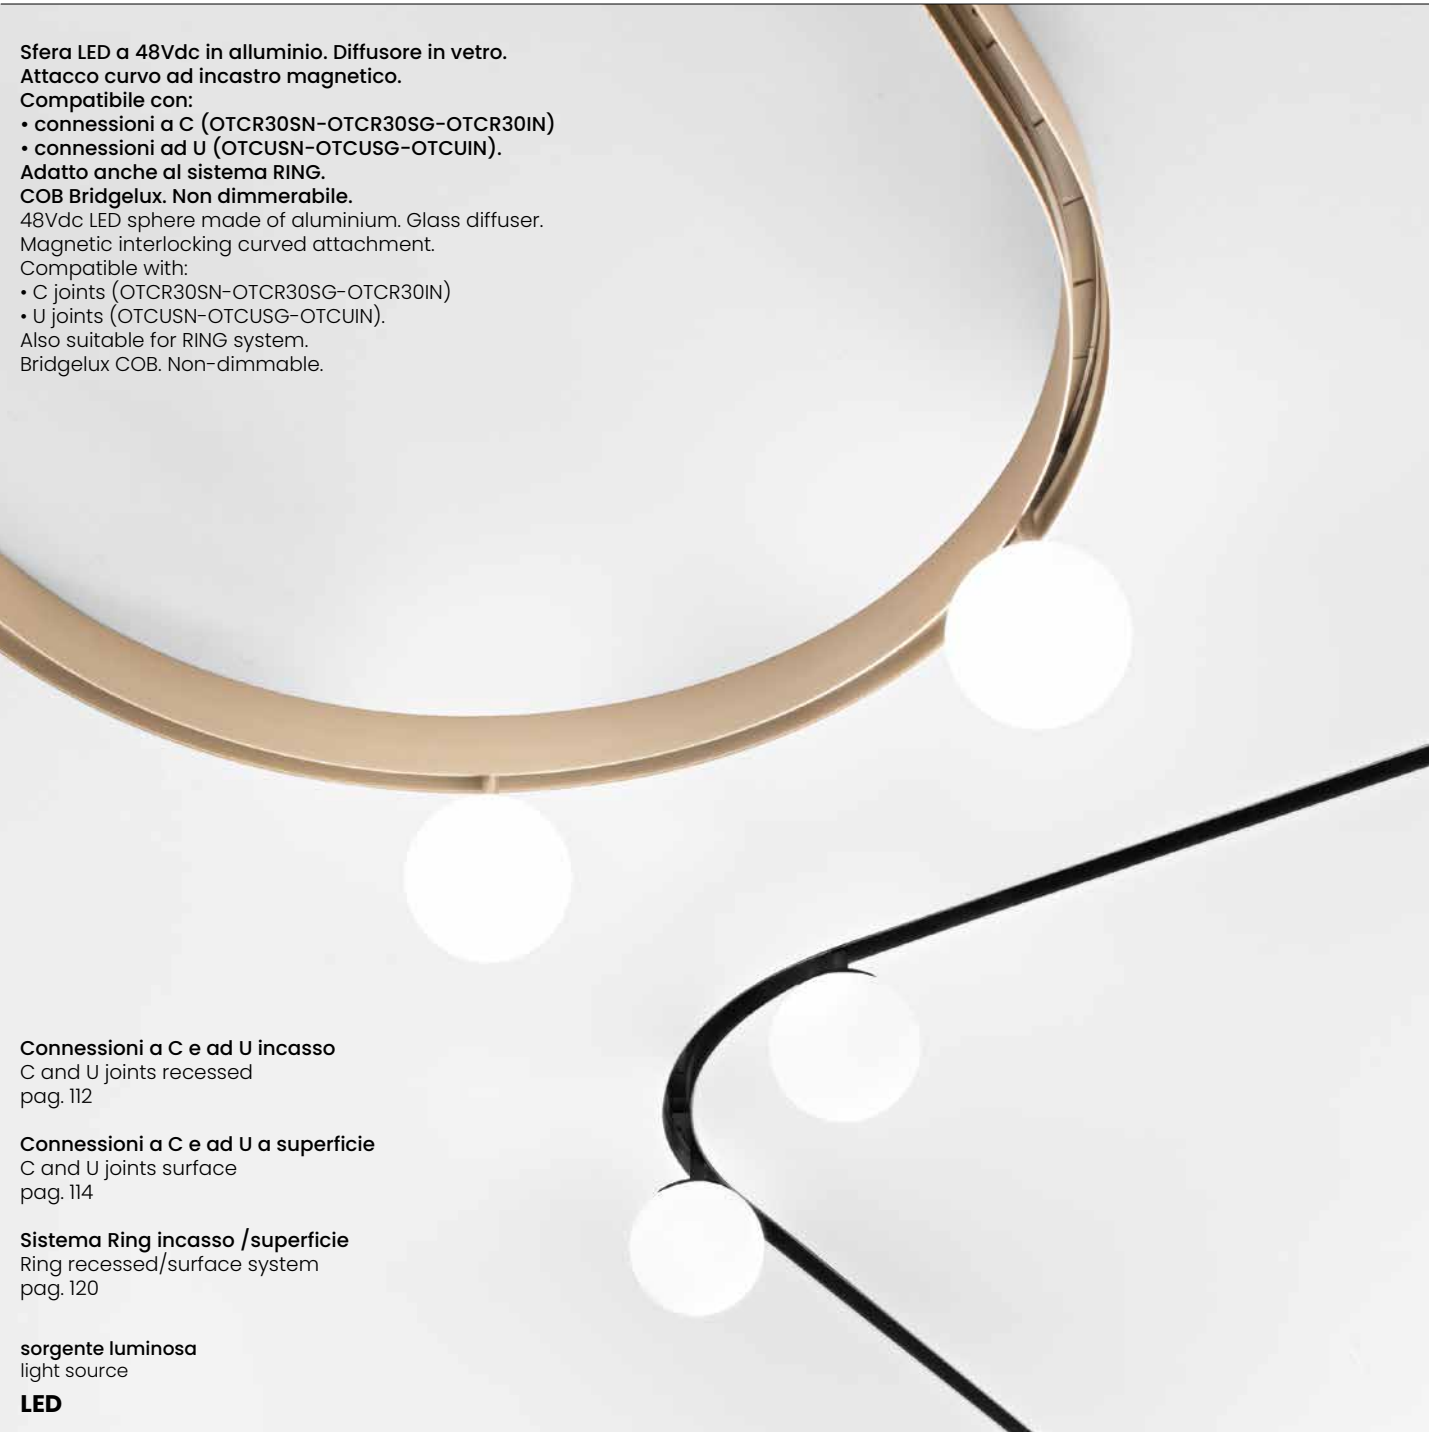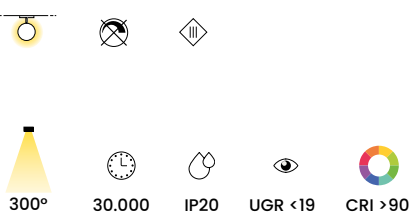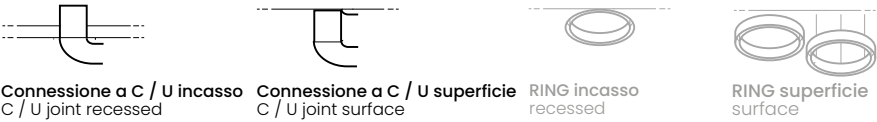


Connessioni a C e ad U incasso
C and U joints recessed
pag. 112

Connessioni a C e ad U a superficie
C and U joints surface
pag. 114

Sistema Ring incasso /superficie
Ring recessed/surface system
pag. 120

sorgente luminosa
light source
LED

power: 8W
voltage: 48Vdc
light temperature: 3000K
lumens: 624LM



oro
gold

OTPBKG



nero
black



OTPBKN



0,48 Kg 0,0022 m³

Elemento lineare Linear element

compatibile con i seguenti binari
compatible with the following tracks

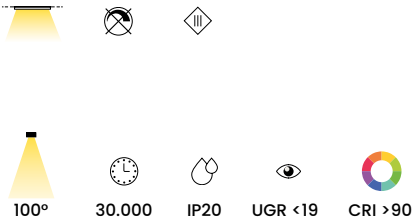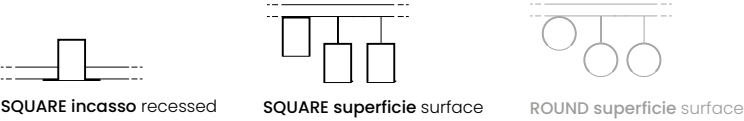

power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 936LM

0,20 Kg 0,00029 m³

bianco white	nero black
OTLI12B	OTLI12N

power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 1872LM

0,39 Kg 0,00058 m³

bianco white	nero black
OTLI24B	OTLI24N

power: 36W
voltage: 48Vdc
light temperature: 3000K
lumens: 2808LM

0,53 Kg 0,00087 m³

bianco white	nero black
OTLI36B	OTLI36N

Elemento lineare curvo Curved linear element

compatibile con i seguenti binari
compatible with the following tracks





power: 9W
voltage: 48Vdc
light temperature: 3000K
lumens: 702LM

0,14 Kg 0,00016 m³

nero black
OTLC80N

Elemento beta Beta element

compatibile con i seguenti binari
compatible with the following tracks

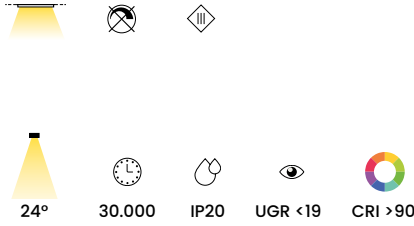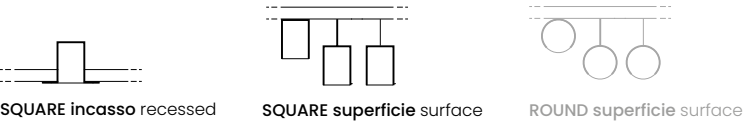

power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 1006LM

bianco
white

OTFA12B

nero
black

OTFA12N

0,17 Kg 0,0002 m³

power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 2012LM

bianco
white

OTFA24B

nero
black

OTFA24N

0,31 Kg 0,00041 m³

power: 36W
voltage: 48Vdc
light temperature: 3000K
lumens: 3018LM

bianco
white

OTFA36B



nero
black

OTFA36N

0,43 Kg 0,00062 m³

Elemento beta curvo Curved beta element

compatibile con i seguenti binari
compatible with the following tracks

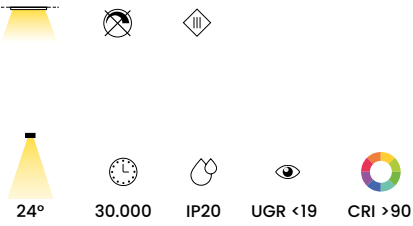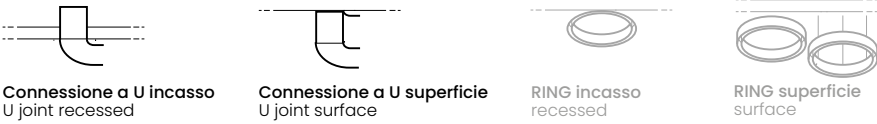

power: 9W
voltage: 48Vdc
light temperature: 3000K
lumens: 720LM

nero
black

OTFAC80N



0,14 Kg 0,00016 m³

BINARI MAGNETICI 48V 48V MAGNETIC TRACKS


SQUARE INCASSO E SUPERFICIE SQUARE RECESSED AND SURFACE

Elemento beta orientabile Adjustable beta element

compatibile con i seguenti binari
compatible with the following tracks

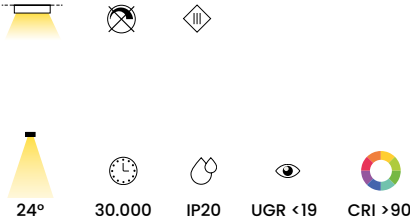

power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 1006LM



0,31 Kg 0,00059 m³


bianco
white
OTFAR12B



nero
black
OTFAR12N



power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 2012LM



0,58 Kg 0,0011 m³


bianco
white
OTFAR24B



nero
black
OTFAR24N



power: 36W
voltage: 48Vdc
light temperature: 3000K
lumens: 3018LM

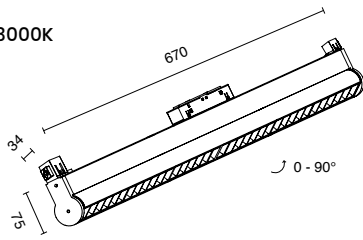

0,83 Kg 0,0016 m³

bianco
white
OTFAR36B





nero
black
OTFAR36N




Elemento a luce diffusa Diffuse light element

compatibile con i seguenti binari
compatible with the following tracks

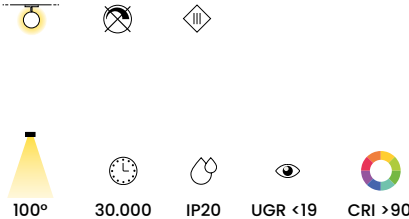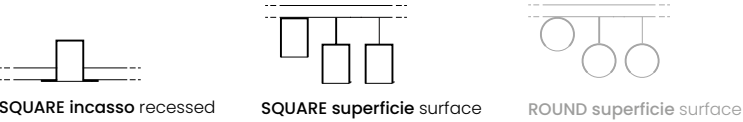

sorgente luminosa
light source
LED

power: 12W
voltage: 48Vdc
light temperature: 3000K
lumens: 936LM



0,41 Kg 0,00027 m³

bianco
white
OTPRB





nero
black
OTPRN





Elemento angolare complanare Coplanar angle element

compatibile con i seguenti binari
compatible with the following tracks

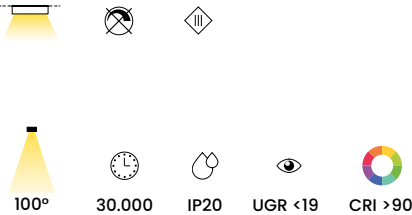

Elemento angolare a 48Vdc in alluminio. Diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con connessioni angolari complanari SQUARE ad incasso(OTANIN-OTANIB), connessioni angolari complanari SQUARE a superficie (OTANSN-OTANSB-OTANSNG). LED Bridgelux. Non dimmerabile.

48Vdc coplanar angle element made of aluminium. Polycarbonate diffuser. Magnetic interlocking attachment. Compatible with SQUARE recessed coplanar angle connections (OTANIN-OTANIB) and SQUARE surface coplanar angle connections (OTANSN- OTANSB-OTANSNG). Bridgelux LED. Non-dimmable.


sorgente luminosa
light source
LED
power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 1872LM

connessioni ad angolo complanare
a incasso / recessed coplanar angle
connections
pag. 113

connessioni ad angolo complanare
a superficie / surface coplanar angle
connections
pag. 115



bianco
white
OTLAOB

nero
black
OTLAON

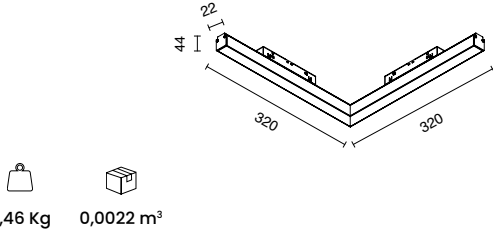

Elemento angolare perpendicolare Perpendicular angle element

compatibile con i seguenti binari
compatible with the following tracks

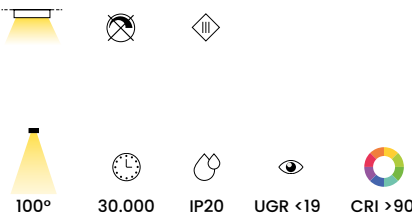

Elemento angolare a 48Vdc in alluminio. Diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con connessioni angolari perpendicolari SQUARE ad incasso (OTANVIN-OTANVIB), connessioni angolari perpendicolari SQUARE a superficie (OTANVSN- OTANVSB-OTANVSG). LED Bridgelux. Non dimmerabile.

48Vdc perpendicular angle element made of aluminium. Polycarbonate diffuser. Magnetic interlocking attachment. Compatible with SQUARE recessed perpendicular angle connections (OTANVIN-OTANVIB) and SQUARE surface perpendicular angle connections (OTANVSN- OTANVSB-OTANVSG). Bridgelux LED. Non-dimmable.


sorgente luminosa
light source
LED
power: 24W
voltage: 48Vdc
light temperature: 3000K
lumens: 1872LM

connessioni ad angolo perpendicolare
a incasso / recessed perpendicular angle
connections
pag. 113

connessioni ad angolo perpendicolare
a superficie / surface perpendicular angle
connections
pag. 115

bianco
white
OTLAVB



nero
black
OTLAVN

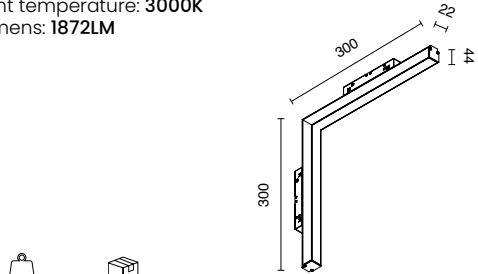



Sospensione cilindrica Cylindrical suspension


compatibile con i seguenti binari
compatible with the following tracks

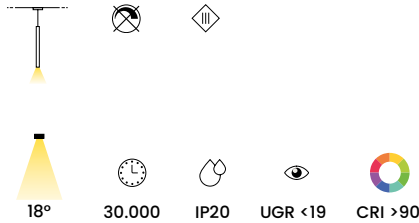

Elemento cilindrico LED a 48Vdc in alluminio. Diffusore in policarbonato. Disponibile ottica (OTLENS) per ottenere angolo di emissione luminosa di 38°. Attacco ad incastro magnetico. Compatibile con sistema SQUARE ad incasso (OTBININ-OTBINIB), SQUARE a superficie (OTBINSN-OTBINSB-OTBINSG). Adatto anche al sistema ROUND. Cavetti regolabili. COB Bridgelux. Non dimmerabile.

48Vdc LED cylindrical element made of aluminium. Polycarbonate diffuser. Available lens (OTLENS) to obtain a beam angle of 38°. Magnetic interlocking attachment. Compatible with SQUARE recessed(OTBININ-OTBINIB) and SQUARE surface (OTBINSN-OTBINSB-OTBINSG) systems. Also suitable for ROUND system. Adjustable cables. Bridgelux COB. Non-dimmable.


Ottica opzionale in materiale plastico compatibile con sospensione cilindrica. Per ottenere un'apertura del fascio luminoso pari a 38°. Optional plastic lens, compatible with cylindrical suspension, to obtain a beam angle of 38°.

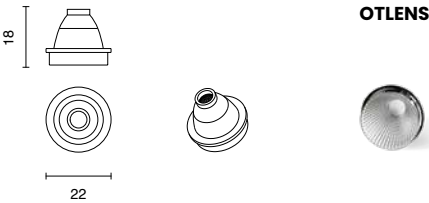

sorgente luminosa
light source
LED


Regolazione cavi e montaggio
lente a pag. 119
Cable adjustment and lens
assembly p. 119

power: 6W
voltage: 48Vdc
light temperature: 3000K
lumens: 468LM

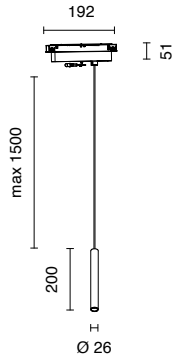

0,33 Kg 0,00014 m³

power: 6W
voltage: 48Vdc
light temperature: 3000K
lumens: 468LM

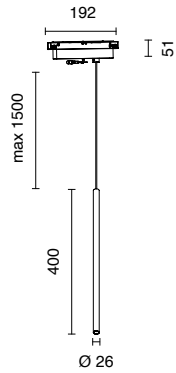


0,54 Kg 0,00028 m³



Sospensione a goccia Drop suspension

compatibile con i seguenti binari
compatible with the following tracks

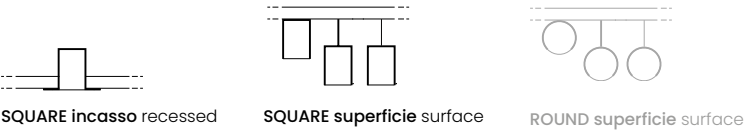

Elemento LED a goccia a sospensione a 48Vdc in alluminio. Diffusore in policarbonato. Attacco ad incastro magnetico. Compatibile con sistema SQUARE ad incasso (OTBININ-OTBINIB), SQUARE a superficie (OTBINSN-OTBINSB-OTBINSG). Adatto anche al sistema ROUND. Cavetti regolabili. COB Bridgelux. Non dimmerabile.



sorgente luminosa
light source

LED

power: 4W
voltage: 48Vdc
light temperature: 3000K
lumens: 312LM

0,24 Kg
0,00014 m³


48Vdc drop LED suspension element made of aluminium. Polycarbonate diffuser. Magnetic interlocking attachment. Compatible with SQUARE recessed(OTBININ-OTBINIB) and SQUARE surface (OTBINSN-OTBINSB-OTBINSG) systems. Also suitable for ROUND system. Adjustable cables. Bridgelux COB. Non-dimmable.

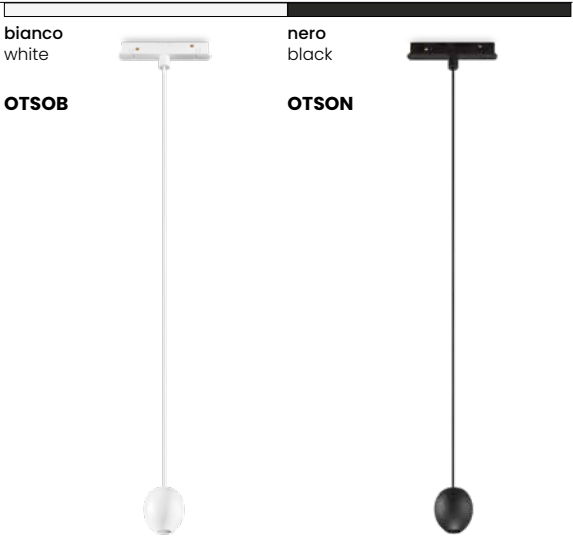

Regolazione cavi a pag. 119 / Cable adjustment p. 119



Sospensione a sfera Sphere suspension

compatibile con i seguenti binari
compatible with the following tracks

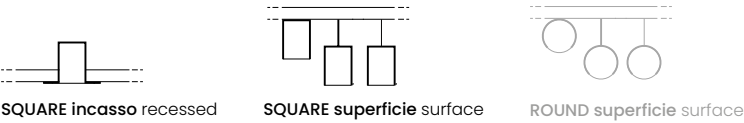

Elemento a sospensione a 48Vdc in alluminio. Diffusore in vetro. Attacco ad incastro magnetico. Compatibile con sistema SQUARE ad incasso (OTBININ-OTBINIB), SQUARE a superficie (OTBINSN-OTBINSB-OTBINSG). Adatto anche al sistema ROUND. Cavetti regolabili. COB Bridgelux. Non dimmerabile. Compatibile con vetri ALFA medio, acquistabili separatamente.

48Vdc suspension element made of aluminium. Glass diffuser. Magnetic interlocking attachment. Compatible with SQUARE recessed(OTBININ-OTBINIB) and SQUARE surface (OTBINSN-OTBINSB-OTBINSG) systems. Also suitable for ROUND system. Adjustable cables. Bridgelux COB. Non-dimmable. Compatible with ALFA medium glasses, purchased separately.

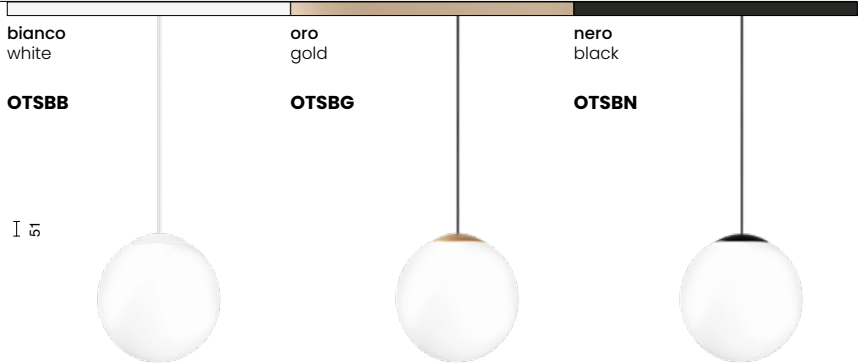

Regolazione cavi a pag. 119 / Cable adjustment p. 119

sorgente luminosa
light source

LED

power: 8W
voltage: 48Vdc
light temperature: 3000K
lumens: 624LM

0,48 Kg
0,0028 m³


Vetro ALFA medio ALFA medium glass	trasparente transparent	ottanio octane	verde green	ambra amber	fumé smoky
	ALFA/MD-TRASP	ALFA/MD-OTTANIO	ALFA/MD-VERDE	ALFA/MD-AMBRA	ALFA/MD-FUME
	Ø 240 Ø 110 230 Ø 200				
	1 Kg 0,02 m³				

Per codici METEL vedere listino See the price list for METEL codes




Accessori Accessories

SQUARE incasso recessed



Binario ad incasso Recessed track

Binario modulare ad incasso 48Vdc in alluminio tagliabile. Gli accessori per l'alimentazione elettrica e la connessione di più moduli sono necessari e non inclusi. Chiusura finale non inclusa.
48Vdc recessed modular track made of cuttable aluminium. Accessories for power supply and connection of multiple modules are required and not included. End cap not included.

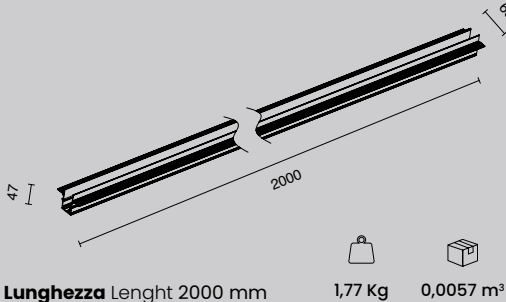


Lunghezza Lenght 2000 mm
1,77 Kg
0,0057 m³

bianco
white

OTBINIB


nero
black

OTBININ



Giunto meccanico Mechanical joint

Elemento in metallo per la connessione meccanica di due binari SQUARE incasso (OTBINIB-OTBININ). Necessario l'uso del connettore elettrico lineare (OTCNN-OTCNB). Kit da due pezzi.
Metal element for mechanical connection of two SQUARE recessed tracks (OTBINIB-OTBININ). Use of the linear electrical connector required (OTCNN-OTCNB). Two piece kit.



OTCI



Connessione curva a U U curved connection

Elemento curvo a U per connettere due binari SQUARE a incasso (OTBININ). Compatibile con OTPBCN-OTPBCG-OTSPC7N-OTSPC7G-OTFAC80N-OTLC80N. Necessario giunto meccanico e connettore elettrico curvo (OTCNDCN).
U curved element for connecting two SQUARE recessed tracks (OTBININ). Compatible with OTPBCN-OTPBCG-OTSPC7N-OTSPC7G-OTFAC80N-OTLC80N. Mechanical joint and curved electrical connector required (OTCNDCN).




2 Kg
0,02 m³

OTCUIN



Connessione curva a C C curved connection

Connessione curva a C con raggio di curvatura 30cm, per binari SQUARE ad incasso (OTBININ) compatibile con OTPBCN-OTPBCG-OTSPC7N-OTSPC7G. Necessario giunto meccanico e connettore elettrico curvo (OTCNDCN). Non è possibile installare i corpi illuminanti nella parte centrale della curva.
C curved connection of radius 30cm, for SQUARE recessed tracks (OTBININ). Compatible with OTPBCN-OTPBCG-OTSPC7N-OTSPC7G. Mechanical joint and curved electrical connector required (OTCNDCN). Luminaires cannot be installed in the middle part of the curve.

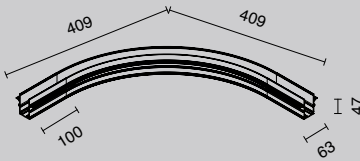


0,97 Kg
0,0077 m³

OTCR30IN



Connessione a T T connection

Elemento a incasso per connessione a T con giunti meccanici inclusi. Necessari connettori elettrici a T (OTCNTB-OTCNTN).
Recessed element for T connection with mechanical joints included. T electrical connectors required (OTCNTB-OTCNTN).

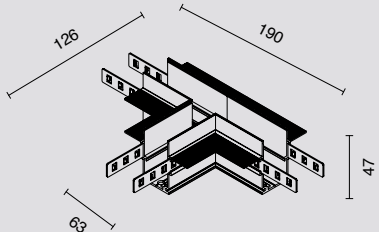


OTTRIB

OTTRIN



Connessione ad angolo complanare Coplanar angle connection

Connessione meccanica angolare complanare a incasso con giunti meccanici inclusi. Necessari connettori elettrici. Compatibile con elementi angolari complanari 48Vdc (OTLAOB-OTLAON).
Recessed coplanar angle mechanical connection with mechanical joints included. Electrical connectors required. Compatible with 48Vdc coplanar angle elements (OTLAOB-OTLAON).



bianco
white

OTANIB


nero
black

OTANIN



Connessione ad angolo perpendicolare Perpendicular angle connection

Connessione meccanica angolare perpendicolare a incasso con giunti meccanici inclusi. Necessari connettori elettrici. Compatibile con elementi angolari perpendicolari 48Vdc (OTLAVN-OTLAVB).
Recessed perpendicular angle mechanical connection with mechanical joints included. Electrical connectors required. Compatible with 48Vdc perpendicular angle elements (OTLAVN-OTLAVB).




OTANVIB

OTANVIN



Chiusura finale End cap

Elemento di chiusura finale per binario SQUARE incasso (OTBININ-OTBINIB).
End cap for SQUARE recessed track (OTBININ-OTBINIB).




OTTIB

OTTIN



Accessori Accessories


SQUARE superficie surface



Binario a superficie
Surface track


Binario modulare a superficie 48Vdc in alluminio tagliabile. Gli accessori per l'alimentazione elettrica e la connessione di più moduli sono necessari e non inclusi. Chiusura finale non inclusa.
48Vdc surface modular track made of cuttable aluminium. Accessories for power supply and connection of multiple modules are required and not included. End cap not included.

Lunghezza Lenght 2000 mm





Giunto meccanico
Mechanical joint

Elemento in metallo per la connessione meccanica di due binari SQUARE superficie (OTBINSB-OTBINSN-OTBINSG). Necessario l'uso del connettore elettrico lineare (OTCNN-OTCNB).
Metal element for mechanical connection of two SQUARE surface tracks (OTBINSB-OTBINSN-OTBINSG). Use of the linear electrical connector required (OTCNN-OTCNB).





Connessione curva ad U
U curved connection

Elemento curvo ad U per connettere due binari SQUARE a superficie (OTBINSN-OTBINSG). Compatibile con OTPBCN-OTPBCG-OTSPC7N-OTSPC7G-OTFAC80N-OTLC80N. Necessario giunto meccanico e connettore elettrico curvo (OTCNDCN).
U curved element for connecting two SQUARE surface tracks (OTBINSN-OTBINSG). Compatible with OTPBCN-OTPBCG-OTSPC7N-OTSPC7G-OTFAC80N-OTLC80N. Mechanical joint and curved electrical connector required (OTCNDCN).

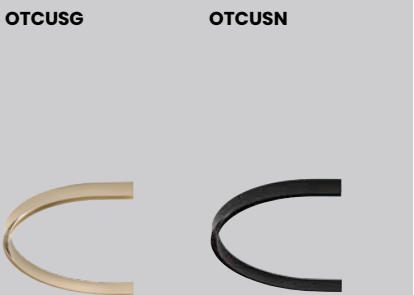



Connessione curva a C
C curved connection

Connessione curva a C con raggio di curvatura 30cm, per binari SQUARE a superficie (OTBINSN-OTBINSG) compatibile con OTPBCN-OTPBCG-OTSPC7N-OTSPC7G. Necessario giunto meccanico e connettore elettrico curvo (OTCNDCN). Non è possibile installare i corpi illuminanti nella parte centrale della curva.
C curved connection of radius 30cm, for SQUARE surface tracks (OTBINSN-OTBINSG). Compatible with OTPBCN-OTPBCG-OTSPC7N-OTSPC7G. Mechanical joint and curved electrical connector required (OTCNDCN). Luminaires cannot be installed in the middle part of the curve.

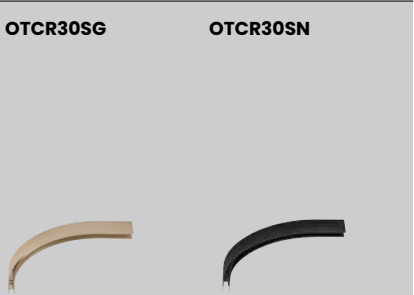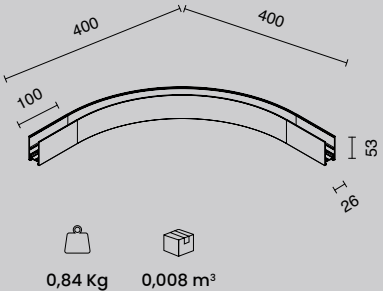


Connessione a T
T connection

Elemento a superficie per connessione a T con giunti meccanici inclusi. Necessari connettori elettrici a T (OTCNTB-OTCNTN).
Surface element for T connection with mechanical joints included. T electrical connectors required (OTCNTB-OTCNTN).

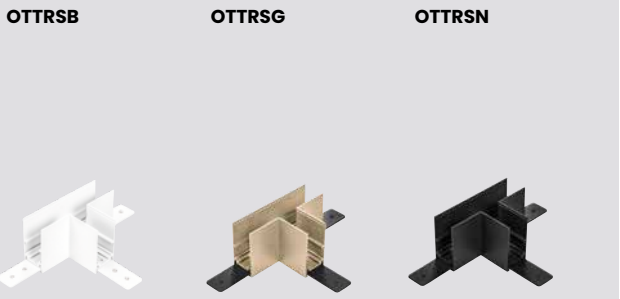



Connessione ad angolo complanare
Coplanar angle connection

Connessione meccanica angolare complanare a superficie con giunti meccanici inclusi. Necessari connettori elettrici. Compatibile con elementi angolari complanari 48Vdc (OTLAOB-OTLAON).
Surface coplanar angle mechanical connection with mechanical joints included. Electrical connectors required. Compatible with 48Vdc coplanar angle elements (OTLAOB-OTLAON).



Connessione ad angolo perpendicolare
Perpendicular angle connection


Connessione meccanica angolare perpendicolare a superficie con giunti meccanici inclusi. Necessari connettori elettrici. Compatibile con elementi angolari perpendicolari 48Vdc (OTLAVN-OTLAVB).
Surface perpendicular angle mechanical connection with mechanical joints included. Electrical connectors required. Compatible with 48Vdc perpendicular angle elements (OTLAVN-OTLAVB).

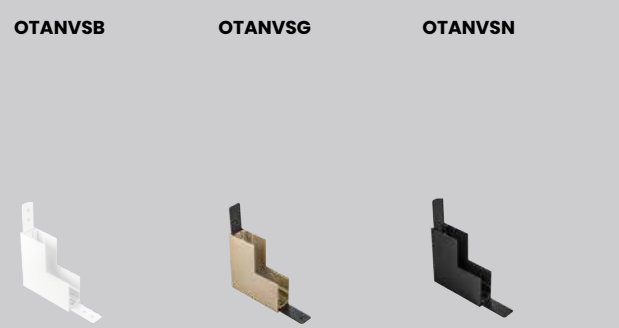


Elementi per sospensione
Elements for suspension

Kit sospensione con 2 cavetti in metallo, compatibile con binario SQUARE a superficie. Adatto anche a sistema ROUND.
Suspension kit with 2 metal cables, compatible with SQUARE surface track. Also suitable for ROUND system.

Asta per sospensione rigida compatibile con binario SQUARE a superficie. Compatibile anche con sistema ROUND.
Rod for rigid suspension, compatible with SQUARE surface track. Also compatible with ROUND system.

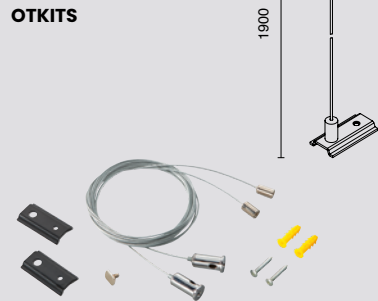


Asta per sospensione rigida con cover per driver OTDRC, compatibile con binari SQUARE a superficie. Compatibile anche con sistema ROUND.
Rod for rigid suspension with cover for driver OTDRC, compatible with SQUARE surface tracks. Also compatible with ROUND system.

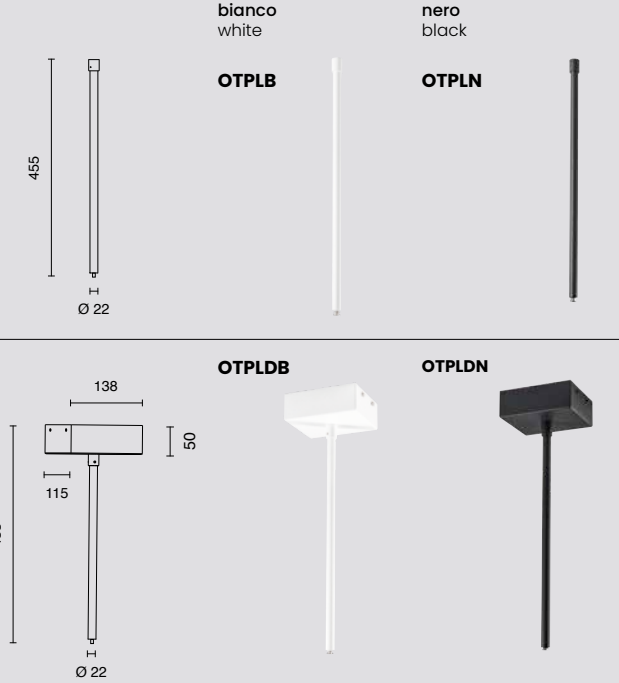

Chiusura finale
End cap



Elemento di chiusura finale per binario SQUARE a superficie (OTBINSB-OTBINSN-OTBINSG). End cap for SQUARE surface track (OTBINSB-OTBINSN-OTBINSG).





Accessori Accessories

SQUARE incasso recessed SQUARE superficie surface



Connettore elettrico lineare
Linear electrical connector

Elemento per la connessione Elettrica di due binari SQUARE ad incasso (OTBININ-OTBINIB), SQUARE a superficie (OTBINSN-OTBINSB-OTBINSG), adatto anche a sistema ROUND. Necessario il giunto meccanico.
Element for electrical connection of two SQUARE recessed tracks (OTBININ-OTBINIB) and SQUARE surface tracks (OTBINSN-OTBINSB-OTBINSG). Also suitable for ROUND system. Mechanical joint required.



bianco
white
OTCNB




nero
black
OTCNN



Connettore elettrico per connessioni curve
Electrical connector for curved connections

Modulo di connessione elettrica per collegare un binario SQUARE (OTBININ- OTBINSN- OTBINSG) ad una connessione curva a C (OTCR30SN-OTCR30SG-OTCR30IN) o ad U (OTCUSN-OTCUSG- OTCUIN). Necessario giunto meccanico.
Electrical connection module for connecting a SQUARE track (OTBININ- OTBINSN- OTBINSG) to a C curved connection (OTCR30SN-OTCR30SG-OTCR30IN) or U curved connection (OTCUSN-OTCUSG-OTCUIN). Mechanical joint required.




OTCNDCN



Connettore elettrico angolare
Angle electrical connector

Modulo di connessione elettrica per angolo, sia complanare che perpendicolare (OTANVIN-OTANVIB-OTANIN-OTANIB- OTANSN-OTANSB-OTANS-OTANSN-OTANSB-OTANSVSG).
Electrical connection module for corner, both coplanar and perpendicular (OTANVIN-OTANVIB-OTANIN-OTANIB- OTANSN-OTANSB-OTANS-OTANSN-OTANSB-OTANSVSG).

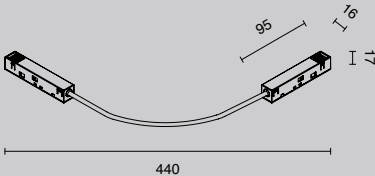

OTCNDB




OTCNDN



Connettore elettrico a T
T electrical connector

Modulo di connessione elettrica per elementi a T (OTTRIN-OTTRIB-OTTRSN-OTTRSB-OTTRSG).
Electrical connection module for T elements (OTTRIN-OTTRIB-OTTRSN-OTTRSB-OTTRSG).



OTCNTB



OTCNTN





Driver e alimentazione

Driver and power supply

SQUARE incasso recessed

SQUARE superficie surface

ROUND superficie surface




Driver attacco magnetico

Magnetic attachment driver

Driver magnetico da installare direttamente a binario. Compatibile con serie SQUARE 48Vdc - ROUND 48Vdc.

Magnetic driver to be installed directly on track. Compatible with SQUARE 48Vdc - ROUND 48Vdc series.



nero

black


OTD100

100W
Vin 220-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20




OTD150

150W
Vin 220-240Vac
Vout 48 Vdc
Ampere 3.1 A
IP20



OTD250

250W
Vin 220-240Vac
Vout 48 Vdc
Ampere 5.2 A
IP20




Driver remoto

Remote driver

Compatibile con qualsiasi sistema 48Vdc. Articolo necessario per l'opzione di alimentazione con driver remoto, indispensabile il collegamento al modulo di input elettrico (OTMIN-OTMIB). Disponibile cover (OTCVB-OTCVG-OTCVN).

Compatible with any 48Vdc system. Item required for power supply option with remote driver, indispensable connection to electrical input module (OTMIN-OTMIB). Cover available (OTCVB-OTCVG-OTCVN).

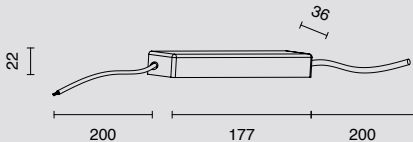


OTDS100

100W
Vin 220-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20



OTDS200

200W
Vin 220-240Vac
Vout 48 Vdc
Ampere 4.2 A
IP20

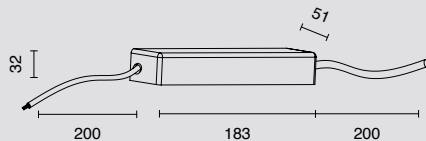


Cover per driver remoto

Cover for remote driver

Compatibile con driver OTDS100 e OTDS200.

Compatible with OTDS100 and OTDS200 drivers.



bianco

white

OTCVB

oro

gold

OTCVG

nero

black

OTCVN




Driver remoto per sospensione rigida

Remote driver for rigid suspension

Articolo necessario per l'opzione di sospensione rigida e alimentazione in remoto, indispensabile il collegamento al modulo di input elettrico (OTMIN-OTMIB). Disponibile asta con cover (OTPLDB-OTPLDN).

Item needed for rigid suspension option and remote power supply, indispensable connection to electrical input module. (OTMIN-OTMIB). Rod with cover available (OTPLDB-OTPLDN).



OTDRC

100W
Vin 100-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20




Modulo di input elettrico

Electrical input module

Articolo necessario per l'opzione di alimentazione con driver remoti (OTDS100-OTDS200-OTDRC).

Item required for power supply option with remote drivers (OTDS100-OTDS200-OTDRC).



OTMIB





OTMIN




Schema regolazione cavi

Cable adjustable scheme



Schema montaggio lente

Lens assembly scheme



Ring

Sistema circolare a binario magnetico 48V con sezione rettangolare. Disponibile nella versione a superficie e ad incasso. Installazione a sospensione realizzabile con apposito KIT. Aggancio a incastro magnetico.


48V magnetic track circular system with rectangular section. Available in surface and recessed versions. Suspension installation achievable with specific KIT. Magnetic interlocking attachment.



RING
Incasso Recessed / Superficie Surface



BINARI MAGNETICI 48V 48V MAGNETIC TRACKS

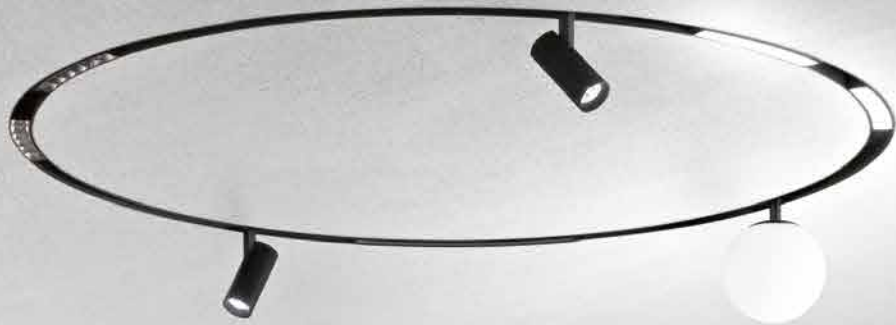

RING INCASSO E SUPERFICIE RING RECESSED AND SURFACE





BINARI MAGNETICI 48V 48V MAGNETIC TRACKS

RING INCASSO E SUPERFICIE RING RECESSED AND SURFACE



Binario magnetico 48V 48V magnetic track

binario a incasso
recessed track



RING incasso recessed

Binario circolare in alluminio a sezione rettangolare, 48Vdc. Versione per installazione ad incasso. Accessori per l'alimentazione elettrica necessari e non inclusi. Compatibile con appositi corpi illuminanti con attacco curvo. Aggancio a incastro magnetico.

Aluminium circular track with rectangular section, 48Vdc. Recessed installation version. Accessories for power supply are required and not included. Compatible with specific luminaires with curved attachment. Magnetic interlocking attachment.

Ring incasso
Ring recessed



corpi illuminanti luminaires
pag. 132

accessori accessories
pag. 136

driver e alimentazione driver and power supply
pag. 138



3,34 Kg



0,034 m³



4,47 Kg





0,048 m³

nero
black

Ø 800
OTBINC180N

Ø 1000
OTBINC1100N

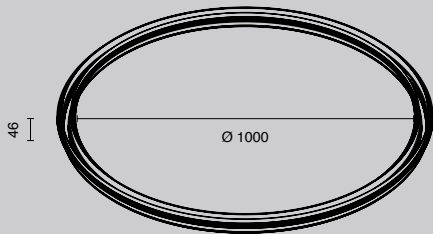




BINARI MAGNETICI 48V 48V MAGNETIC TRACKS

Binario magnetico 48V 48V magnetic track

binario a superficie
surface track



RING superficie surface

Binario circolare in alluminio a sezione rettangolare, 48Vdc. Versione per installazione a superficie. Kit per sospensione disponibile e acquistabile separatamente. Accessori per l'alimentazione elettrica necessari e non inclusi. Compatibile con appositi corpi illuminanti con attacco curvo. Aggancio a incastro magnetico.

Aluminium circular track with rectangular section, 48Vdc. Surface installation version. Suspension kit available and purchased separately. Accessories for power supply are required and not included. Compatible with specific luminaires with curved attachment. Magnetic interlocking attachment.

Ring superficie
Ring surface



RING SUPERFICIE RING SURFACE

corpi illuminanti luminaires
pag. 132

accessori accessories
pag. 136

driver e alimentazione driver and power supply
pag. 138



2,95 Kg




0,033 m³




4,09 Kg



0,053 m³



Ø 800

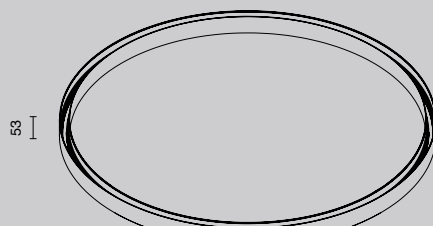

Ø 1000

oro gold
nero black

Ø 800
OTBINC80G

Ø 800
OTBINC80N

Ø 1000
OTBINC100G


Ø 1000
OTBINC100N



RING incasso


RING recessed

Schema di installazione Installation scheme



Sistema circolare a binario magnetico 48V con sezione rettangolare. Disponibile nella versione a superficie e ad incasso. Installazione a sospensione realizzabile con apposito KIT. Aggancio a incastro magnetico.

48V magnetic track circular system with rectangular section. Available in surface and recessed versions. Suspension installation achievable with specific KIT. Magnetic interlocking attachment.

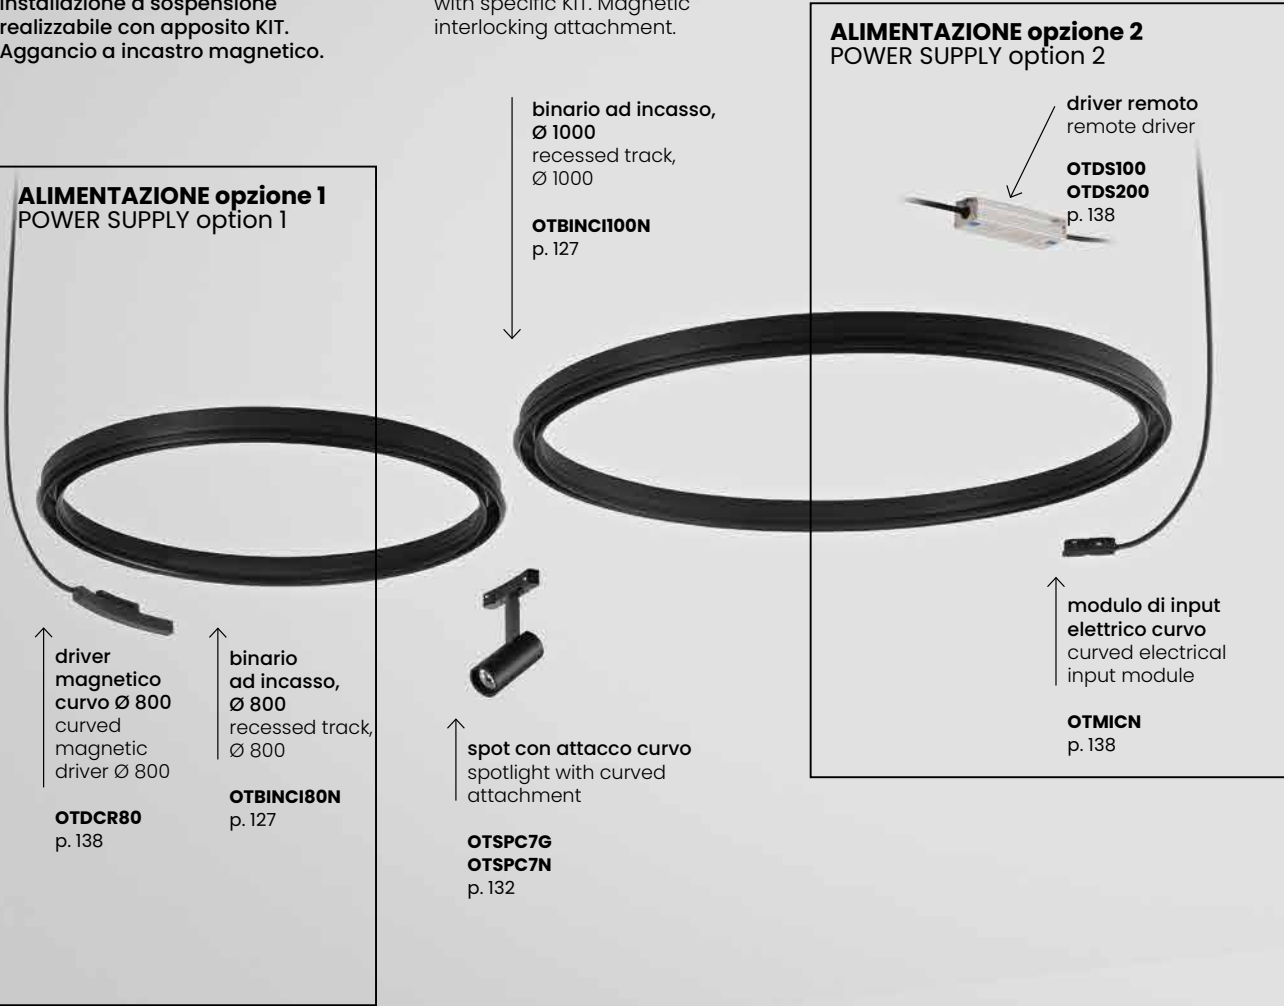


corpi illuminanti luminaires



spot con attacco curvo
spotlight with curved attachment

p. 132



sfera LED con attacco curvo
LED sphere with curved attachment

p. 133



elemento lineare curvo
curved linear element

p. 134



elemento beta curvo
curved beta element


p. 135

Compatibili con i sistemi RING e SQUARE raccordi curvi / Compatible with RING and SQUARE systems curved fittings

RING superficie


RING surface

Schema di installazione Installation scheme



Sistema circolare a binario magnetico 48V con sezione rettangolare. Disponibile nella versione a superficie e ad incasso. Installazione a sospensione realizzabile con apposito KIT. Aggancio a incastro magnetico.



48V magnetic track circular system with rectangular section. Available in surface and recessed versions. Suspension installation achievable with specific KIT. Magnetic interlocking attachment.

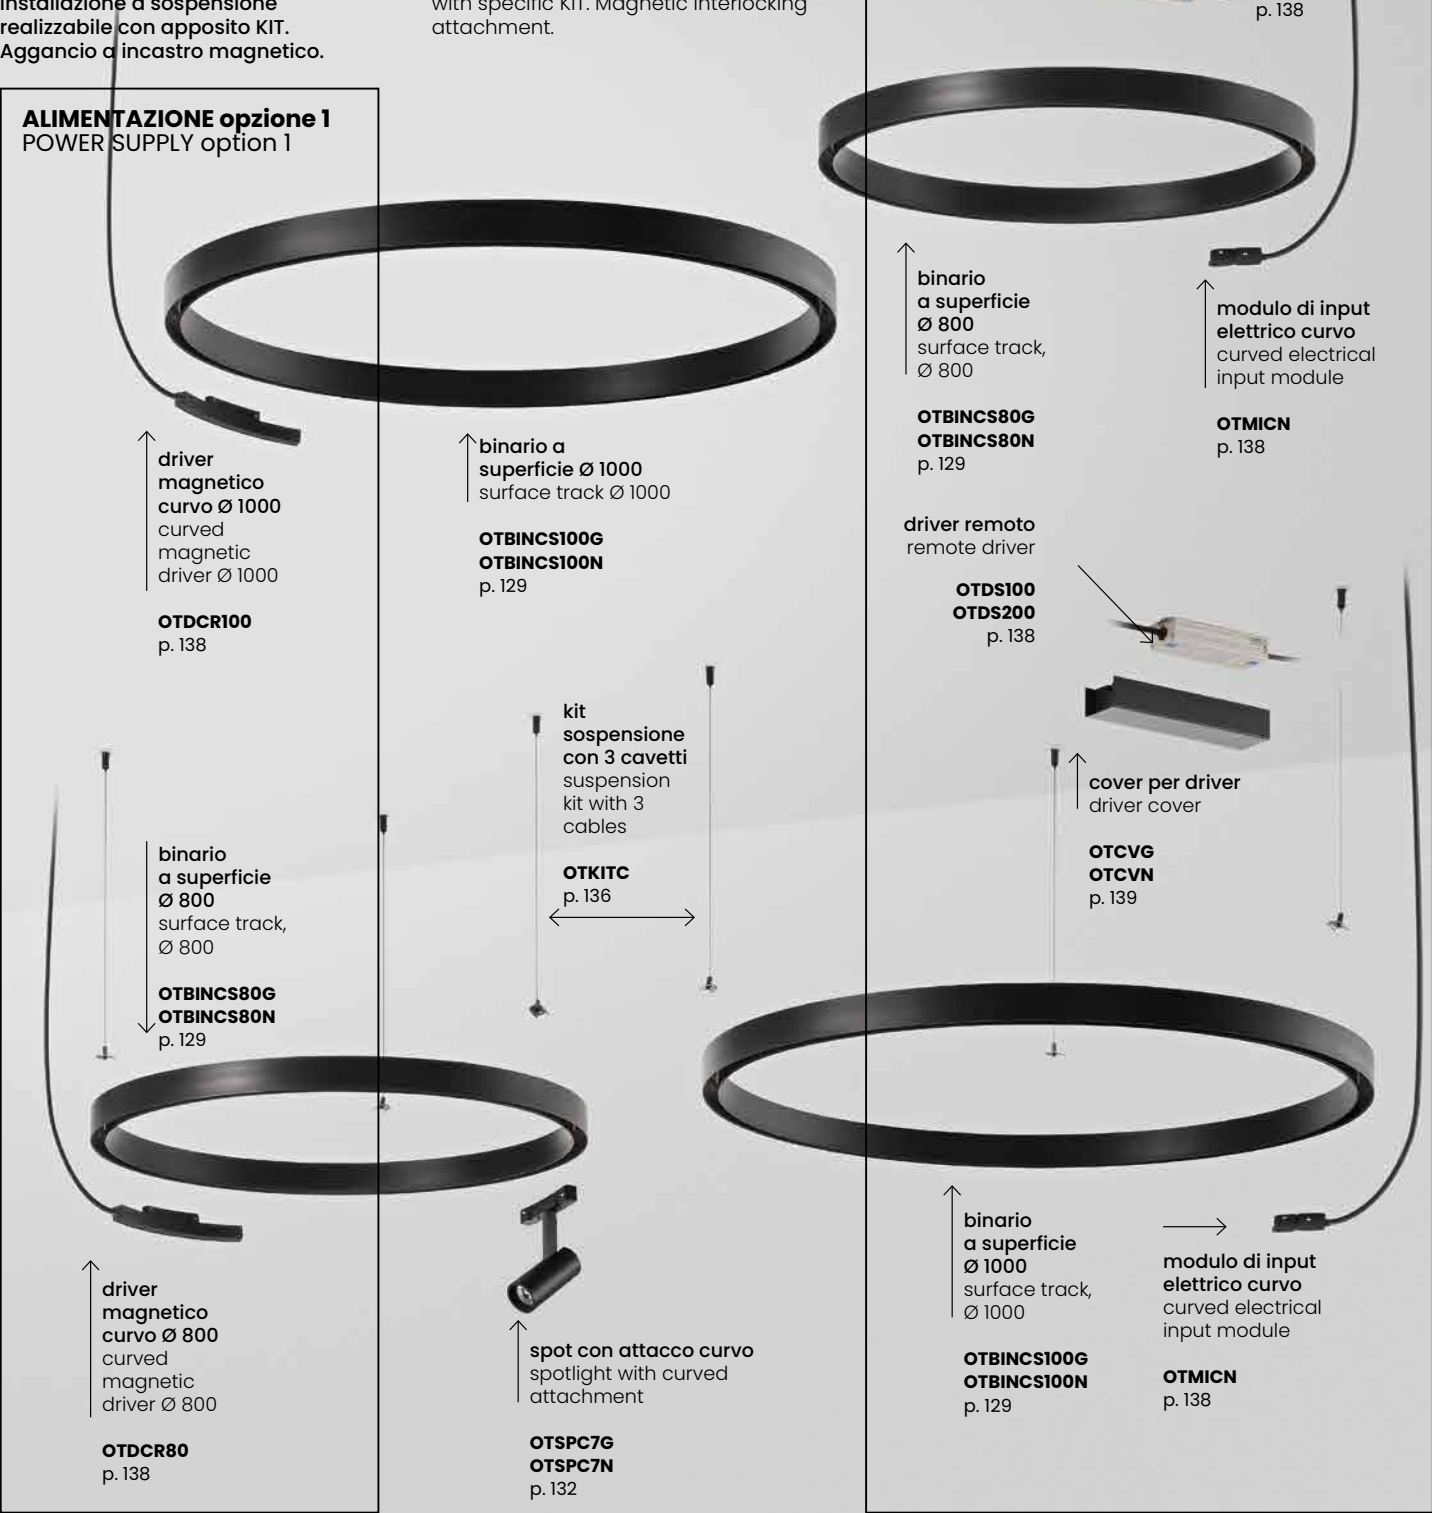

RING INCASSO E SUPERFICIE RING RECESSED AND SURFACE

Spot con attacco curvo Spotlight with curved attachment

compatibile con i seguenti binari
compatible with the following tracks

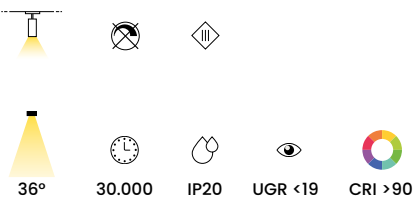


Faretto orientabile LED a 48Vdc in alluminio. Diffusore in policarbonato. Attacco curvo ad incastro magnetico. Compatibile con: sistema RING (OTBINCI80N-OTBINCI100N-OTBINCS80N-OTBINCS80G-OTBINCS100N-OTBINCS100G). Adatto anche a connessioni a C e a U del sistema SQUARE. COB Bridgelux. Non dimmerabile.

48Vdc LED adjustable spotlight made of aluminium. Polycarbonate diffuser. Magnetic interlocking curved attachment. Compatible with RING system (OTBINCI80N-OTBINCI100N-OTBINCS80N-OTBINCS80G-OTBINCS100N-OTBINCS100G). Also suitable for C joints and U joints of SQUARE system. Bridgelux COB. Non-dimmable.



sorgente luminosa
light source
LED

power: 7W
voltage: 48Vdc
light temperature: 3000K
lumens: 546LM



0,20 Kg
0,00014 m³

oro
gold

OTSPC7G





nero
black

OTSPC7N



Sfera LED con attacco curvo LED sphere with curved attachment

compatibile con i seguenti binari
compatible with the following tracks

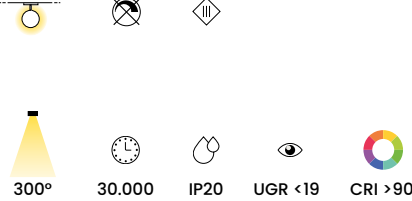


Sfera LED a 48Vdc in alluminio. Diffusore in vetro. Attacco curvo ad incastro magnetico. Compatibile con sistema RING (OTBINCI80N-OTBINCI100N-OTBINCS80N-OTBINCS80G-OTBINCS100N-OTBINCS100G). Adatto anche a connessioni a C e a U del sistema SQUARE. COB Bridgelux. Non dimmerabile.

48Vdc LED sphere made of aluminium. Glass diffuser. Magnetic interlocking curved attachment. Compatible with RING system (OTBINCI80N-OTBINCI100N-OTBINCS80N-OTBINCS80G-OTBINCS100N-OTBINCS100G). Also suitable for C joints and U joints of SQUARE system. Bridgelux COB. Non-dimmable.



sorgente luminosa
light source
LED

power: 8W
voltage: 48Vdc
light temperature: 3000K
lumens: 624LM



0,48 Kg
0,0022 m³

oro
gold

OTPCBG





nero
black

OTPCBN



Elemento lineare curvo Curved linear element

compatibile con i seguenti binari
compatible with the following tracks

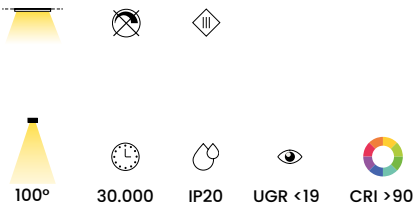


Elemento lineare curvo a 48 Vdc in alluminio. Diffusore in policarbonato. Attacco curvo ad incastro magnetico. Compatibile con binario circolare RING (OTBINCI100N-OTBINCI80N-OTBINCS100N-OTBINCS80N-OTBINCS100G-OTBINCS80G). Ciascun diametro ha il suo attacco dedicato (80/100 cm). Compatibile anche con connessione ad U, sistema SQUARE. LED Osram. Non dimmerabile

48Vdc curved linear element made of aluminium. Polycarbonate diffuser. Magnetic interlocking curved attachment. Compatible with RING circular track (OTBINCI100N-OTBINCI80N-OTBINCS100N-OTBINCS80N-OTBINCS100G-OTBINCS80G). Each diameter has its own specific attachment (80/100 cm). Also compatible with U joint of SQUARE system. Osram LED. Non-dimmable.

sorgente luminosa
light source
LED

power: 9W
voltage: 48Vdc
light temperature: 3000K
lumens: 702LM




0,14 Kg 0,00016 m³

nero
black
OTLC80N



compatibile con Ø 800 mm
compatible with Ø 800 mm

power: 9W
voltage: 48Vdc
light temperature: 3000K
lumens: 702LM



0,14 Kg 0,00017 m³


nero
black
OTLC100N



compatibile con Ø 1000 mm
compatible with Ø 1000 mm

Elemento beta curvo Curved beta element

compatibile con i seguenti binari
compatible with the following tracks

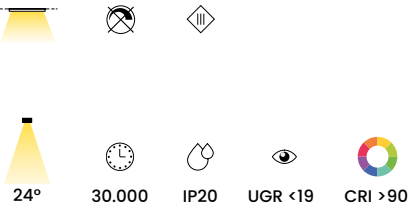


Elemento beta a 48 Vdc in alluminio. Diffusore in policarbonato. Attacco curvo ad incastro magnetico. Compatibile con binario circolare RING (OTBINCI100N-OTBINCI80N-OTBINCS100N-OTBINCS80N-OTBINCS100G-OTBINCS80G). Ciascun diametro ha il suo attacco dedicato (80/100 cm). Compatibile anche con connessione ad U, sistema SQUARE. LED Osram. Non dimmerabile.

48Vdc curved beta element made of aluminium. Polycarbonate diffuser. Magnetic interlocking curved attachment. Compatible with RING circular track (OTBINCI100N-OTBINCI80N-OTBINCS100N-OTBINCS80N-OTBINCS100G-OTBINCS80G). Each diameter has its own specific attachment (80/100 cm). Also compatible with U joint of SQUARE system. Non-dimmable.

sorgente luminosa
light source
LED

power: 9W
voltage: 48Vdc
light temperature: 3000K
lumens: 720LM




0,14 Kg 0,00016 m³

nero
black
OTFAC80N



compatibile con Ø 800 mm
compatible with Ø 800 mm

power: 9W
voltage: 48Vdc
light temperature: 3000K
lumens: 720LM



0,14 Kg 0,00017 m³


nero
black
OTFAC100N



compatibile con Ø 1000 mm
compatible with Ø 1000 mm



Accessori Accessories

RING incasso e superficie RING recessed and surface



Binario da incasso Recessed track

Binario circolare in alluminio a sezione rettangolare, 48Vdc. Versione per installazione ad incasso. Accessori per l'alimentazione elettrica necessari e non inclusi. Compatibile con appositi corpi illuminanti con attacco curvo. Aggancio a incastro magnetico. Aluminium circular track with rectangular section, 48Vdc. Recessed installation version. Accessories for power supply are required and not included. Compatible with specific luminaires with curved attachment. Magnetic interlocking attachment.



oro
gold

nero
black

Ø 800 mm
OTBINCI80N



3,34 Kg



0,034 m³

Ø 1000 mm
OTBINCI100N





4,47 Kg



0,048 m³

Binario a superficie Surface track

Binario circolare in alluminio a sezione rettangolare, 48Vdc. Versione per installazione a superficie. Kit per sospensione disponibile e acquistabile separatamente. Accessori per l'alimentazione elettrica necessari e non inclusi. Compatibile con appositi corpi illuminanti con attacco curvo. Aggancio a incastro magnetico. Aluminium circular track with rectangular section, 48Vdc. Surface installation version. Suspension kit available and purchased separately. Accessories for power supply are required and not included. Compatible with specific luminaires with curved attachment. Magnetic interlocking attachment.



Ø 800 mm
OTBINC80G



Ø 800 mm
OTBINC80N



2,95 Kg



0,033 m³

Ø 1000 mm
OTBINC100G



Ø 1000 mm
OTBINC100N




4,09 Kg



0,053 m³

Kit sospensione Suspension kit

kit sospensione con 3 cavetti in metallo. Compatibile con la serie RING a superficie. Suspension kit with 3 metal cables. Compatible with RING surface series.



OTKITC




Driver e alimentazione Driver and power supply

RING incasso e superficie RING recessed and surface



Driver remoto Remote driver


Compatibile con qualsiasi sistema a 48Vdc. Articolo necessario per l'opzione di alimentazione con driver remoto, indispensabile il collegamento al modulo di input elettrico (OTMICN).
Compatible with any 48Vdc system. Item required for power supply option with remote driver, indispensable connection to electrical input module (OTMICN).

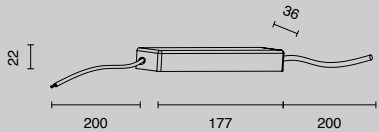

nero
black


OTDS100

100W
Vin 220-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20




OTDS200

200W
Vin 220-240Vac
Vout 48 Vdc
Ampere 4.2 A
IP20



Modulo di input elettrico curvo Curved electrical input module

Articolo necessario per l'opzione di alimentazione con driver remoto. (OTDS100-OTDS200). Il modulo è adattabile a diverse curvature.
Item required for power supply option with remote driver (OTDS100-OTDS200). The module is adaptable to different curves.




OTMICN



Driver magnetico per Ø 800 Magnetic driver for Ø 800

Driver magnetico da installare direttamente a binario. Compatibile con RING diametro 800 mm (OTBINCI80N-OTBINC80G-OTBINC80N).
Magnetic driver to be installed directly on track. Compatible with RING diameter 800 mm (OTBINCI80N-OTBINC80G-OTBINC80N).

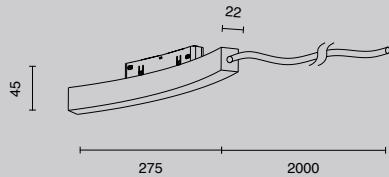


OTDCR80

100W
Vin 220-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20




Driver magnetico per Ø 1000 Magnetic driver for Ø 1000

Driver magnetico da installare direttamente a binario. Compatibile con RING diametro 1000 mm (OTBINCI100N-OTBINC100N-OTBINC100G).
Magnetic driver to be installed directly on track. Compatible with RING diameter 1000 mm (OTBINCI100N-OTBINC100N-OTBINC100G).

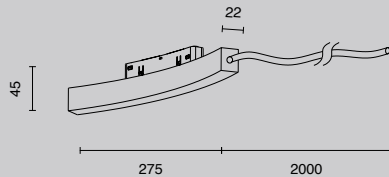


OTDCR100

100W
Vin 220-240Vac
Vout 48 Vdc
Ampere 2.1 A
IP20



Cover per driver remoto Cover for remote driver

Compatibile con driver OTDS100 e OTDS200.
Compatible with drivers OTDS100 and OTDS200.



oro
gold

OTCVG



nero
black

OTCVN



indoor

Faretti da incasso

Recessed spotlights




Rex

Faretto LED ad incasso. Struttura in alluminio. Diffusore in policarbonato. Finitura in bianco opaco. Ottica rientrante. Driver incluso. COB Bridgelux.
Recessed LED spotlight. Aluminium structure. Polycarbonate diffuser. Matte white finish. Driver included. Bridgelux COB.


sorgente luminosa
light source

LED

power: 20W
voltage: 220-240Vac



power: 40W
voltage: 220-240Vac



faretto incasso
recessed spotlight



bianco
white

OTF0074BL

3000K 1600LM

OTF0075BL

4000K 1700LM



faretto incasso
Recessed spotlight



bianco
white

OTF0076BL

3000K 3100LM

OTF0077BL

4000K 3220LM






INTERNO INDOOR

Lost

Faretto LED da incasso. Struttura in alluminio, diffusore in policarbonato. Driver incluso.
Recessed LED spotlight. Aluminium structure. Polycarbonate diffuser. Driver included.

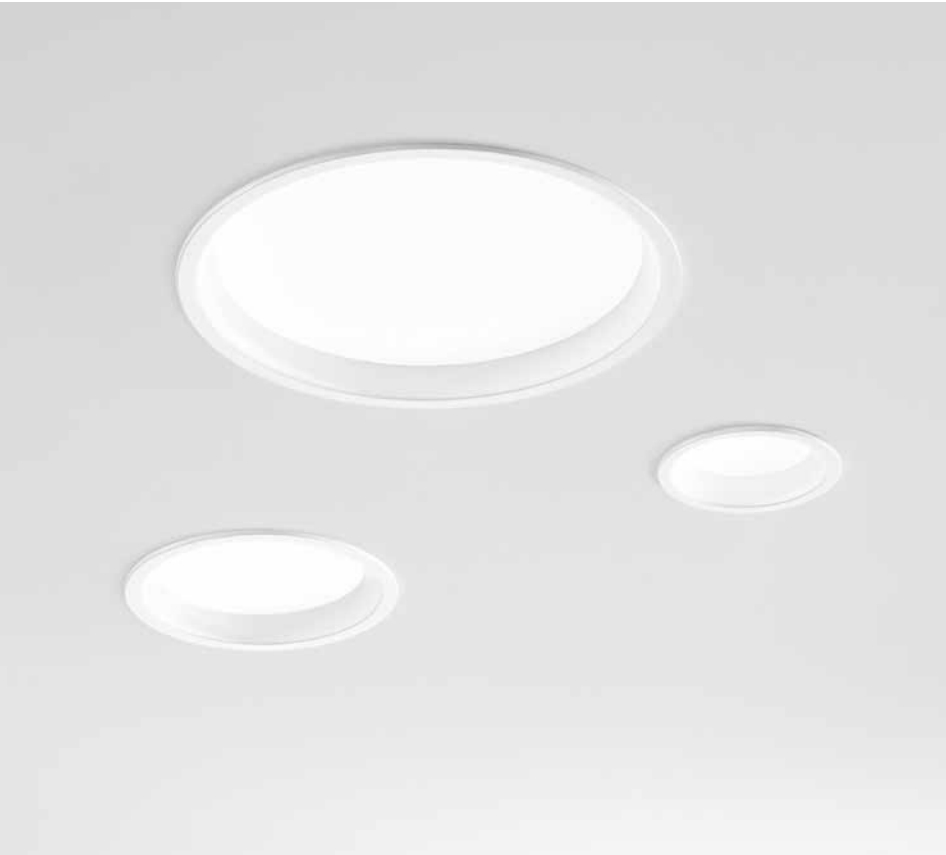

FARETTI DA INCASSO RECESSED SPOTLIGHTS

faretto incasso
recessed spotlight




			
110°	30.000	IP20	Ø 75
			
UGR <19	CRI >90	0,1 Kg	0,00072 m³

bianco white			
OTF0068BL	3000K	585LM	
OTF0069BL	4000K	630LM	



sorgente luminosa
light source
LED
power: 9W
voltage: 220-240Vac




			
110°	30.000	IP20	Ø 130
			
UGR <19	CRI >90	0,22 Kg	0,0015 m³

bianco white			
OTF0070BL	3000K	1170LM	
OTF0071BL	4000K	1260LM	



sorgente luminosa
light source
LED
power: 18W
voltage: 220-240Vac




			
110°	30.000	IP20	Ø 205
			
UGR <19	CRI >90	0,42 Kg	0,0031 m³

bianco white			
OTF0072BL	3000K	2340LM	
OTF0073BL	4000K	2520LM	



sorgente luminosa
light source
LED
power: 36W
voltage: 220-240Vac



Womb square

Faretto LED ad incasso. Struttura in alluminio. Finitura in bianco opaco. Diffusore in policarbonato. Driver incluso.
Recessed LED spotlight. Aluminium structure. Matte white finish. Polycarbonate diffuser. Driver included.



faretto incasso
recessed spotlight




 110°	 30.000	 IP20	 105 x 105
 UGR <19	 CRI >90	 0,17 Kg	 0,00087 m³
bianco white			
OTF0086BL	3000K	390LM	
OTF0087BL	4000K	420LM	

 110°	 30.000	 IP20	 155 x 155
 UGR <19	 CRI >90	 0,31 Kg	 0,0016 m³
bianco white			
OTF0088BL	3000K	880LM	
OTF0089BL	4000K	970LM	


 110°	 30.000	 IP20	 205 x 205
 UGR <19	 CRI >90	 0,4 Kg	 0,0026 m³
bianco white			
OTF0090BL	3000K	1470LM	
OTF0091BL	4000K	1660LM	




sorgente luminosa
light source
LED
power: 6W
voltage: 220-240Vac



sorgente luminosa
light source
LED
power: 12W
voltage: 220-240Vac




sorgente luminosa
light source
LED
power: 18W
voltage: 220-240Vac



Womb circle

Faretto LED ad incasso. Struttura in alluminio. Finitura in bianco opaco. Diffusore in policarbonato. Driver incluso.
Recessed LED spotlight. Aluminium structure. Matte white finish. Polycarbonate diffuser. Driver included.

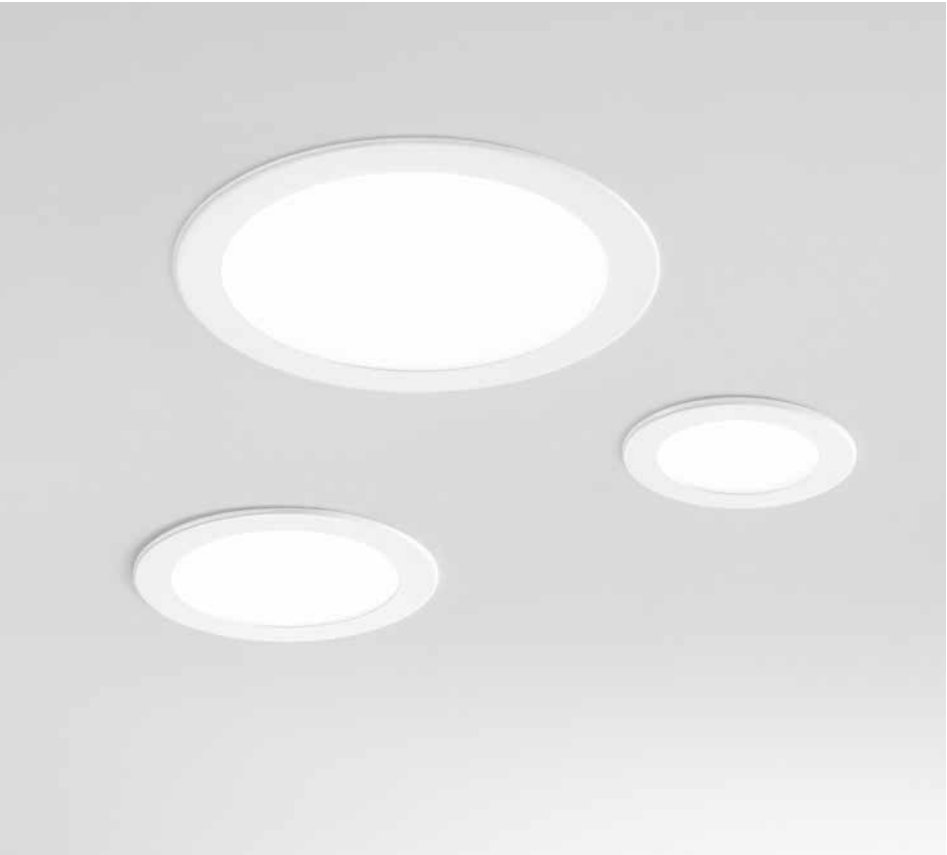

faretto incasso
recessed spotlight




 110°	 30.000	 IP20	 Ø 105
 UGR <19	 CRI >90	 0,15 Kg	 0,00087 m³
bianco white			
OTF0080BL	3000K	390LM	
OTF0081BL	4000K	420LM	

 110°	 30.000	 IP20	 Ø 155
 UGR <19	 CRI >90	 0,26 Kg	 0,0016 m³
bianco white			
OTF0082BL	3000K	880LM	
OTF0083BL	4000K	970LM	


 110°	 30.000	 IP20	 Ø 205
 UGR <19	 CRI >90	 0,43 Kg	 0,0026 m³
bianco white			
OTF0084BL	3000K	1470LM	
OTF0085BL	4000K	1660LM	




sorgente luminosa
light source
LED
power: 6W
voltage: 220-240Vac



sorgente luminosa
light source
LED
power: 12W
voltage: 220-240Vac



sorgente luminosa
light source
LED
power: 18W
voltage: 220-240Vac







Duel


Faretto LED ad incasso. Struttura in alluminio. Diffusore rientrante in policarbonato. Finitura in bianco opaco e nero opaco. Driver incluso. COB Bridgelux.
Recessed LED spotlight. Aluminium structure. Polycarbonate recessed diffuser. Matte white and matte black finish. Driver included. Bridgelux COB.



sorgente luminosa
light source

LED

power: 15W
voltage: 220-240Vac



faretto incasso
recessed spotlight



24°

30.000

IP20

Ø 80

UGR <19

CRI >90

0,25 Kg

0,001 m³

bianco white		nero black	
OTF0094BL	OTF0092NL	3000K	1170LM
OTF0095BL	OTF0093NL	4000K	1275LM






Mad

Faretto LED ad incasso. Struttura in alluminio. Diffusore rientrante in policarbonato. Finitura in bianco opaco e nero opaco. Driver incluso. COB Bridgelux.
Recessed LED spotlight. Aluminium structure. Polycarbonate recessed diffuser. Matte white and matte black finish. Driver included. COB Bridgelux.

sorgente luminosa
light source
LED

power: 5W
voltage: 220-240Vac



faretto incasso
recessed spotlight



50°30.000IP20Ø 35UGR <19CRI >900,24 Kg0,00036 m³

bianco white		nero black	
OTF0048BL		OTF0046NL	3000K 350LM
OTF0049BL		OTF0047NL	4000K 377LM



Omnia

Faretto LED ad incasso. Struttura in alluminio. Diffusore in policarbonato. Finitura in bianco opaco e nero opaco. Driver incluso. COB Bridgelux.
Recessed LED spotlight. Aluminium structure. Polycarbonate diffuser. Matte white and matte black finish. Driver included. Bridgelux COB.

INTERNO INDOOR



sorgente luminosa
light source

LED

power: 3W
voltage: 220-240Vac

faretto incasso
recessed spotlight



bianco
white

nero
black

OTF0038BL
OTF0040BL

OTF0039NL
OTF0041NL

3000K	195LM
4000K	210LM



Egg

Faretto LED ad incasso, orientabile.
Struttura in alluminio. Diffusore in
polycarbonato. Finitura in bianco opaco
e nero opaco. Driver incluso.
COB Bridgelux.

Adjustable recessed LED spotlight.
Aluminium structure. Polycarbonate
diffuser. Matte white and matte black
finish. Driver included. Bridgelux COB.



sorgente luminosa
light source

LED

power: 3W
voltage: 220-240Vac

Technical drawing of a chair. The height is indicated as 44 and the diameter of the base is indicated as Ø 52.

faretto incasso orientabile
adjustable recessed spotlight



bianca
white

nero
black

OTF0044BL

OTF0045BL

OTF0042NL

OTF0043NL

3000K	195LM
4000K	210LM



FARETTI DA INCASSO RECESSED SPOTLIGHTS

INTERNO INDOOR



FARETTI DA INCASSO RECESSED SPOTLIGHTS

A photograph of three black, circular recessed ceiling lights. The lights are arranged in a diagonal pattern on a white ceiling. Each light has a black, slightly flared outer ring and a white, circular center. The lighting is soft and even, highlighting the clean, minimalist design of the fixtures.








Tresor

Faretto LED ad incasso. Struttura in alluminio. Finitura in bianco opaco e nero opaco. Diffusore in policarbonato. Driver incluso. COB Bridgelux.
Recessed LED spotlight. Aluminium structure. Matte white and matte black finish. Polycarbonate diffuser. Driver included. Bridgelux COB.

sorgente luminosa
light source
LED

power: 12W
voltage: 220-240Vac



faretto incasso
recessed spotlight



bianco white	nero black		
OTF0052BL	OTF0050NL	3000K	895LM
OTF0053BL	OTF0051NL	4000K	925LM






Guaba

Faretto LED ad incasso, orientabile.
Struttura in alluminio. Finitura in bianco
opaco e nero opaco. Diffusore rientrante in
policarbonato. Driver incluso. COB Bridgelux.
Adjustable recessed LED spotlight. Aluminium
structure. Matte white and matte black finish.
Polycarbonate recessed diffuser.
Driver included. Bridgelux COB.

sorgente luminosa
light source
LED

power: 15W
voltage: 220-240Vac



fareto incasso orientabile adjustable recessed spotlight																				
				24°		30.000		IP20		Ø 70		UGR <19		CRI >90		0,38 Kg		0,00093 m³		
																				
bianco white					nero black															
OTF0078BL					OTF0079NL										3000K			1050LM		






Sub


Faretto ad incasso, a filo. Versione a 5 o 10 COB. Struttura in alluminio. Diffusore in policarbonato con ottica antiabbaglio. Mascherina antiabbaglio nera. Driver incluso. LED Osram.
Recessed spotlight. 5 or 10 COB version. Aluminium structure. Anti-glare polycarbonate diffuser. Black anti-glare cover. Driver included. Osram LED.

sorgente luminosa
light source
LED

power: 10W
voltage: 220-240Vac



power: 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight



bianco
white

OTF0096BL	3000K	805LM
OTF0097BL	4000K	828LM



faretto incasso
Recessed spotlight



bianco
white

OTF0098BL	3000K	1607LM
OTF0099BL	4000K	1660LM





Kitty

Faretto LED ad incasso, orientabile.
Struttura in alluminio. Finitura in bianco
opaco e nero opaco. Diffusore in
polycarbonato. Driver incluso.
COB Bridgelux.
Adjustable recessed LED spotlight.
Aluminium structure. Matte white and
matte black finish. Polycarbonate
diffuser. Driver included. Bridgelux COB.



sorgente luminosa
light source
LED

power: 30W
voltage: 220-240Vac


faretto incasso orientabile
adjustable recessed spotlight





24°30.000IP20Ø 125UGR < 19CRI > 900,69 Kg0,003 m³

bianco white	nero black		
OTF0056BL	OTF0054NL	3000K	2350LM
OTF0057BL	OTF0055NL	4000K	2440LM






Beach

Faretto LED ad incasso. Struttura in alluminio. Finitura in bianco opaco e nero opaco. Diffusore in policarbonato. Driver incluso. COB Bridgelux. IP54. Recessed LED spotlight. Aluminium structure. Matte white and matte black finish. Polycarbonate diffuser. Driver included. Bridgelux COB. IP54.

sorgente luminosa
light source
LED

power: 9W
voltage: 220-240Vac




Bath

Faretto LED ad incasso. Struttura in alluminio. Finitura in bianco opaco e nero opaco. Diffusore in policarbonato. Driver incluso. COB Bridgelux. IP54. Recessed LED spotlight. Aluminium structure. Matte white and matte black finish. Polycarbonate diffuser. Driver included. Bridgelux COB. IP54.

sorgente luminosa
light source
LED

power: 9W
voltage: 220-240Vac

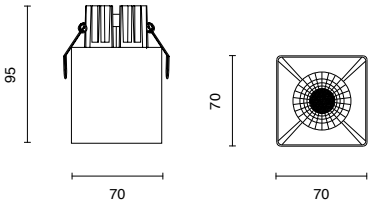

faretto incasso
recessed spotlight



bianco white	nero black		
OTF0101BL	OTF0100NL	3000K	585LM



faretto incasso
recessed spotlight



bianco white	nero black		
OTF0103BL	OTF0102NL	3000K	585LM






Daft

Faretto GU10 ad incasso. Struttura in lega di zinco. Finitura in bianco opaco e nero opaco. IP44.
Recessed GU10 spotlight. Zinc alloy structure. Matte white and matte black finish. IP44.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight



IP44



Ø 75



0,14 Kg



0,00052 m³

bianco
white

OTF104B



nero
black

OTF105N






Fabric

Faretto GU10 ad incasso. Struttura in alluminio. Finitura in bianco opaco e nero opaco. IP44.
Recessed GU10 spotlight. Aluminium structure. Matte white and matte black finish. IP44.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight



IP44 Ø 75 0,14 Kg 0,00069 m³

bianco
white

nero
black

OTF0011B

OTF0012N






Lampo

Faretto GU10 ad incasso. Struttura in alluminio. Finitura in bianco opaco, nero opaco, oro e cromo.
 Recessed GU10 spotlight. Aluminium structure. Finish in matte white, matte black, gold and chrome.

sorgente luminosa
 light source

GU10
 lampadine non incluse
 light bulbs not included

max power: 1 x 20W
 voltage: 220-240Vac



faretto incasso
 recessed spotlight



IP20



Ø 75



0,15 Kg



0,0006 m³

bianco
 white

OTF0001B

cromo
 chrome

OTF0003C

oro
 gold

OTF0004G

nero
 black

OTF0002N




Cromie

Faretto GU10 ad incasso, lampada
rientrante. Struttura in alluminio. Finitura
in bianco opaco e nero opaco.
Recessed GU10 spotlight, recessed lamp.
Aluminium structure. Matte white and
matte black finish.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight



IP20



Ø 75



0,17 Kg



0,00069 m³

bianco
white

OTF0015B



nero
black

OTF0016N



Valley


Faretto GU10 ad incasso. Struttura in alluminio. Finitura in bianco opaco e nero opaco. .
Recessed GU10 spotlight. Aluminium structure. Matte white and matte black finish.



sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight





bianco
white

nero
black

OTF0013B

OTF0014N



Tuono


Faretto GU10 ad incasso. Struttura in alluminio. Finitura in bianco opaco e nero opaco.
Recessed GU10 spotlight. Aluminium structure. Matte white and matte black finish.



sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
Recessed spotlight





bianco
white

nero
black

OTF0005B

OTF0006N






Tenax

Faretto GU10 ad incasso, lampada rientrante. Struttura in alluminio. Finitura in bianco opaco e nero opaco. Recessed GU10 spotlight, recessed lamp. Aluminium structure. Matte white and matte black finish.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac




Migo

Faretto GU10 ad incasso. Struttura in alluminio. Disponibile in diverse finiture. Recessed GU10 spotlight. Aluminium structure. Available in different finishes.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight



IP20

Ø 70

0,11 Kg

0,0006 m³

bianco
white

nero
black

OTF0025B

OTF0026N



faretto incasso
recessed spotlight



IP20

Ø 75

0,11 Kg

0,0006 m³

bianco
white

nero
black

OTF0009B

OTF0010N




Gibò

Faretto GU10 ad incasso. Struttura in alluminio. Finitura in bianco opaco, nero opaco e oro.
Recessed GU10 spotlight. Aluminium structure. Finish in matte white, matte black and gold.



sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



fareto incasso
recessed spotlight

IP20

Ø 90

0,099 Kg

0,00067 m³

bianco
white

oro
gold

nero
black

OTF0022B

OTF0024G

OTF0023N


Baya

Faretto GU10 ad incasso. Struttura in alluminio. Finitura in bianco opaco, nero opaco e oro.
Recessed GU10 spotlight. Aluminium structure. Finish in matte white, matte black and gold.



sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



fareto incasso
recessed spotlight

IP20

Ø 90

0,082 Kg

0,0005 m³

bianco
white

oro
gold

nero
black

OTF0019B

OTF0021G

OTF0020N




INTERNO INDOOR

Pacha

Faretto GU10 ad incasso. Struttura in alluminio. Finitura in bianco opaco e nero opaco.
Recessed GU10 spotlight. Aluminium structure. Matte white and matte black finish.

sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight



IP20 Ø 75 0,17 Kg 0,00077 m³

bianco white	nero black
OTF0007B	OTF0008N



FARETTI DA INCASSO RECESSED SPOTLIGHTS




Digital

Faretto GU10 ad incasso, lampada rientrante. Struttura in alluminio. Finitura in bianco opaco e nero opaco.
Recessed GU10 spotlight, recessed lamp. Aluminium structure. Matte white and matte black finish.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight



IP20



75x75



0,12 Kg



0,00059 m³

bianco
white


OTF0027B



nero
black

OTF0028N



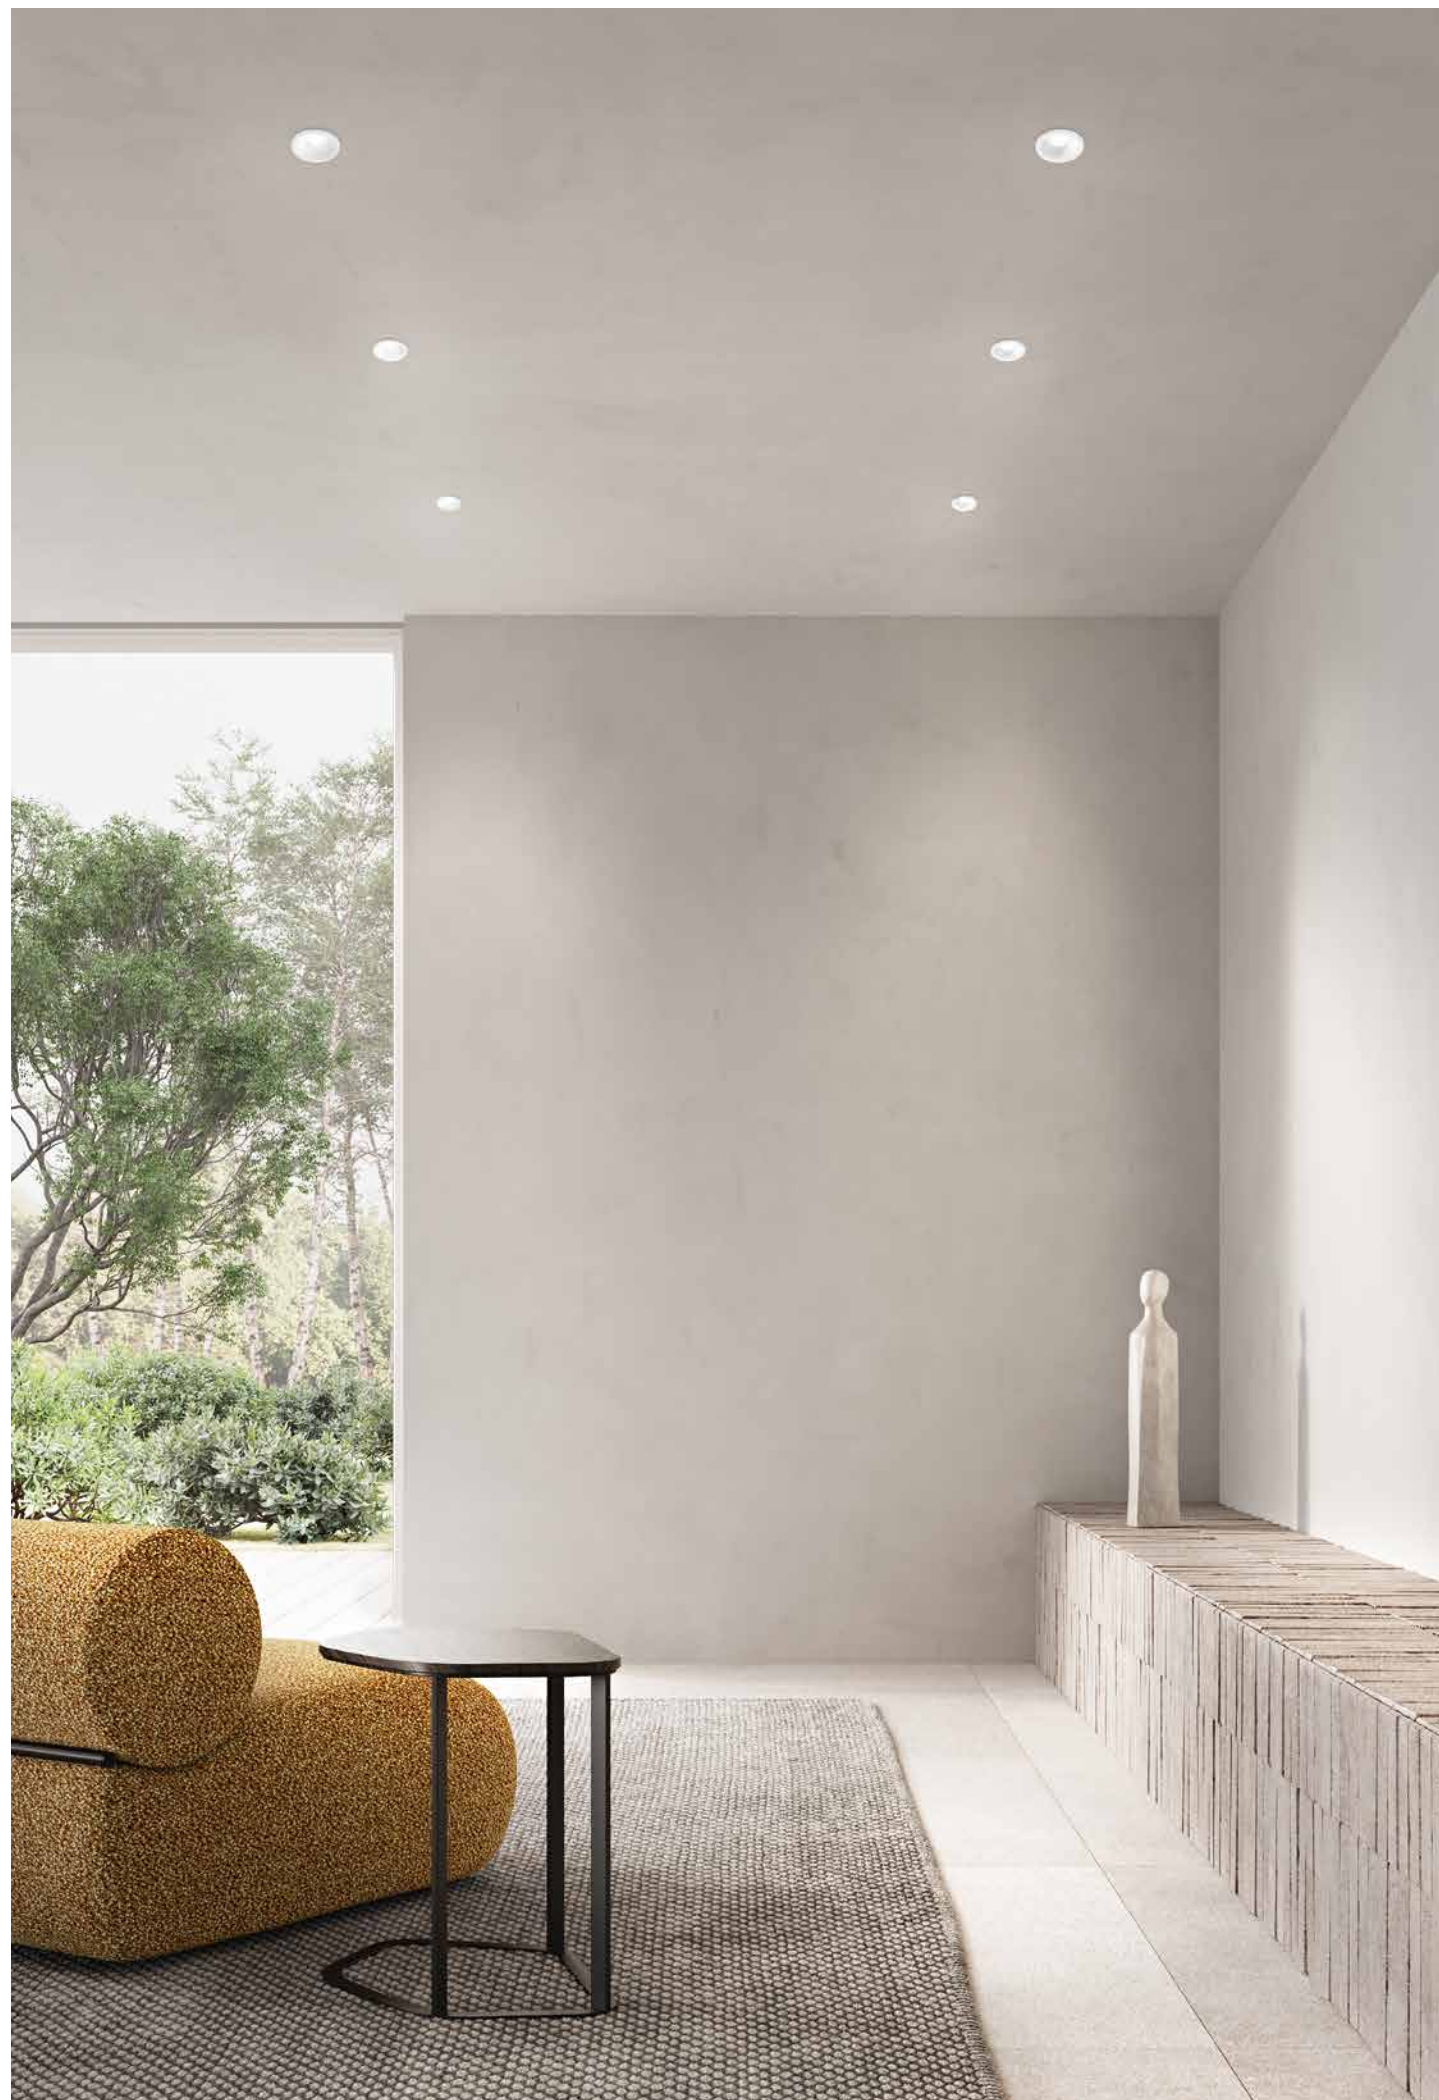


Planet

Faretto GU10 ad incasso, lampada rientrante. Struttura in alluminio. Finitura in bianco opaco e nero opaco.
Recessed GU10 spotlight, recessed lamp. Aluminium structure. Matte white and matte black finish.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight



IP20



Ø 75



0,12 Kg



0,0006 m³

bianco
white

OTF0017B



nero
black

OTF0018N



Ministry

Faretto GU10 ad incasso. Struttura in alluminio. Finitura in bianco opaco.
Recessed GU10 spotlight. Aluminium structure. Matte white finish.



sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included


max power: 1 x 20W
voltage: 220-240Vac

faretto incasso
recessed spotlight

 IP20 Ø 75 0,17 Kg 0,00077 m³

 bianco
white

OTF0036B



Ageha

Faretto GU10 ad incasso. Struttura in alluminio. Finitura in bianco opaco.
Recessed GU10 spotlight. Aluminium structure. Matte white finish.



sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included


max power: 1 x 20W
voltage: 220-240Vac


faretto incasso
recessed spotlight

 IP20 Ø 75 0,13 Kg 0,0006 m³

 bianco
white

OTF0035B



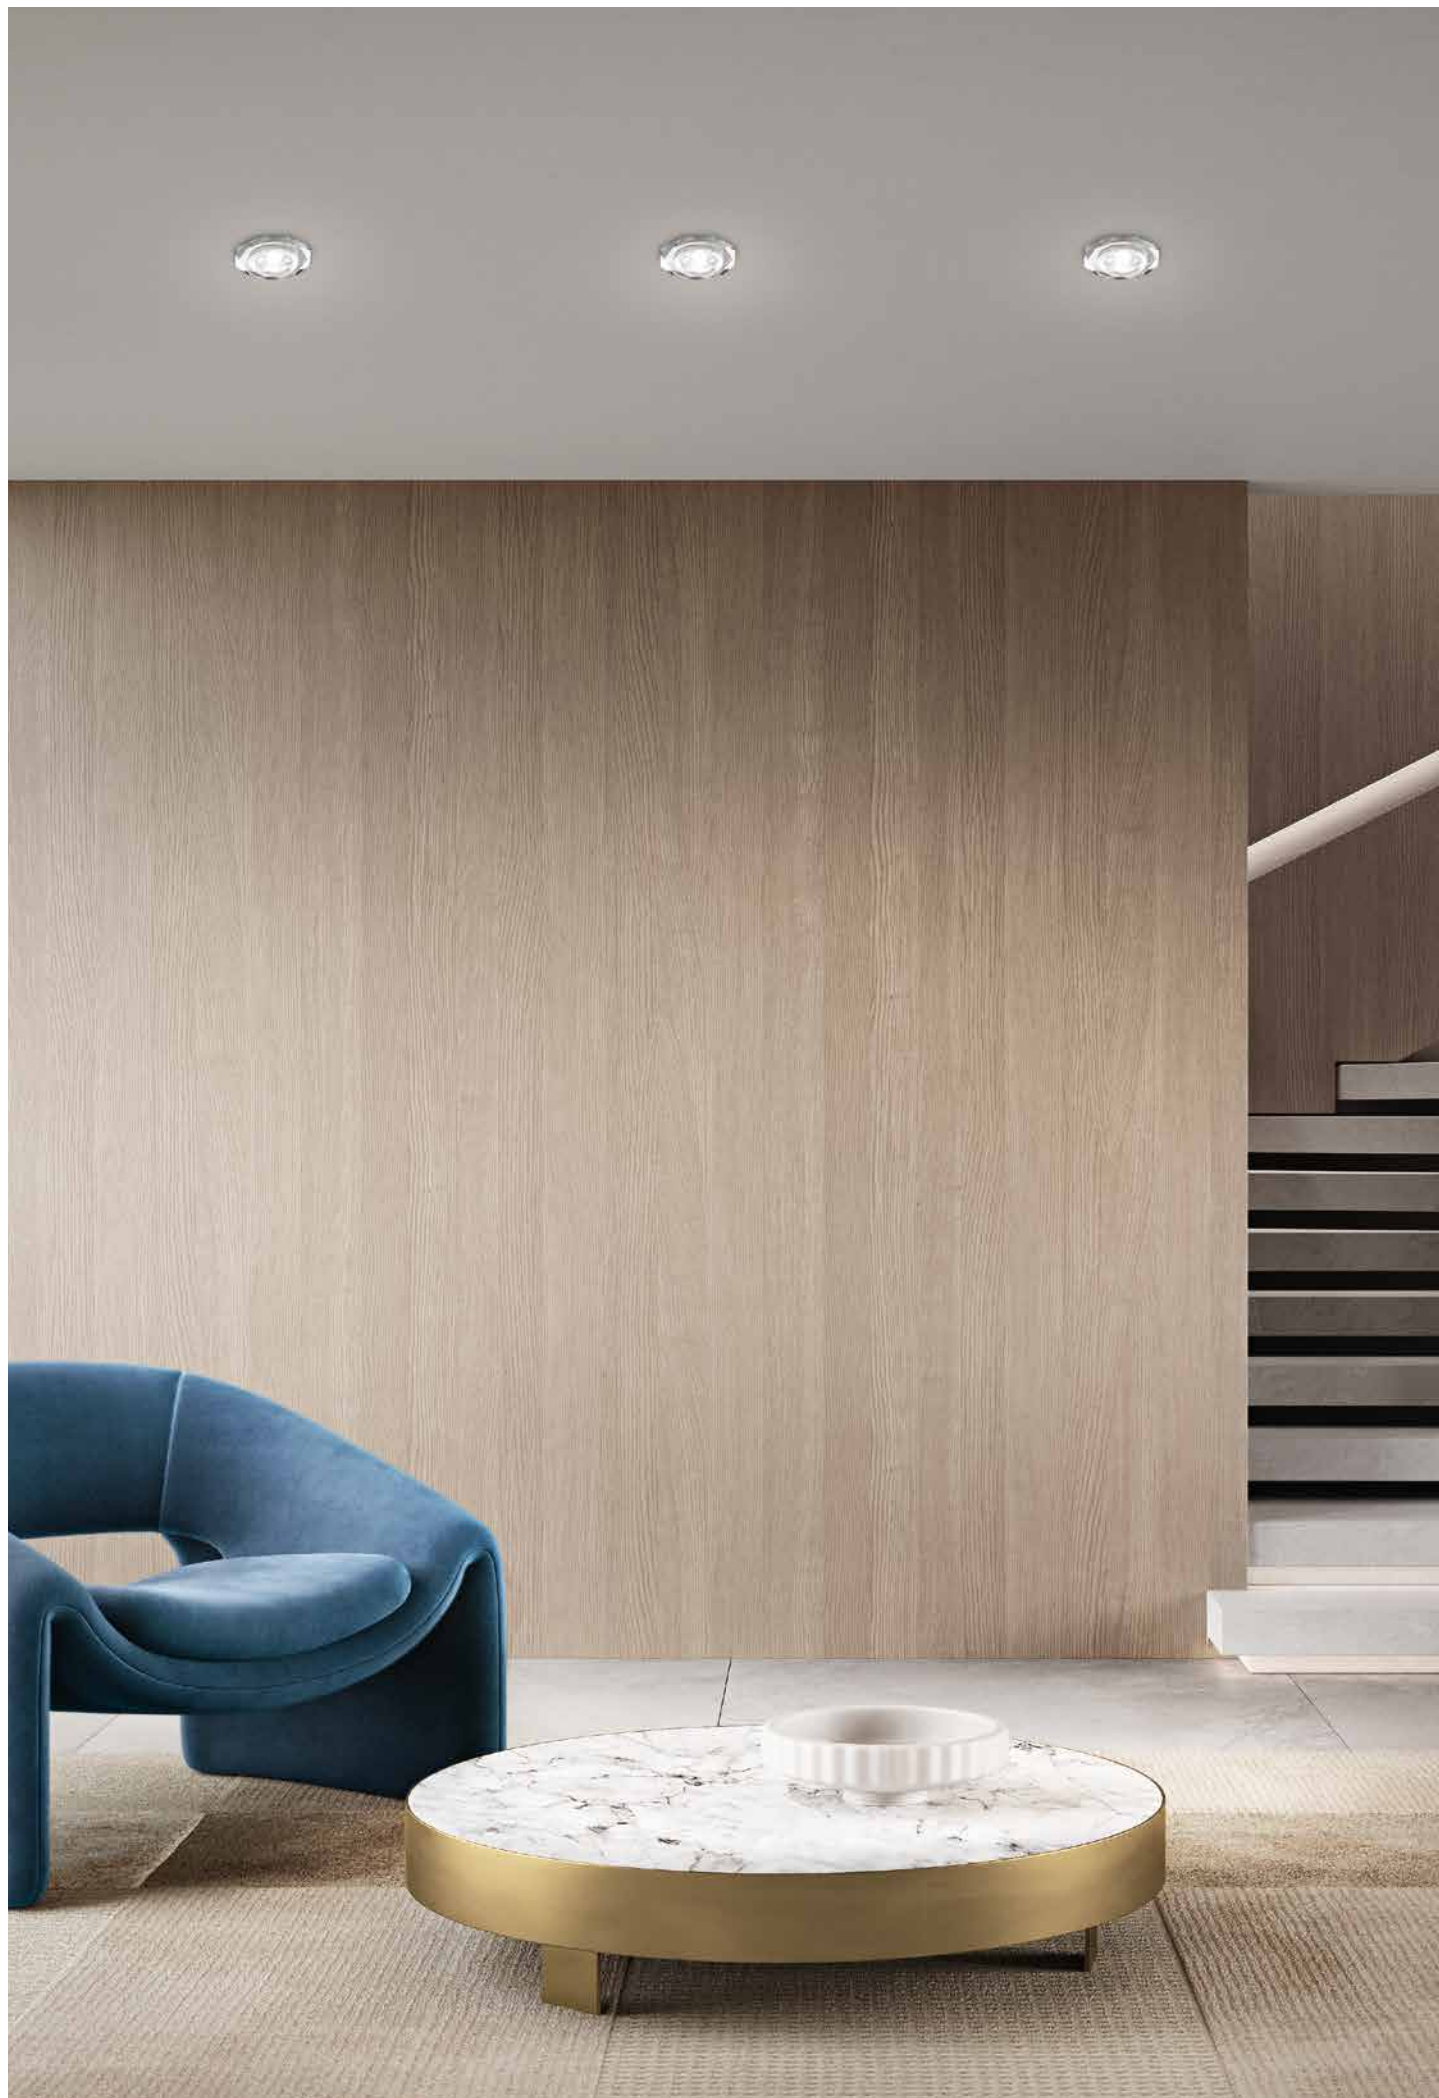


DC10

Faretto GU10 ad incasso.
Struttura in vetro e alluminio.
Recessed GU10 spotlight. Glass and
aluminium structure.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso
recessed spotlight



IP20 Ø 75 0,15 Kg 0,0006 m³

trasparente
transparent

OTF0037





INTERNO INDOOR

Levels


Faretto tondo GU10 ad incasso, orientabile. Struttura in alluminio. Finitura in bianco opaco e nero opaco. Accessorio mascherina quadrata in metallo acquistabile separatamente. Adjustable recessed GU10 round spotlight. Aluminium structure. Matte white and matte black finish. Square metal cover accesory purchased separately.




sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto incasso orientabile
adjustable recessed spotlight




MD

bianco white	nero black	bianco white	nero black
OTF0031B	OTF0032N	OTF0033B	OTF0034N



FARETTI DA INCASSO RECESSED SPOTLIGHTS

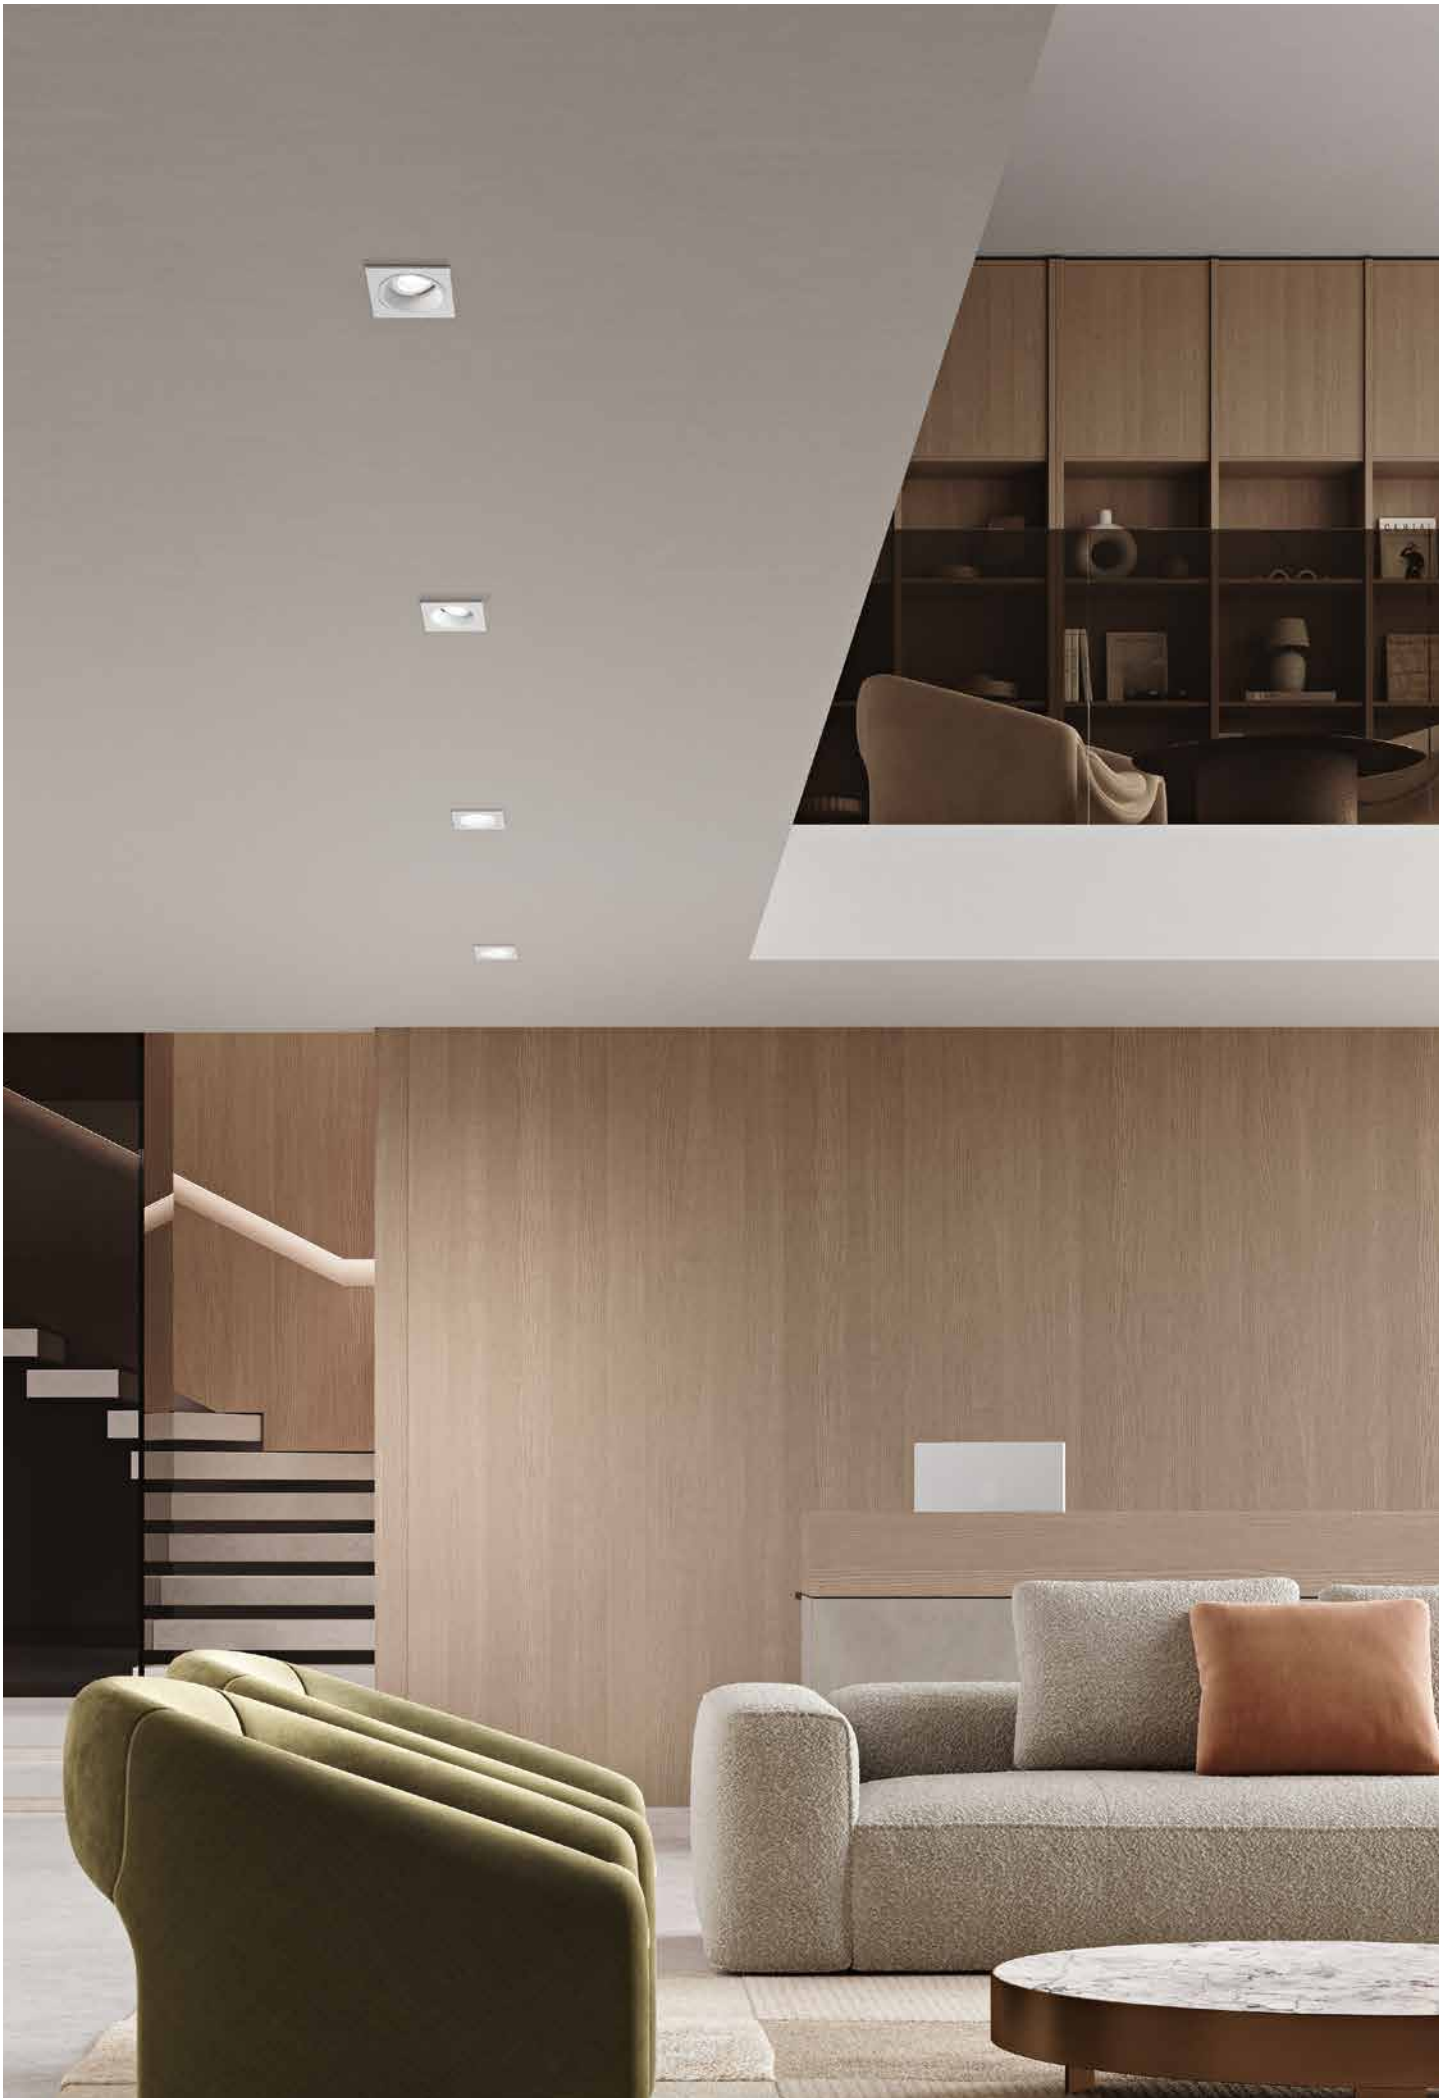

Comb


Faretto tondo GU10 ad incasso, orientabile. Lampada rientrante. Struttura in alluminio. Finitura in bianco opaco e nero opaco. Accessorio mascherina quadrata in metallo acquistabile separatamente. Adjustable recessed GU10 round spotlight. Recessed lamp. Aluminium structure. Matte white and matte black finish. Square metal cover accessory purchased separately.




sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac




faretto incasso orientabile
adjustable recessed spotlight




MD

bianco white	nero black	bianco white	nero black
OTF0029B	OTF0030N	OTF0033B	OTF0034N

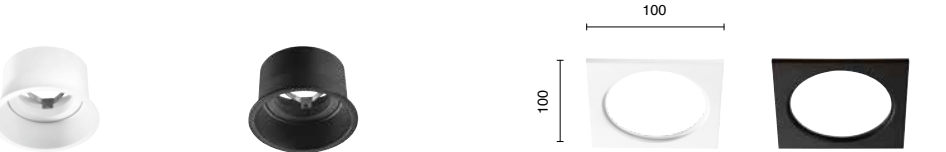

Punk

Faretto GU10 ad incasso, orientabile.
Struttura in zinco. Finitura in bianco opaco
e nero opaco. Lampada rientrante.
Adjustable recessed GU10 spotlight. Zinc
structure. Matte white and matte black
finish. Recessed lamp.

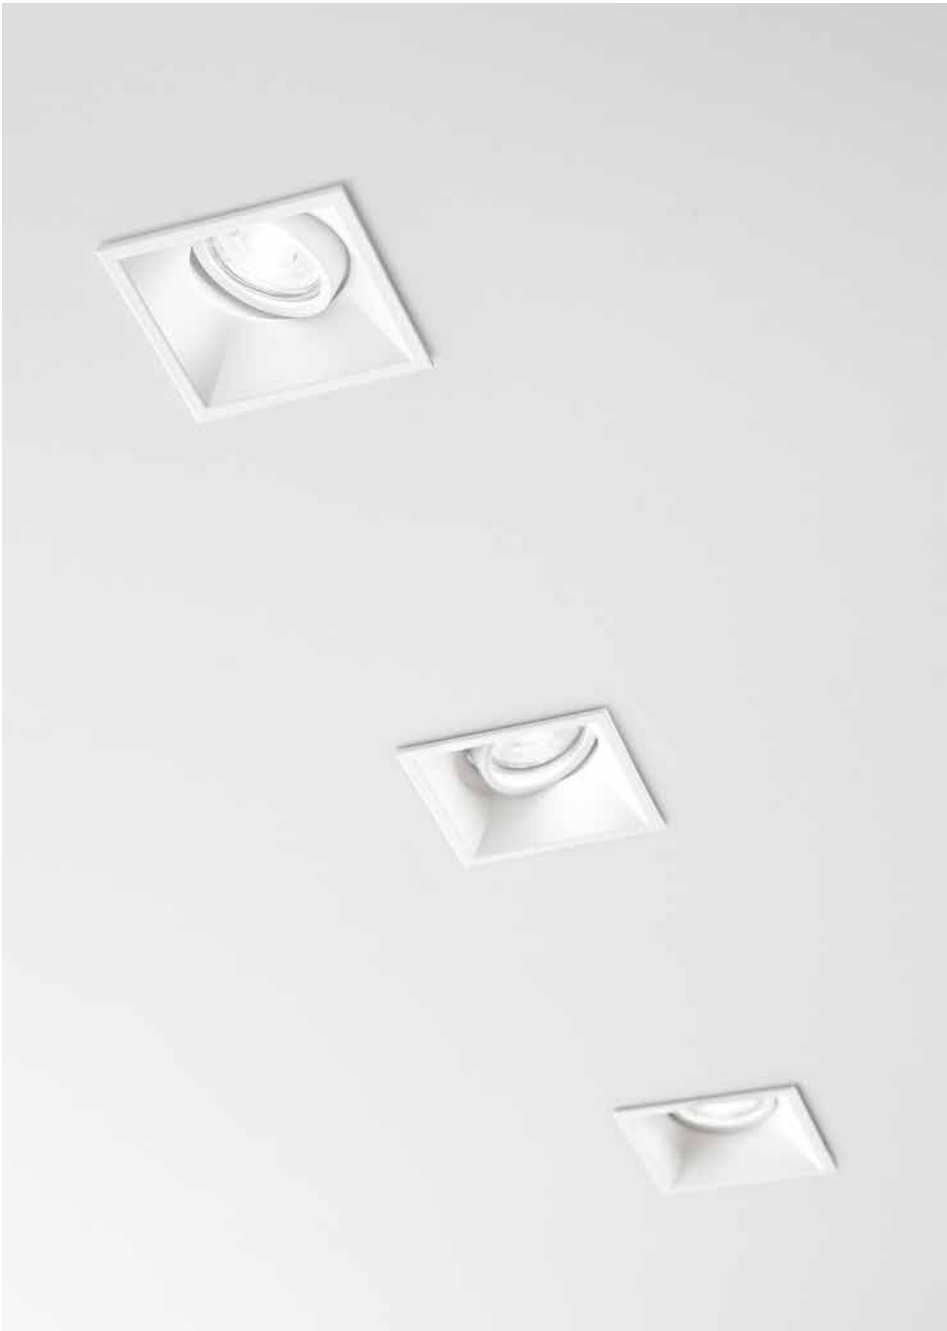

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac

faretto incasso orientabile
adjustable recessed spotlight



IP20



80x80



0,16 Kg




0,00071 m³

bianco
white

OTF108B

nero
black

OTF109N



Fat

Faretto GU10 ad incasso, orientabile.
Struttura in zinco. Finitura in bianco opaco
e nero opaco. Lampada rientrante.
Adjustable recessed GU10 spotlight. Zinc
structure. Matte white and matte black
finish. Recessed lamp.



sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac

faretto incasso orientabile
adjustable recessed spotlight



IP20



Ø 85



0,14 Kg




0,00071 m³

bianco
white

OTF106B

nero
black

OTF107N



Rumba


Faretto da incasso GU10. Struttura in gesso. Verniciabile. Lampada rientrante. GU10 recessed spotlight. Gypsum structure. Paintable. Recessed lamp.




sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



max power: 1 x 20W
voltage: 220-240Vac



faretto da incasso
recessed spotlight

IP20 123x123 0,56 Kg 0,0037 m³

bianco
white

RUMBA/120



faretto da incasso
recessed spotlight

IP20 103x103 0,44 Kg 0,0014 m³

bianco
white

RUMBA/100



Jazz


Faretto da incasso GU10. Struttura in gesso. Verniciabile. Lampada rientrante. GU10 recessed spotlight. Gypsum structure. Paintable. Recessed lamp.





sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



max power: 1 x 20W
voltage: 220-240Vac

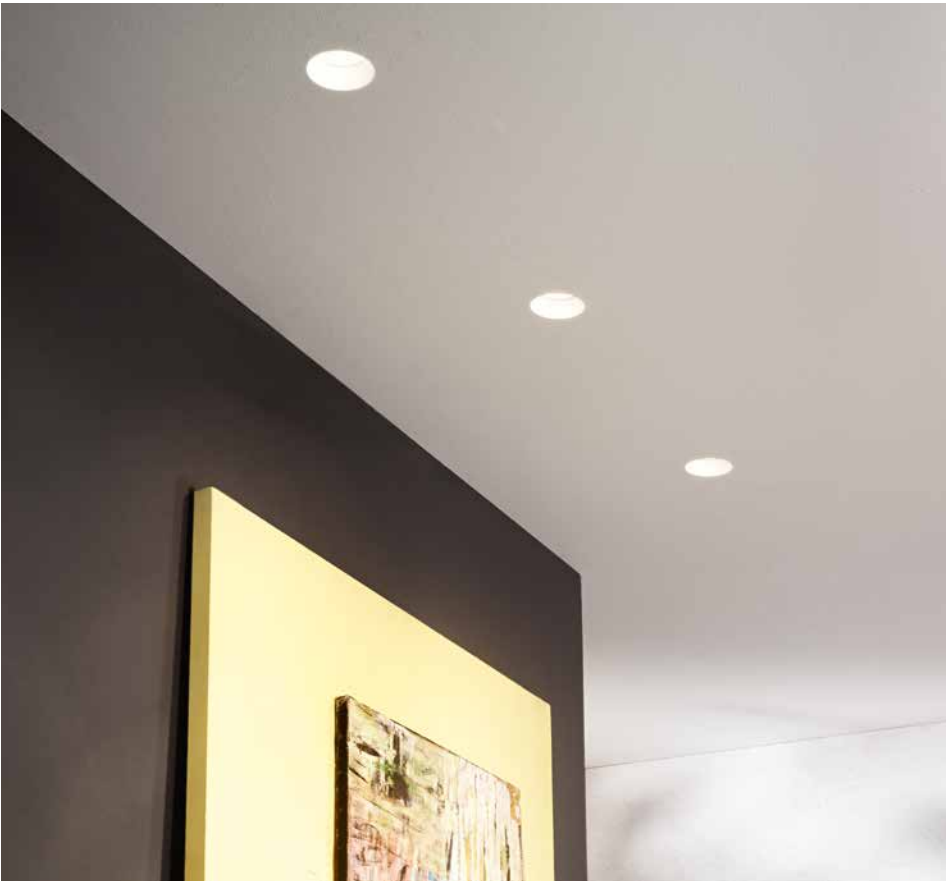

faretto da incasso
recessed spotlight

IP20 Ø 123 0,54 Kg 0,0037 m³

bianco
white

JAZZ/120



faretto da incasso
recessed spotlight

IP20 Ø 103 0,3 Kg 0,0014 m³

bianco
white

JAZZ/100




indoor

Segnapassi

Steplights

Funky

Segnapasso LED da incasso a luce indiretta, in gesso verniciabile.
Indirect light recessed LED steplight, made of paintable gypsum.

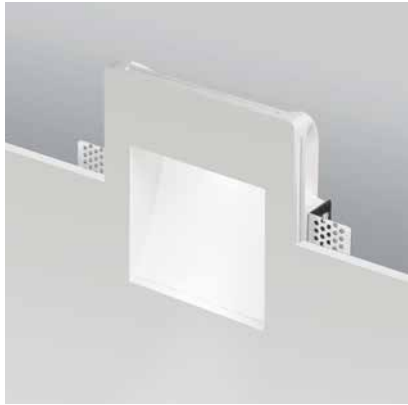

sorgente luminosa
light source
LED

power: 1W
voltage: 220-240Vac

segnapassi
steplight

100°

30.000

IP20

CRI >80

145x173

1,2 Kg


0,005 m³

bianco
white

FUNKY/170


3000K

90LM



Valzer

Segnapasso LED da incasso a luce indiretta, in gesso verniciabile.
Indirect light recessed LED steplight, made of paintable gypsum.

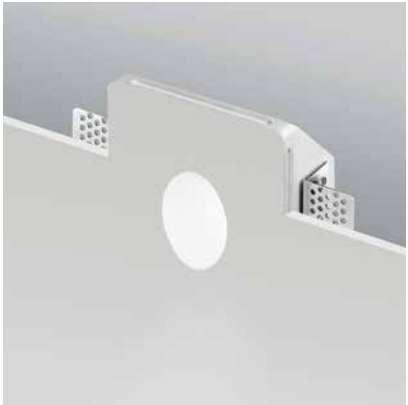

sorgente luminosa
light source
LED

power: 1W
voltage: 220-240Vac

segnapassi
steplight

100°

30.000

IP20

CRI >80

103x103

0,66 Kg


0,0031 m³

bianco
white

VALZER/100

3000K

90LM




Limbo

Segnapasso LED da incasso a luce indiretta, in gesso verniciabile.
Indirect light recessed LED steplight, made of paintable gypsum.



sorgente luminosa
light source
LED

power: **1W**
voltage: **220-240Vac**



segnapassi
steplight

100°

30.000

IP20

CRI >80

103x323

1,46 Kg

0,005 m³

bianco
white

LIMBO/320

3000K

90LM




Liscio

Segnapasso LED da incasso a luce indiretta, in gesso verniciabile.
Indirect light recessed LED steplight, made of paintable gypsum.



sorgente luminosa
light source
LED

power: **1W**
voltage: **220-240Vac**



segnapassi
steplight

100°

30.000

IP20

CRI >80

148x233

1,56 Kg

0,0060 m³

bianco
white

LISCIO/230

3000K


90LM



indoor

Plafoniere e applique

Ceiling and wall lamps

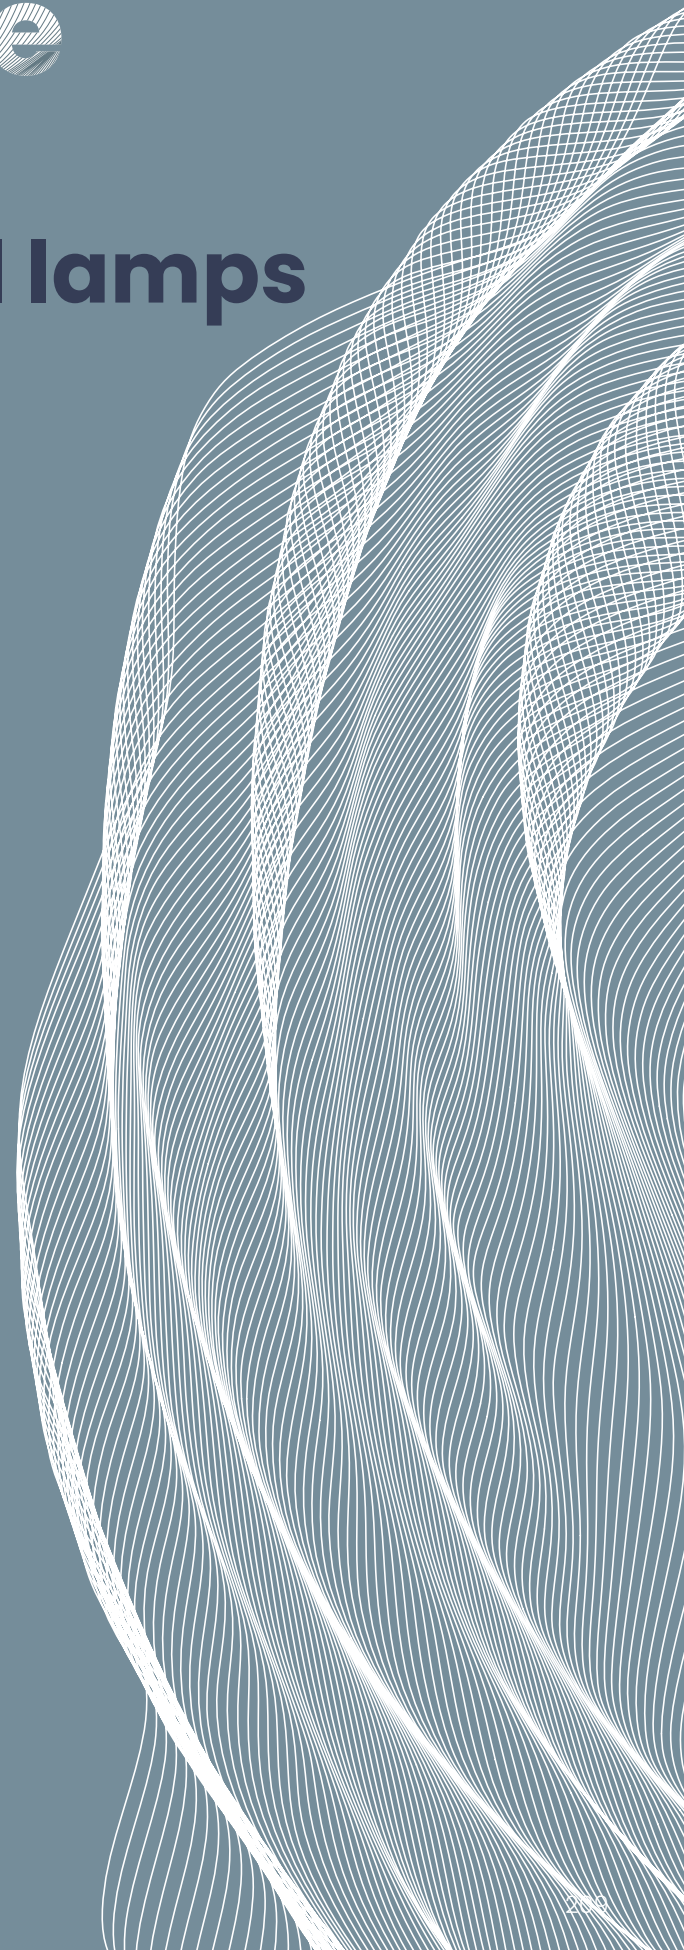




INTERNO INDOOR

Half

Plafoniera LED in alluminio con diffusore in policarbonato. Possibilità di selezionare la temperatura colore (CCT) prima di installare il prodotto. Dimmerabile. Driver incluso.
Aluminium LED ceiling lamp with polycarbonate diffuser. Possible to select the colour temperature (CCT) before installing the product. Dimmable. Driver included.



PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS




 120°	 30.000	 IP20	 UGR <19	 CRI >80	 2,33 Kg	 0,023 m³
bianco white						
OTPL0010B CCT 3000K+4000K 2050LM						

 120°	 30.000	 IP20	 UGR <19	 CRI >80	 5,74 Kg	 0,083 m³
bianco white						
OTPL0011B CCT 3000K+4000K 4229LM						


 120°	 30.000	 IP20	 UGR <19	 CRI >80	 8,48 Kg	 0,162 m³
bianco white						
OTPL0012B CCT 3000K+4000K 5010LM						




sorgente luminosa
light source
LED
power: 25W
voltage: 220-240Vac



sorgente luminosa
light source
LED
power: 48W
voltage: 220-240Vac




sorgente luminosa
light source
LED
power: 60W
voltage: 220-240Vac





Globus

Plafoniera LED in alluminio con diffusore in policarbonato. Possibilità di selezionare la temperatura colore (CCT) prima di installare il prodotto. Dimmerabile. Driver incluso. Kit sospensione disponibile (OTPLKITB-OTPLKITBG-OTPLKITN) acquistabile separatamente.
Aluminium LED ceiling lamp with polycarbonate diffuser. Possible to select the colour temperature (CCT) before installing the product. Dimmable. Driver included. Suspension kit available (OTPLKITB-OTPLKITBG-OTPLKITN) purchased separately.

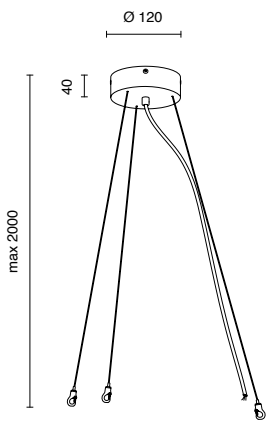

kit sospensione
suspension kit

Il kit di sospensione include: rosone, cavetti regolabili in acciaio e cavo elettrico.
Suspension kit includes: canopy, adjustable steel wires and electric cable.

0,75 Kg 0,0025 m³

bianco white	oro gold	nero black
OTPLKITB	OTPLKITBG	OTPLKITN







Globus

sorgente luminosa
light source
LED


power: **40W**
voltage: **220-240Vac**



power: **60W**
voltage: **220-240Vac**



power: **80W**
voltage: **220-240Vac**



plafoniera
ceiling lamp

110° 30.000 IP20 UGR <19 CRI >80 3,49 Kg 0,054 m³

bianco white	oro gold	nero black
OTPL0001B	OTPL0009BG	OTPL0002N
CCT 3000K+4000K		3410LM



plafoniera
ceiling lamp

110° 30.000 IP20 UGR <19 CRI >80 5,44 Kg 0,092 m³

bianco white	oro gold	nero black
OTPL0003B	OTPL0005BG	OTPL0004N
CCT 3000K+4000K		4920LM



plafoniera
ceiling lamp

110° 30.000 IP20 UGR <19 CRI >80 7,2 Kg 0,14 m³

bianco white	oro gold	nero black
OTPL0006B	OTPL0008BG	OTPL0007N
CCT 3000K+4000K		6420LM



PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS




Boiler


Plafoniera LED in alluminio con diffusore in policarbonato. Possibilità di selezionare la temperatura colore (CCT) prima di installare il prodotto. Dimmerabile. Driver incluso. Kit sospensione (OTKIT01B-OTKIT02N) acquistabile separatamente, disponibile per le misure da 40, 60, 80 cm. Aluminium LED ceiling lamp with polycarbonate diffuser. Possible to select the colour temperature (CCT) before installing the product. Dimmable. Driver included. Suspension kit (OTKIT01B-OTKIT02N) purchased separately, available for sizes 40, 60, 80 cm.

sorgente luminosa
light source
LED

power: 5W
voltage: 220-240Vac



power: 10W
voltage: 220-240Vac



plafoniera ceiling lamp								
		110°	30.000	IP20	UGR <19	CRI >90	0,16 Kg	0,0005 m³
bianco white	nero black							
OTPL0013B	OTPL0014N	CCT 3000K+4000K 409LM						



plafoniera ceiling lamp								
		110°	30.000	IP20	UGR <19	CRI >90	0,25 Kg	0,001 m³
bianco white	nero black							
OTPL0015B	OTPL0016N	CCT 3000K+4000K 820LM						





Boiler

Plafoniera LED in alluminio con diffusore in policarbonato. Possibilità di selezionare la temperatura colore (CCT) prima di installare il prodotto. Dimmerabile. Driver incluso. Kit sospensione (OTKIT01B-OTKIT02N) acquistabile separatamente, disponibile per le misure da 40, 60, 80 cm. Aluminium LED ceiling lamp with polycarbonate diffuser. Possible to select the colour temperature (CCT) before installing the product. Dimmable. Driver included. Suspension kit (OTKIT01B-OTKIT02N) purchased separately, available for sizes 40, 60, 80 cm.



kit sospensione
suspension kit

Il kit di sospensione include: rosone, cavetti regolabili in acciaio e cavo elettrico.
Suspension kit includes: canopy, adjustable steel wires and electric cable.


0,045 Kg 0,0020 m³

bianco
white

nero
black


OTKIT01B

OTKIT02N

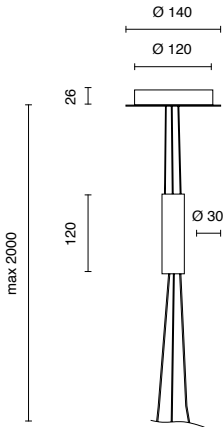


sorgente luminosa
light source
LED


power: 20W
voltage: 220-240Vac




power: 50W
voltage: 220-240Vac



power: 100W
voltage: 220-240Vac



power: 120W
voltage: 220-240Vac



plafoniera
ceiling lamp



bianco
white

nero
black


OTPL0017B

OTPL0018N

CCT 3000K+4000K 1609LM



plafoniera
ceiling lamp



bianco
white

nero
black

OTPL0019B


OTPL0020N

CCT 3000K+4000K 3996LM



disponibile kit sospensione
suspension kit available

plafoniera
ceiling lamp



bianco
white

nero
black

OTPL0023B


OTPL0024N

CCT 3000K+4000K 7980LM



disponibile kit sospensione
suspension kit available

plafoniera
ceiling lamp



bianco
white

nero
black

OTPL0026B

OTPL0025N

CCT 3000K+4000K 9580LM



disponibile kit sospensione
suspension kit available



Baum

Plafoniera LED in alluminio con diffusore in policarbonato. Doppia emissione luminosa. Driver incluso.
Aluminium LED ceiling lamp with polycarbonate diffuser. Double light emission. Driver included.



plafoniera biemissione
double emission ceiling lamp



110°



30.000



IP20



UGR <19



CRI >90



0,16 Kg



0,0007 m³

bianco
white

nero
black

OTPL0027BL

OTPL0027NL

3000K

720LM



110°



30.000



IP20



UGR <19



CRI >90



0,3 Kg



0,001 m³

bianco
white

nero
black

OTPL0028BL

OTPL0028NL

3000K

1360LM



110°



30.000



IP20



UGR <19



CRI >90



0,43 Kg



0,0018 m³

bianco
white

nero
black

OTPL0029BL

OTPL0029NL

3000K


1970LM



sorgente luminosa
light source

LED


power: 6+3W
voltage: 220-240Vac



sorgente luminosa
light source

LED


power: 12+3W
voltage: 220-240Vac



sorgente luminosa
light source

LED

power: 18+6W
voltage: 220-240Vac



Aloa ceiling

Struttura in alluminio verniciato a polvere disponibile in diversi colori.
Aluminium structure, powder coated, available in different colours.


Sospensione disponibile a p. 263
Suspension available p. 263

INTERNO INDOOR



sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto
spotlight

IP200,43 Kg0,0026 m³

bianco
white

oro
gold

nero
black

PL.ALOA/B.CO

PL.ALOA/ORO

PL.ALOA/NERO



Per codici METEL vedere listino See the price list for METEL codes

Filo ceiling


Struttura in alluminio verniciato a polvere disponibile in diversi colori.
Aluminium structure, powder coated, available in different colours.

Sospensione disponibile a p. 262
Suspension available p. 262



sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto
spotlight

IP200,38 Kg0,0026 m³

bianco
white

oro
gold

nero
black

PL.FILO/B.CO

PL.FILO/ORO

PL.FILO/NERO



Per codici METEL vedere listino See the price list for METEL codes

PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS




Rock ceiling

Faretto da soffitto in cemento.
Disponibile in diversi colori.
Concrete ceiling spotlight.
Available in different colours.

sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



faretto
spotlight

IP20 0,02 Kg 0,0016 m³

bianco white	rosso red	cemento concrete
PL.ROCK/BIANCO	PL.ROCK/ROSSO	PL.ROCK/CEMENTO



Per codici METEL vedere listino See the price list for METEL codes




Milo

Applique a LED orientabile in alluminio.
Diffusore in policarbonato.
Driver incluso.
Aluminium adjustable LED wall lamp.
Polycarbonate diffuser.
Driver included.

sorgente luminosa
light source
LED

max power: 12W
voltage: 220-240Vac

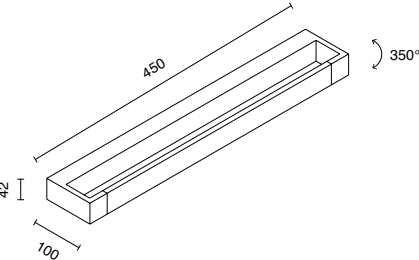

applique orientabile adjustable wall lamp								
		120° / 350°	30.000	IP20	UGR <19	CRI >90	1 Kg	0,002 m³
bianco white								
AP.MILO/BIANCO		nero black		AP.MILO/NERO		3000K 1104LM		



INTERNO INDOOR




Sasha

Applique a LED in alluminio a doppia
emissione. Diffusore in policarbonato.
Driver incluso.
Aluminium LED double emission wall
lamp. Polycarbonate diffuser.
Driver included.


sorgente luminosa
light source
LED

max power: 14W
voltage: 220-240Vac



PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS

applique biemissione
double emission wall lamp



bianco white	nero black		
AP.SASHA/BIANCO	AP.SASHA/NERO	3000K	1320LM



Per codici METEL vedere listino See the price list for METEL codes




INTERNO INDOOR

Agos


Applique a LED orientabile in alluminio.
Diffusore in policarbonato. Driver incluso.
Dimmerabile.
Aluminium adjustable LED wall lamp.
Polycarbonate diffuser. Driver included.
Dimmable.

sorgente luminosa
light source
LED

power: 12W
voltage: 220-240Vac



power: 20W
voltage: 220-240Vac

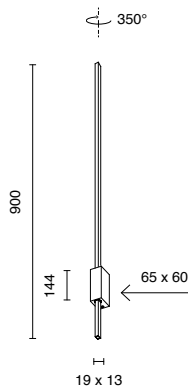

PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS

applique orientabile
adjustable wall lamp

	110°	30.000	IP20	UGR <19	CRI >80	0,86 Kg	0,009 m³
bianco white							
OTAP0001B							
	nero black						
	OTAP0002N					3000K	860LM

applique orientabile
adjustable wall lamp

	110°	30.000	IP20	UGR <19	CRI >80	1,05 Kg	0,014 m³
bianco white							
OTAP0003B							
	nero black						
	OTAP0004N					3000K	1496LM

Fog


Struttura in alluminio verniciato a polvere disponibile in diversi colori.
Aluminium structure, powder coated, available in different colours.

Le lampadine presenti nell'immagine non sono incluse.
The light bulbs in the image are not included.



sorgente luminosa
light source
E27
lampadine non incluse
light bulbs not included

max power: 1 x 50W
voltage: 220-240Vac



faretto
spotlight

IP20 0,35 Kg 0,002 m³

bianco white	corten corten	oro gold	nero black
PL.FOG/BIANCO	PL.FOG/CORTEN	PL.FOG/ORO	PL.FOG/NERO



Per codici METEL vedere listino See the price list for METEL codes

Bow


Struttura in alluminio verniciato a polvere disponibile in diversi colori.
Aluminium structure, powder coated, available in different colours.

Le lampadine presenti nell'immagine non sono incluse.
The light bulbs in the image are not included.



sorgente luminosa
light source
E27
lampadine non incluse
light bulbs not included

max power: 1 x 50W
voltage: 220-240Vac



faretto
spotlight

IP20 0,4 Kg 0,002 m³

bianco white	corten corten	oro gold	nero black
PL.BOW/BIANCO	PL.BOW/CORTEN	PL.BOW/ORO	PL.BOW/NERO



Per codici METEL vedere listino See the price list for METEL codes



Stan


Applique a LED in metallo verniciato.
Disponibile in diversi colori. Presa USB.
Tasti per doppia accensione integrati.
LED wall lamp in painted metal.
Available in different colours. Integrated
dual power buttons. USB socket.



sorgente luminosa
light source

LED

power: 4,5W + 3W
voltage: 220-240Vac



applique
wall lamp



180° + 60°



20.000



IP20



CRI >80



1 Kg



0,0063 m³

bianco
white

nero
black

AP.STAN/BIANCO

AP.STAN/NERO

3000K

560LM



Per codici METEL vedere listino See the price list for METEL codes




Shadow

Applique in metallo con paralume più spot a LED orientabile. Tasti per doppia accensione integrati.
Metal wall lamp with lampshade plus adjustable LED spotlight. Integrated dual power buttons.



sorgente luminosa
light source
LED + E27
lampadine non incluse
light bulbs not included
power: 1 x E27 (max 20W) + 3W LED
voltage: 220-240Vac



applique
wall lamp

60°

20.000

IP20

CRI >80

1 Kg

0,01 m³

bianco
white

nero
black

AP.SHADOW/BIANCO

AP.SHADOW/NERO





Flat

Applique in metallo con retroilluminazione LED e spot LED orientabile. Caricatore wireless (compatibile solo con sistema operativo IOS), ricarica USB per cellulare. Tasti per doppia accensione integrati.
Metal wall lamp with LED backlight and adjustable LED spotlight. Wireless charger (only compatible with IOS operating system), USB charging for mobile phone. Integrated dual power buttons.



sorgente luminosa
light source
LED

power: 6W + 3W
voltage: 220-240Vac

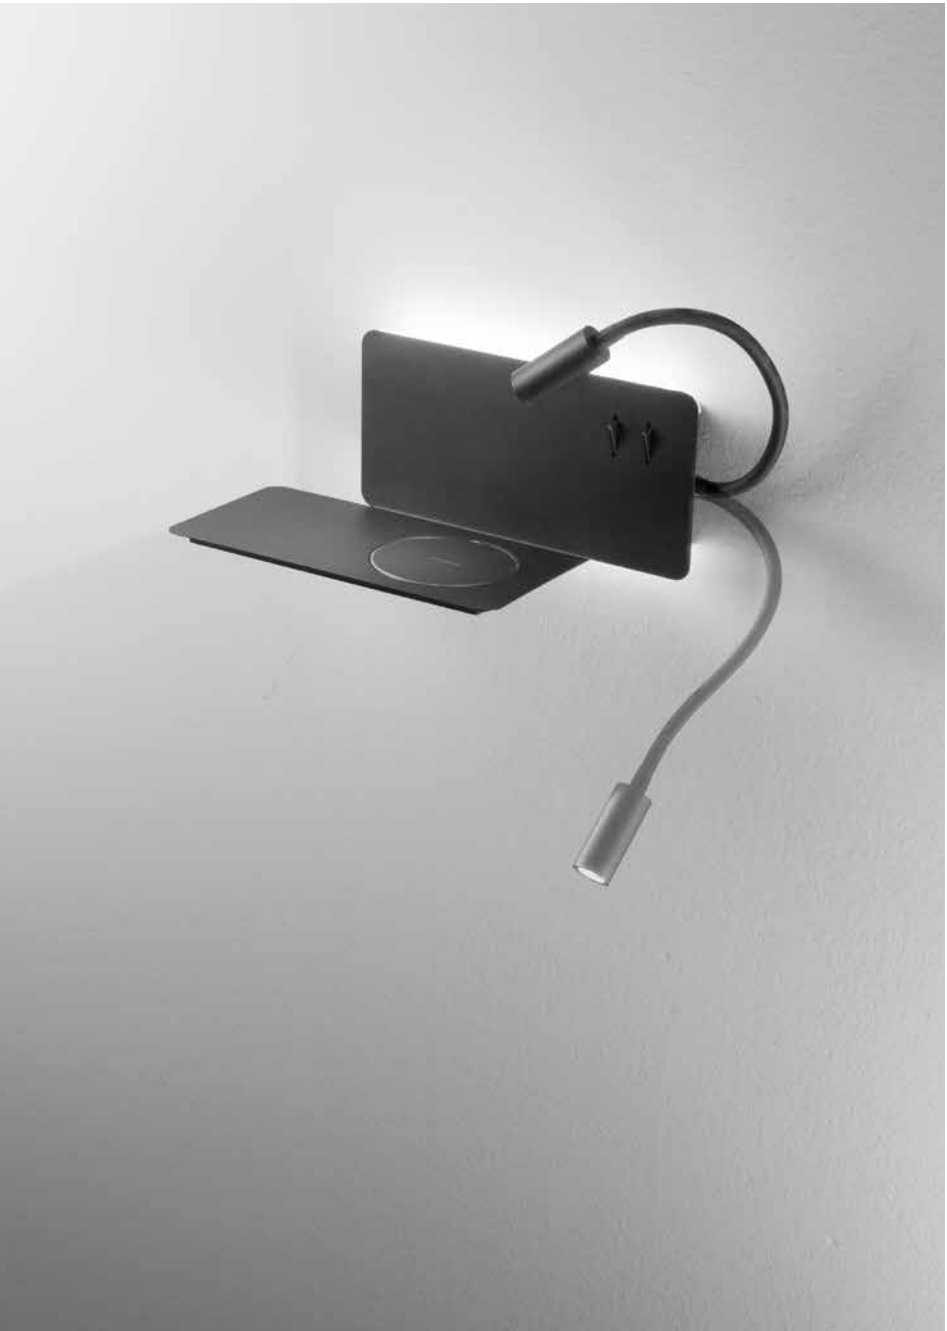

applique
wall lamp

180° + 60°

20.000

IP20

CRI >80

1,85 Kg

0,011 m³

bianco
white

nero
black

DX AP.FLAT/D-BIANCO	DX AP.FLAT/D-NERO	3000K	790LM
SX AP.FLAT/S-BIANCO	SX AP.FLAT/S-NERO	3000K	790LM




Sella

Applique LED in metallo con retroilluminazione e spot orientabile. Tasti per doppia accensione integrati. Metal LED wall lamp with backlight and adjustable spotlight. Integrated dual power buttons.




sorgente luminosa
light source
LED

power: 6W + 3W
voltage: 220-240Vac



power: 6W + 3W
voltage: 220-240Vac



applique wall lamp							
		360° + 60°	20.000	IP20	CRI >80	0,55 Kg	0,0014 m³
bianco white	nero black						
AP.SELLA/CR-BIANCO	AP.SELLA/CR-NERO						
applique wall lamp							
		360° + 60°	20.000	IP20	CRI >80	0,55 Kg	0,0014 m³
bianco white	nero black						
AP.SELLA/SQ-BIANCO	AP.SELLA/SQ-NERO						




Telescope

Applique in metallo con sorgente luminosa direzionale a LED e con presa USB. Tasto accensione integrato.
Metal wall lamp with directional LED light source and USB socket. Integrated power button.



sorgente luminosa
light source
LED

power: 3W
voltage: 220-240Vac




applique wall lamp								
		60°	20.000	IP20	CRI >80	0,5 Kg	0,001 m³	
bianco white		nero black						
AP.TElescope/B.CO		AP.TElescope/NERO		3000K	270LM			






Plate

Applique LED in metallo retroilluminato con faretto orientabile. Tasti per doppia accensione integrati.
Backlit metal LED wall lamp with adjustable spotlight. Integrated dual power buttons.



sorgente luminosa
light source
LED

power: 5W + 3W
voltage: 220-240Vac



applique wall lamp							
		360° + 60°	20.000	IP20	CRI >80	0,78 Kg	0,0027 m³
bianco white							
AP.PLATE/BIANCO		nero black					
		AP.PLATE/NERO		3000K	560LM		






Fall

Applique in metallo con LED
direzionale da 3W. Tasto accensione
integrato.
Metal wall lamp with 3W directional LED.
Integrated power button.



sorgente luminosa
light source
LED

power: 3W
voltage: 220-240Vac



applique wall lamp							
bianco white		60°	20.000	IP20	CRI >80	0,38 Kg	0,0017 m³
AP.FALL/BIANCO		nero black		3000K		270LM	
AP.FALL/NERO							



indoor

Minimal Minimal




Tube

Collezione in metallo con fonte luminosa LED. Cavetti regolabili in lunghezza. Colori disponibili: bianco, tortora, nero.
Collection in metal with LED light source. Length adjustable cables. Available colours: white, dove gray, black.

sorgente luminosa
light source
LED

power: 5W
voltage: 220-240Vac



sospensione suspension							
		120°	30.000	IP50	CRI >80	0,91 Kg	0,0071 m³
bianco con filo bianco white with white wire		tortora con filo trasparente dove gray with transparent wire	nero con filo nero black with black wire				
SO.TUBE/60-BCO		SO.TUBE/60-TORTORA	SO.TUBE/60-NERO				
3000K		365LM					
							

Per codici METEL vedere listino See the price list for METEL codes




Exagon

Collezione in metallo con fonte luminosa LED. Cavetti regolabili in lunghezza. Colori disponibili: bianco, nero.
Collection in metal with LED light source. Length adjustable cables. Available colours: white, black.

sorgente luminosa
light source
LED

power: 5W
voltage: 220-240Vac



sospensione suspension							
bianco con filo bianco white with white wire	nero con filo nero black with black wire						
SO.EXAGON/80-BCO	SO.EXAGON/80-NERO					3000K	365LM


Lilium

Struttura in alluminio verniciato a polvere. Compatibile con le nostre basi per soffitto ed accessori fermacavo che consentono di creare soluzioni personalizzate consultabili nel catalogo ONDALUCE. Cavetto regolabile in lunghezza.
Powder-coated aluminium structure. Compatible with our ceiling bases and cable clamp accessories to create customised solutions, which can be consulted in the ONDALUCE catalog. Length-adjustable cable.




sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



sospensione
suspension



IP20 0,69 Kg 0,004 m³

oro con filo trasparente
gold with transparent wire

SO.LILIUM/ORO

nero con filo nero
black with black wire

SO.LILIUM/NERO



Lila


Struttura in alluminio verniciato a polvere. Compatibile con le nostre basi per soffitto ed accessori fermacavo che consentono di creare soluzioni personalizzate consultabili nel catalogo ONDALUCE. Cavetto regolabile in lunghezza.
Powder-coated aluminium structure. Compatible with our ceiling bases and cable clamp accessories to create customised solutions, which can be consulted in the ONDALUCE catalog. Length-adjustable cable.




sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included


max power: 1 x 20W
voltage: 220-240Vac



max power: 1 x 20W
voltage: 220-240Vac



sospensione
suspension



IP20 0,68 Kg 0,004 m³

bianco con filo trasparente
white with transparent wire

SO.LILA/PC-BIANCO

oro con filo trasparente
gold with transparent wire


SO.LILA/PC-ORO

nero con filo nero
black with black wire

SO.LILA/PC-NERO



sospensione
suspension



IP20 0,9 Kg 0,007 m³

bianco con filo trasparente
white with transparent wire

SO.LILA/GR-BIANCO

oro con filo trasparente
gold with transparent wire

SO.LILA/GR-ORO

nero con filo nero
black with black wire

SO.LILA/GR-NERO






Noa

Struttura in alluminio verniciato a polvere di colore bianco, oro o nero. Compatibile con le nostre basi per soffitto ed accessori fermacavo che consentono di creare soluzioni personalizzate consultabili nel catalogo ONDALUCE. Cavetti regolabili in lunghezza.
Powder-coated aluminium structure in white, gold or black. Compatible with our ceiling bases and cable clamp accessories to create customised solutions, which can be consulted in the ONDALUCE catalog. Length adjustable cables.


sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



max power: 1 x 20W
voltage: 220-240Vac



sospensione
suspension



IP20 0,75 Kg 0,003 m³

bianco con filo bianco
white with white wire

SO.NOA/50-BIANCO



oro con filo oro
gold with gold wire

SO.NOA/50-ORO



nero con filo nero
black with black wire

SO.NOA/50-NERO



sospensione
suspension



IP20 0,5 Kg 0,002 m³

bianco con filo bianco
white with white wire

SO.NOA/25-BIANCO



oro con filo oro
gold with gold wire

SO.NOA/25-ORO



nero con filo nero
black with black wire

SO.NOA/25-NERO



INTERNO INDOOR


Powder-coated aluminium structure in white, gold or black. Compatible with our ceiling bases and cable clamp accessories to create customised solutions, which can be consulted in the ONDALUCE catalog. Adjustable cables.

Faretto disponibile a p. 225
Spotlight available p. 225




GU10
lampadine non incluse
light bulbs not included

max power: 1 x 20W
voltage: 220-240Vac



max power: 1 x 20W
voltage: 220-240Vac



The diagram shows a vertical rod with a light source at the bottom, emitting a yellow cone of light. To the right, a circular inset shows a cross-section of the rod, with a vertical line in the center and horizontal lines on either side, representing the internal structure or a specific measurement.







IP20 **1 Kg** **0,0069 m³**

		
bianco con filo nero white with black wire SO.FILO/GR-B.CO 	oro con filo nero gold with black wire SO.FILO/GR-ORO 	nero con filo nero black with black wire SO.FILO/GR-NERO 





IP20 **0,825 Kg** **0,005 m³**


		
bianco con filo nero white with black wire SO.FILO/PC-B.CO 	oro con filo nero gold with black wire SO.FILO/PC-ORO 	nero con filo nero black with black wire SO.FILO/PC-NERO 

Per codici METEL vedere listino See the price list for METEL codes

MINIMAL MINIMAL

Powder-coated aluminium structure in white, gold or black. Compatible with our ceiling bases and cable clamp accessories to create customised solutions, which can be consulted in the ONDALUCE catalog. Adjustable cables.

Faretto disponibile a p. 224
Spotlight available p. 224

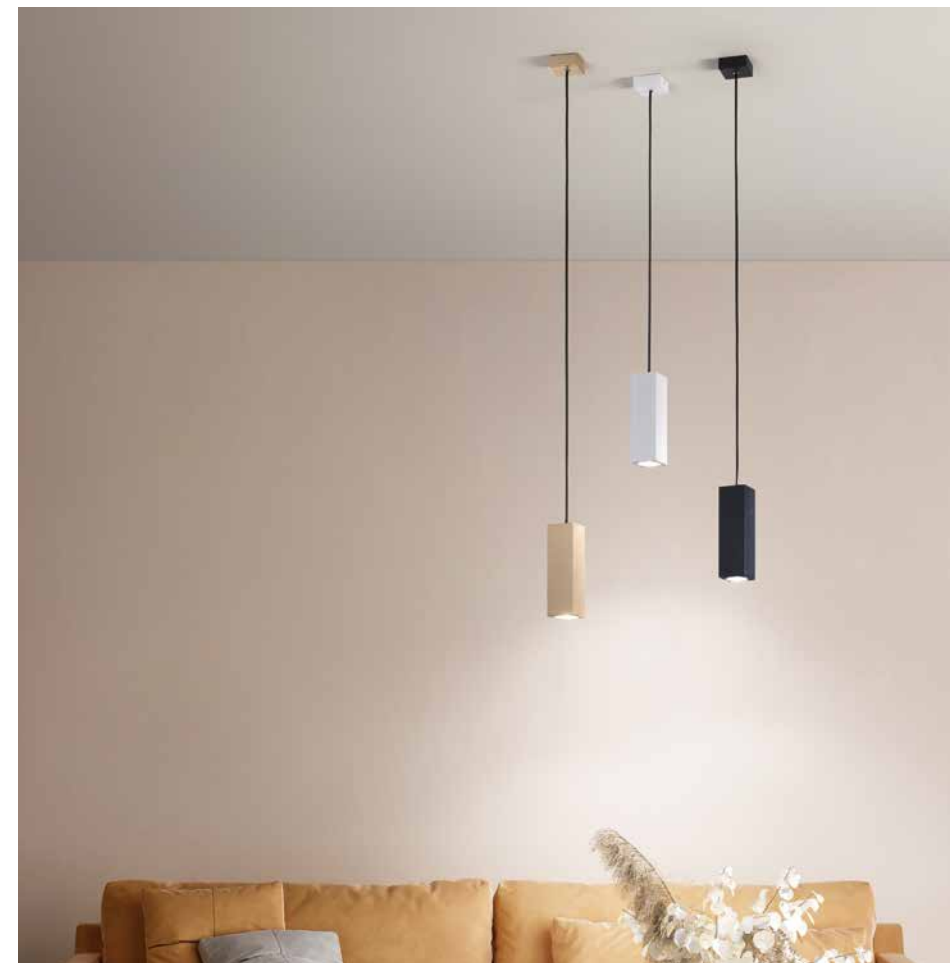





IP20 1,218 Kg 0,0069 m³

bianco con filo nero white with black wire SO.ALOA/GR-B.CO 	oro con filo nero gold with black wire SO.ALOA/GR-ORO 	nero con filo nero black with black wire SO.ALOA/GR-NERO 





IP20 **0,825 Kg** **0,0043 m³**

		
bianco con filo nero white with black wire	oro con filo nero gold with black wire	nero con filo nero black with black wire
SO.ALOA/PC-B.CO	SO.ALOA/PC-ORO	SO.ALOA/PC-NERO
		

Per codici METEL vedere listino See the price list for METEL codes

outdoor

Paletti
Bollards


Nature

Paletto LED in alluminio con diffusore in vetro. Driver incluso.
Aluminium LED bollard with glass diffuser. Driver included.



sorgente luminosa
light source
LED

power: 12W
voltage: 220-240Vac



paletto bollard



120°



20.000



IP65



UGR <19



CRI >80



1,28 Kg



0,08 m³

corten
corten

nero
black

OTPLT400C

OTPLT400N


4000K

698LM



sorgente luminosa
light source
LED

power: 12W
voltage: 220-240Vac



paletto bollard



120°



20.000



IP65



UGR <19



CRI >80



1,56 KG



0,1 m³

corten
corten

nero
black

OTPLT600C

OTPLT600N


4000K

698LM



sorgente luminosa
light source
LED

power: 12W
voltage: 220-240Vac



paletto bollard



120°



20.000



IP65



UGR <19



CRI >80



1,8 Kg



0,12 m³

corten
corten

nero
black

OTPLT800C

OTPLT800N

4000K

698LM








Viale

Paletto LED in alluminio con diffusore in policarbonato. Driver incluso.
Aluminium LED bollard with polycarbonate diffuser. Driver included.


sorgente luminosa
light source

LED

power: 12W
voltage: 220-240Vac



power: 12W
voltage: 220-240Vac



PALETTI BOLLARDS

paletto
bollard



120°



20.000



IP65



UGR <19



CRI >80



1,58 Kg



0,16 m³

corten
corten

nero
black

OTPLT801C

OTPLT801N

4000K

720LM

paletto
bollard



120°



20.000



IP65



UGR <19



CRI >80



1,28 Kg



0,16m³

corten
corten

nero
black

OTPLT601C

OTPLT601N

4000K

720LM


Lucifer

Paletto LED in alluminio con diffusore in vetro. Driver incluso.
Aluminium LED bollard with glass diffuser.
Driver included.




sorgente luminosa
light source
LED

power: 12W
voltage: 220-240Vac



power: 12W
voltage: 220-240Vac

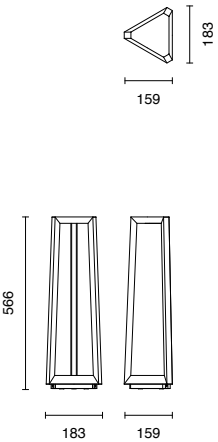

paletto bollard

120° 30.000 IP65 UGR <19 CRI >80 1,66 KG 0,11 m³

corten antracite

OTPLT802C OTPLT802G 4000K 780LM

paletto bollard

120° 30.000 IP65 UGR <19 CRI >80 1,44 Kg 0,09 m³

corten antracite

OTPLT550C OTPLT550G 4000K 780LM






Raissa


Paletto LED in alluminio con diffusore in policarbonato. Includi due basi di ancoraggio: con picchetto e con base piatta. Driver incluso.

Aluminium LED bollard with polycarbonate diffuser. Two anchor bases included: with stake and with flat base. Driver included.

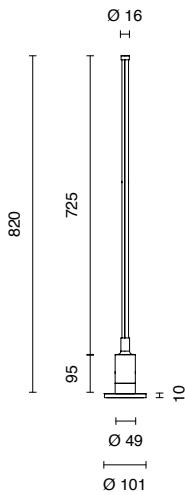

sorgente luminosa
light source
LED

power: 10W
voltage: 220-240Vac



paletto
bollard



120°

30.000

IP54

UGR <19

CRI >90

1,5 Kg

0,002 m³

corten
corten

antracite
anthracite

OTPLT805C

OTPLT805G

4000K 1090LM






ESTERNO OUTDOOR

Mirta

Lampada da terra LED da esterno.
Struttura in alluminio e diffusore in vetro.
COB Bridgelux. Driver incluso.
Outdoor LED floor lamp. Aluminium structure
and glass diffuser. Bridgelux COB.
Driver included.

sorgente luminosa
light source
LED

power: 5W
voltage: 220-240Vac



PALETTI BOLLARDS

paletto bollard								
		120°	30.000	IP54	UGR < 19	CRI > 90	1,2 Kg	0,016 m³
corten corten		antracite anthracite						
OTPLT806C		OTPLT806G		4000K		425LM		




Grass single

Paletto LED in alluminio con diffusore in vetro. Installazione a picchetto. Driver incluso.
Aluminium LED bollard with glass diffuser. Stake installation. Driver included.



sorgente luminosa
light source
LED

power: **6W**
voltage: **220-240Vac**



paletto bollard

70°

30.000

IP65

UGR <19

CRI >80

0,6 Kg

0,005 m³

corten
corten

OTPLT803C

nero
black

OTPLT803N

4000K

650LM


Grass double

Paletto LED in alluminio con diffusore in vetro. Installazione con base. Driver incluso.
Aluminium LED bollard with glass diffuser. Installation with base. Driver included.



sorgente luminosa
light source
LED

power: **12W**
voltage: **220-240Vac**

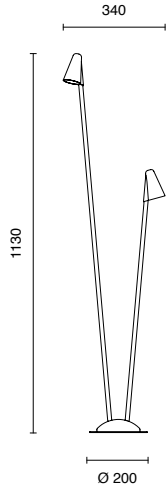

paletto bollard

70°

30.000

IP65

UGR <19

CRI >80

1,7 Kg

0,028 m³

corten
corten

OTPLT804C

nero
black

OTPLT804N

4000K

1220LM






Malta

Paletto in alluminio con diffusore in vetro.
Disponibile applique.
Aluminium bollard with glass diffuser.
Wall lamp available.

Applique a p. 336
Wall lamp p. 336

sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

power: 1 x max 8W
voltage: 220-240Vac



paletto bollard					
		IP65		2,2 kg	0,2 m³
bianco white	antracite anthracite				
PLT.MALTA/BIANCO	PLT.MALTA/ANTRACIT				
					





Ares

Paletto in alluminio con diffusore in policarbonato. Disponibile applique.
Aluminium bollard with polycarbonate diffuser. Wall lamp available.

Applique a p. 332
Wall lamp p. 332

sorgente luminosa
light source
E27
lampadine non incluse
light bulbs not included

power: 1 x max 13W
voltage: 220-240Vac



power: 1 x max 13W
voltage: 220-240Vac



paletto
bollard





IP541,2 kg0,015 m³

silver
silver

nero
black

PLT.ARES/50-SILVER

PLT.ARES/50-NERO



paletto
bollard





IP541,8 kg0,023 m³

silver
silver

nero
black

PLT.ARES/80-SILVER

PLT.ARES/80-NERO






Pou

Paletto in alluminio con diffusore in policarbonato. Disponibile applique.
Aluminium structure with polycarbonate diffuser. Wall lamp available.


Applique a p. 334
Wall lamp p. 334

sorgente luminosa
light source
E27
lampadine non incluse
light bulbs not included

power: 1 x max 13W
voltage: 220-240Vac




power: 1 x max 13W
voltage: 220-240Vac



paletto bollard				
		IP44	1 kg	0,006 m³
silver silver	nero black			
PLT.POU/53-SILVER	PLT.POU/53-NERO			

paletto bollard				
		IP44	1,5 kg	0,01 m³
silver silver	nero black			
PLT.POU/83-SILVER	PLT.POU/83-NERO			

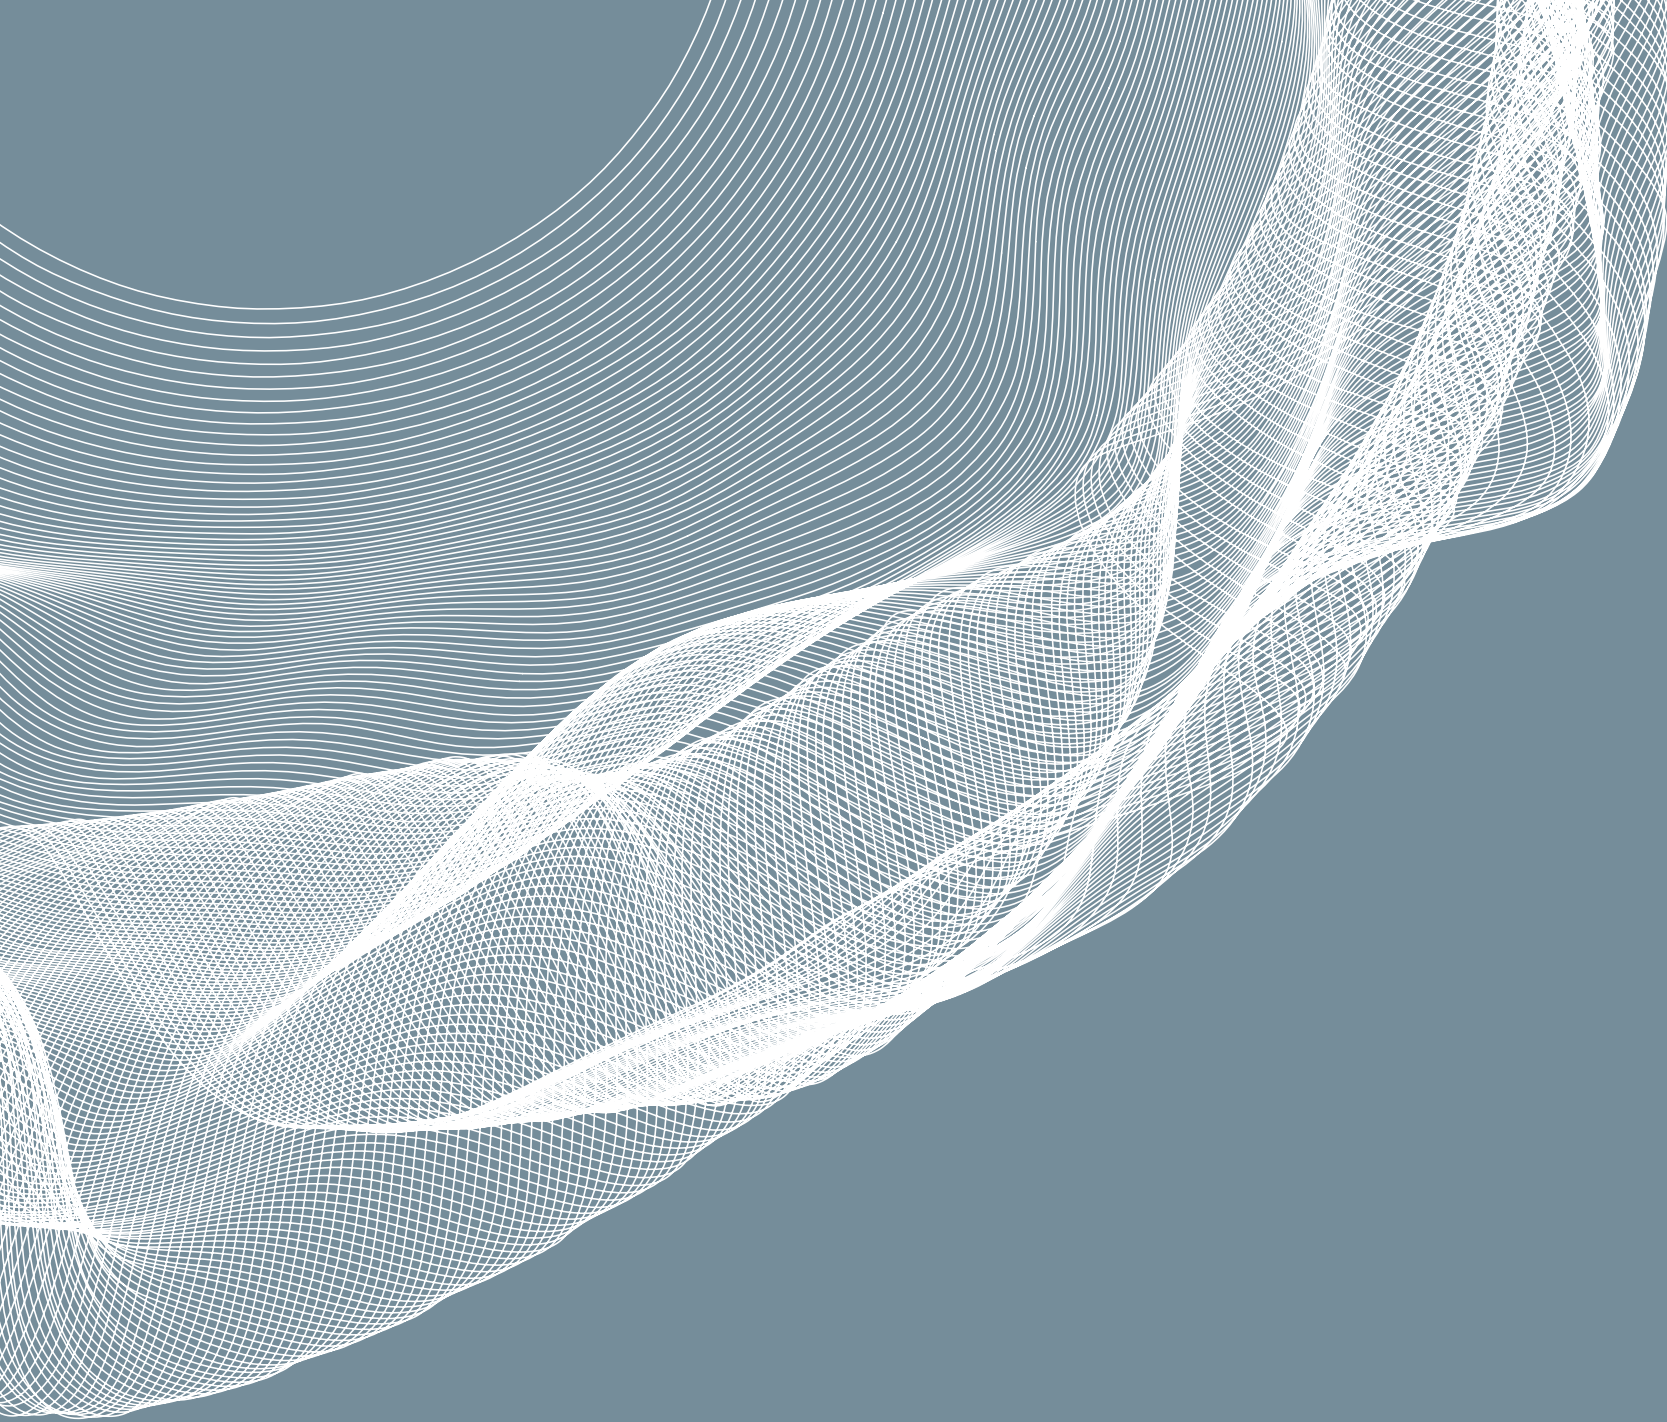

outdoor

Plafoniere e applique

Ceiling and wall lamps

Simba


Applique LED da esterni a doppia emissione.
Struttura in alluminio e diffusore in policarbonato. Driver incluso.
Outdoor LED double emission wall lamp.
Aluminium structure and polycarbonate diffuser. Driver included.



sorgente luminosa
light source
LED

power: 20W
voltage: 220-240Vac

applique biemissione double emission wall lamp							
		120°	30.000	IP65	UGR <19	CRI >90	1,15 Kg
							0,003 m³
bianco white	corten corten	antracite anthracite					
OTAP0810B	OTAP0810C	OTAP0810G		4000K		1100LM	

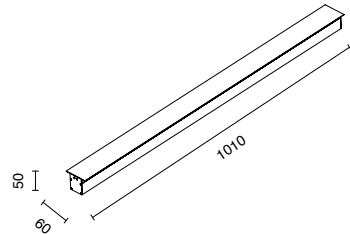

Simba/pc


Applique LED da esterni a doppia emissione.
Struttura in alluminio e diffusore in policarbonato. Driver incluso.
Outdoor LED double emission wall lamp.
Aluminium structure and polycarbonate diffuser. Driver included.



sorgente luminosa
light source
LED


power: 6W
voltage: 220-240Vac

applique biemissione double emission wall lamp							
		120°	30.000	IP65	UGR <19	CRI >90	0,36 Kg
							0,001 m³
bianco white	corten corten	antracite anthracite					
OTAP0830B	OTAP0830C	OTAP0830G		4000K		350LM	





ESTERNO OUTDOOR

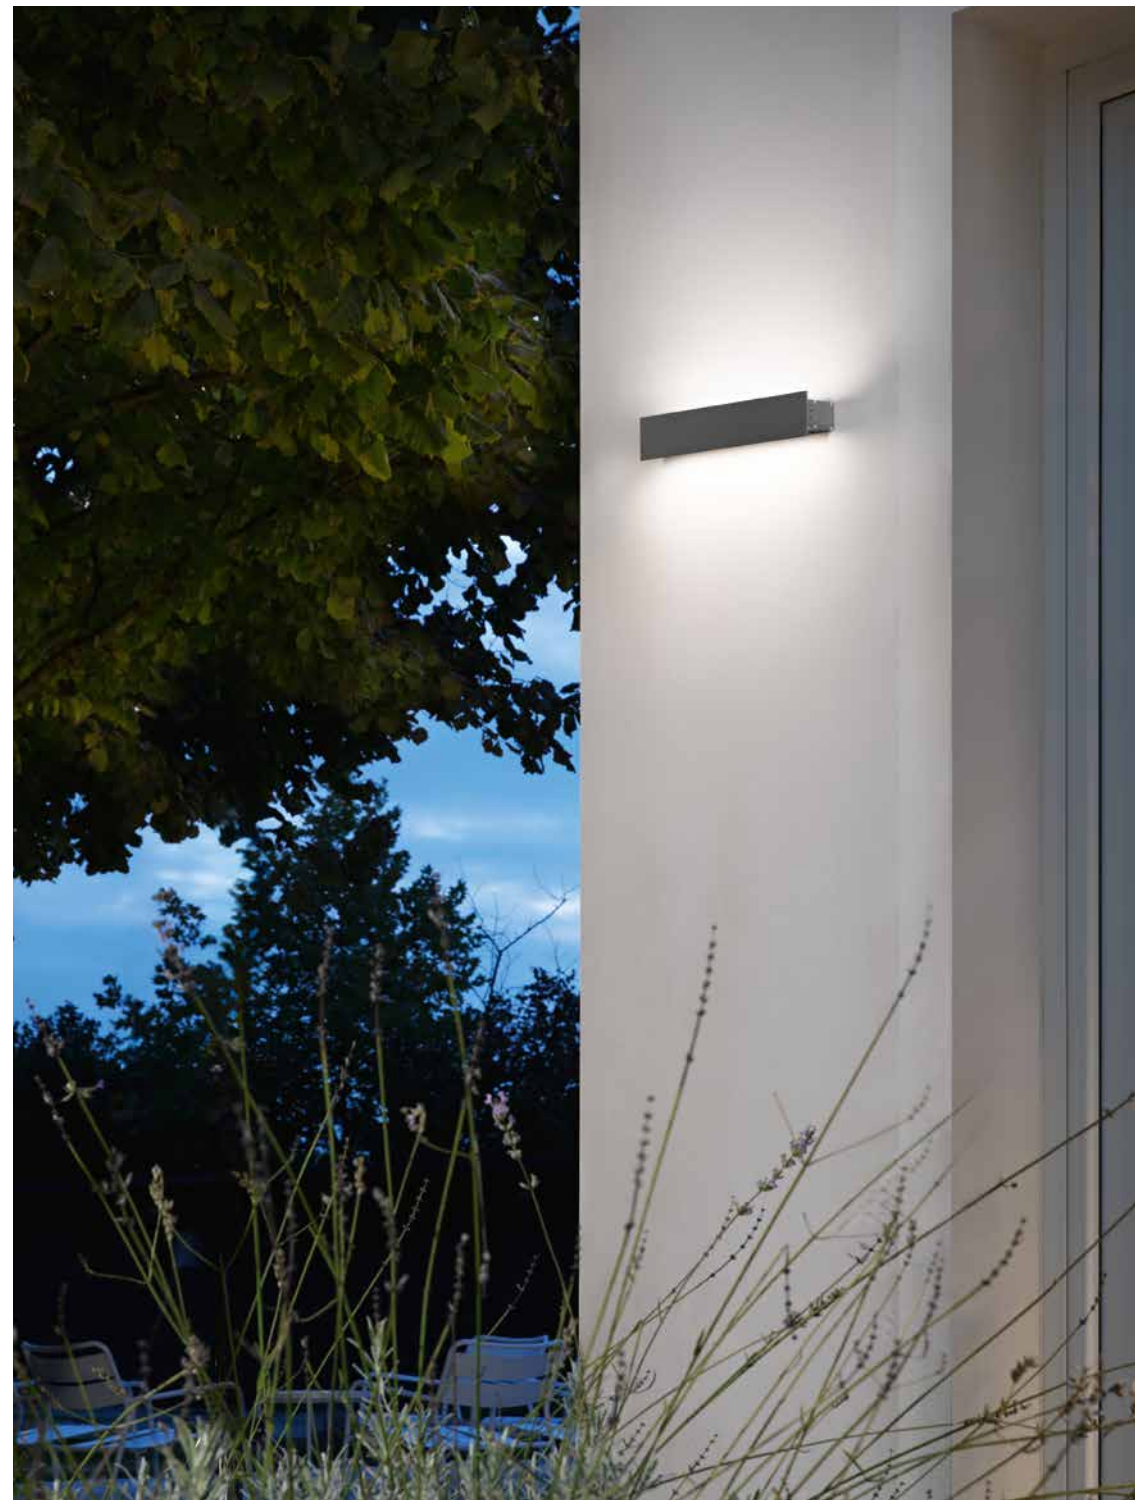

PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS




Double cube

Applique LED da esterni. Struttura in alluminio con alette regolabili. Diffusore in vetro. Driver incluso.
Outdoor LED wall lamp. Aluminium structure with adjustable wings. Glass diffuser. Driver included.

sorgente luminosa
light source
LED

power: 4 x 5W
voltage: 220-240Vac



applique biemissione
double emission wall lamp

bianco
white

OTAP0009B
OTAP0010B

corten
corten

OTAP0009C
OTAP0010C

nero
black

OTAP0009N
OTAP0010N

3000K
4000K

1490LM
1540LM

295




Cube

Applique LED da esterni. Struttura in alluminio con alette regolabili.
Diffusore in vetro. Driver incluso.
Outdoor LED wall lamp. Aluminium structure with adjustable wings.
Glass diffuser. Driver included.

sorgente luminosa
light source
LED

power: 2 x 5W
voltage: 220-240Vac



applique biemissione double emission wall lamp									
		0-120°	20.000	IP65	UGR <19	CRI >80	0,5 kg	0,03 m³	
bianco white	antracite anthracite	corten corten	nero black						
AP.CUBE/BIANCO	AP.CUBE/ANTRACITE	AP.CUBE/CORTEN	OTAP0011N	3000K	720LM				
AP.CUBE/4000-B.CO	AP.CUBE/4000-ANTR	AP.CUBE/4000-CORT	OTAP0012N	4000K	770LM				



Per codici METEL vedere listino See the price list for METEL codes

Applique LED da esterni. Struttura in alluminio con alette regolabili. Diffusore in vetro. Driver incluso.
Outdoor LED wall lamp. Aluminium structure with adjustable wings. Glass diffuser. Driver included.



ESTERNO OUTDOOR



sorgente luminosa
light source
LED

power: 2 x 5W
voltage: 220-240Vac

applique biemissione double emission wall lamp					
0-120°	20.000	IP65	UGR <19	CRI >80	0,56 Kg
0,05 m³					
bianco white	antracite anthracite	corten corten	nero black		
OTAP0007B	OTAP0007G	OTAP0007C	OTAP0007N	3000K	720LM
OTAP0008B	OTAP0008G	OTAP0008C	OTAP0008N	4000K	770LM

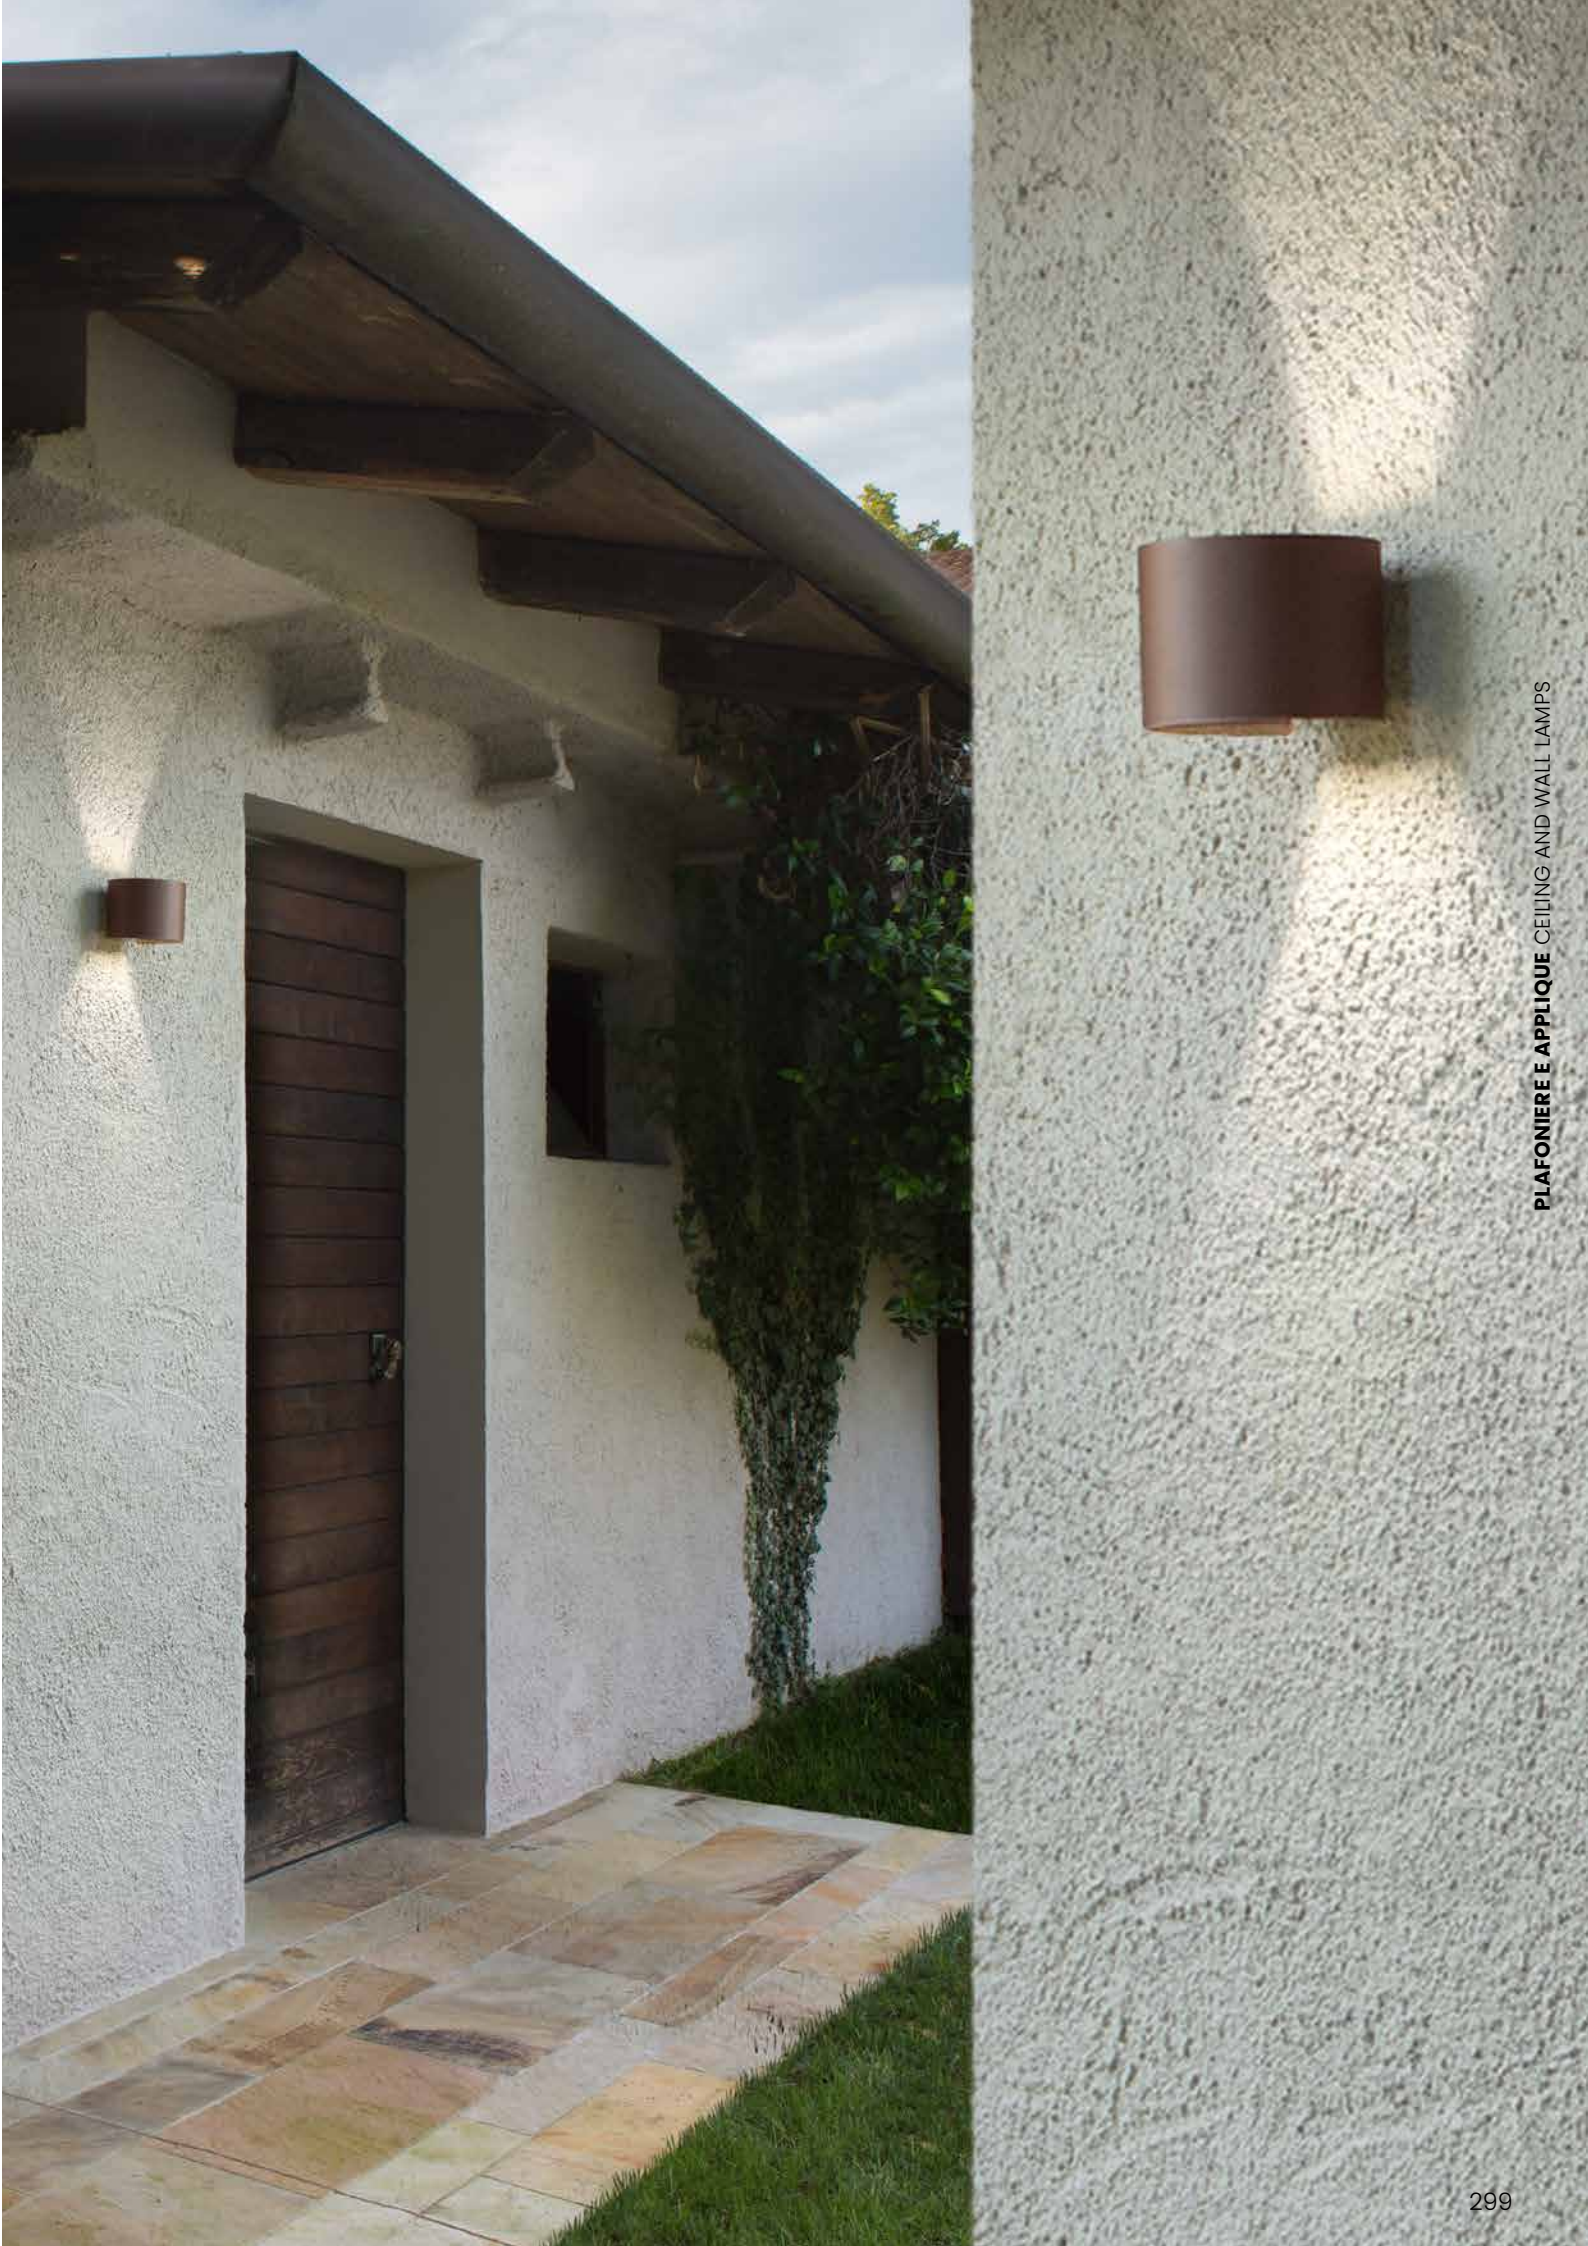

PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS




ESTERNO OUTDOOR

Zenda

Applique LED da esterni, orientabile.
Struttura in alluminio. Diffusore in polycarbonato. Driver incluso.
Adjustable outdoor LED wall lamp.
Aluminium structure. Polycarbonate diffuser. Driver included.

sorgente luminosa
light source
LED

power: **20W**
voltage: **220-240Vac**



PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS

applique orientabile
adjustable wall lamp

120-350°30.000IP65UGR <19CRI >901,04 Kg0,005 m³

corten corten	antracite anthracite		
OTAP0014C	OTAP0014G	4000K	1326LM






ESTERNO OUTDOOR

Ninja

Applique LED da esterni. Struttura in alluminio. Diffusore in policarbonato. Driver incluso.
Outdoor LED wall lamp. Aluminium structure. Polycarbonate diffuser. Driver included.

sorgente luminosa
light source
LED

power: 20W
voltage: 220-240Vac



PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS

applique wall lamp														
	120°	30.000	IP65	UGR <19	CRI >90	0,9 Kg	0,004 m³							
corten corten	antracite anthracite	nero black												
OTAP0016C	OTAP0016G	OTAP0016N												






Sonny

Applique LED da esterni orientabile.
Struttura in alluminio. Diffusore in polycarbonato. Temperatura colore selezionabile prima dell'installazione (CCT). Driver incluso.
Adjustable outdoor LED wall lamp.
Aluminium structure. Polycarbonate diffuser. Possible to select the colour temperature (CCT) before installation. Driver included.



sorgente luminosa
light source
LED

power: 20W
voltage: 220-240Vac



applique orientabile
adjustable wall lamp



bianco white	corten corten	antracite anthracite	CCT 3000K +4000K	1492LM 1504LM
OTAP0015B	OTAP0015C	OTAP0015G		






Nevio

Applique LED da esterni. Struttura in alluminio, diffusore in policarbonato. Driver incluso. COB Bridgelux.
Outdoor LED wall lamp. Aluminium structure. Polycarbonate diffuser. Driver included. Bridgelux COB.

sorgente luminosa
light source
LED

power: 6W
voltage: 220-240Vac



applique biemissione
double emission wall lamp

	120°	30.000	IP54	UGR <19	CRI >80	0,43 Kg	0,001 m³
bianco white	corten corten	antracite anthracite		4000K	595LM		
OTAP0018B	OTAP0018C	OTAP0018G					






Teta

Applique LED da esterni. Struttura in alluminio. Diffusore in policarbonato. Driver incluso.
Outdoor LED wall lamp. Aluminium structure. Polycarbonate diffuser. Driver included.

sorgente luminosa
light source
LED

max power: 12W
voltage: 220-240Vac




Teta/pc

Applique LED da esterni. Struttura in alluminio. Diffusore in policarbonato. Driver incluso.
Outdoor LED wall lamp. Aluminium structure. Polycarbonate diffuser. Driver included.

sorgente luminosa
light source
LED


max power: 9W
voltage: 220-240Vac



applique
wall lamp

360° 30.000 IP65 UGR <19 CRI >90 1,26 Kg 0,003 m³

bianco white	corten corten	antracite anthracite
OTAP0019B	OTAP0019C	OTAP0019G
		4000K 1021LM

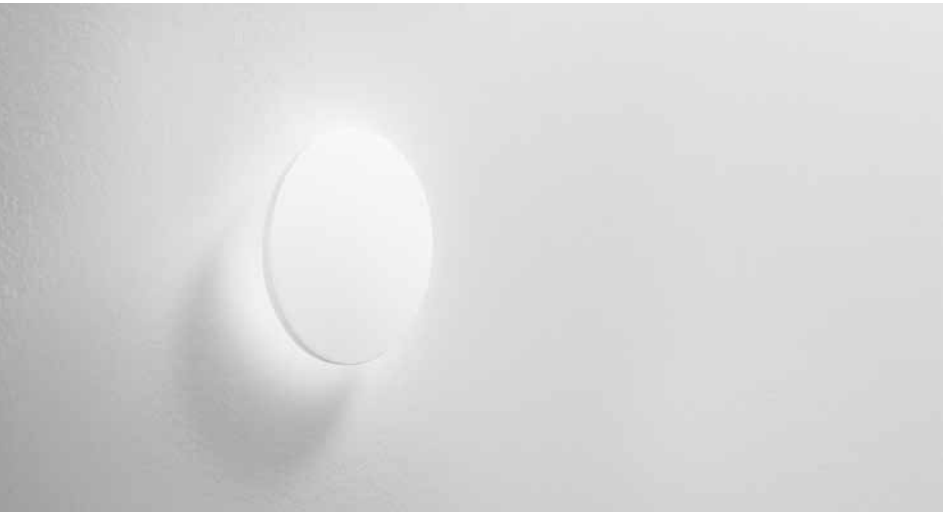

applique
wall lamp

360° 30.000 IP65 UGR <19 CRI >90 0,63 Kg 0,002 m³

bianco white	corten corten	antracite anthracite
OTAP0024B	OTAP0024C	OTAP0024G
		4000K 731LM




ESTERNO OUTDOOR

Ghita

Applique LED per esterni. Struttura in alluminio, diffusore in policarbonato. Driver incluso.
Outdoor LED wall lamp. Aluminium structure. Polycarbonate diffuser. Driver included.

sorgente luminosa
light source
LED

power: 20W
voltage: 220-240Vac



PLAFONIERE E APPLIQUE CEILING AND WALL LAMPS

applique
wall lamp

120°	30.000	IP65	UGR <19	CRI >90	0,94 Kg	0,004 m³	
bianco white	corten corten	antracite anthracite					
OTAP0017B	OTAP0017C	OTAP0017G		4000K	1381LM		




Falco

Applique LED per esterni a doppia
emissione in abs e policarbonato.
Disponibile in diversi colori.
Outdoor LED wall lamp with double
emission in abs and polycarbonate.
Available in different colours.

sorgente luminosa
light source
LED

power: 12W
voltage: 220-240Vac



applique biemissione
double emission wall lamp





120°



30.000



IP65



UGR <19



CRI >80



0,7 kg



0,0043 m³

bianco white	silver silver	nero black		
AP.FALCO/BCO	AP.FALCO/SILVER	AP.FALCO/NERO	4000K	780LM



Per codici METEL vedere listino See the price list for METEL codes



Ares


Applique da esterni in alluminio con diffusore in policarbonato. Disponibile paletto.
Aluminium outdoor wall lamp with polycarbonate diffuser. Bollard available.

Paletto a p. 302
Bollard p. 302

sorgente luminosa
light source

E27
lampadine non incluse
light bulbs not included

power: 1 x max 13W
voltage: 220-240Vac



applique
wall lamp



IP54



0,75 kg



0,0083 m³

silver
silver

AP.ARES/SILVER

nero
black

AP.ARES/NERO



Per codici METEL vedere listino See the price list for METEL codes



Pou


Applique da esterni in alluminio con diffusore in policarbonato. Disponibile **paletto**.
Aluminium outdoor wall lamp with polycarbonate diffuser. Bollard available.

Paletto a p. 304
Bollard p. 304

sorgente luminosa
light source

E27
lampadine non incluse
light bulbs not included

power: 1 x max 13W
voltage: 220-240Vac



applique
wall lamp



IP44 0,55 kg 0,0022 m³

silver
silver

nero
black

AP.POU/SILVER

AP.POU/NERO



Per codici METEL vedere listino See the price list for METEL codes



Malta


Applique da esterni in alluminio con diffusore in vetro. Disponibile paletto. Aluminium outdoor wall lamp with glass diffuser. Bollard available.

Paletto a p. 300
Bollard p. 300

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

power: 1 x max 8W
voltage: 220-240Vac



applique
wall lamp



IP65 0,45 Kg 0,001 m³

bianco
white

antracite
anthracite

AP.MALTA/BIANCO

AP.MALTA/ANTRACITE



Per codici METEL vedere listino See the price list for METEL codes

Fonte square

Applique LED per esterni. Struttura in alluminio e diffusore in policarbonato. Driver incluso.
Outdoor LED wall lamp. Aluminium structure and polycarbonate diffuser. Driver included.



sorgente luminosa
light source
LED

power: 12W
voltage: 220-240Vac

applique
wall lamp

120°

20.000

IP65

UGR <19

CRI >80

0,66 Kg

0,09 m³

corten
corten


nero
black

OTAP0006C

OTAP0006N

4000K

780LM



Fonte round

Applique LED per esterni. Struttura in alluminio e diffusore in policarbonato. Driver incluso.
Outdoor LED wall lamp. Aluminium structure and polycarbonate diffuser. Driver included.



sorgente luminosa
light source
LED

power: 12W
voltage: 220-240Vac

applique
wall lamp

120°

20.000

IP65

UGR <19

CRI >80

0,66 Kg

0,09 m³

corten
corten


nero
black

OTAP0005C

OTAP0005N

4000K

780LM



Zeno round 2

Applique GU10 per esterni. Struttura in alluminio e diffusore in vetro.
Outdoor GU10 wall lamp. Aluminium structure and glass diffuser.



sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

power: 2 x max 8W
voltage: 220-240Vac

IP65

0,41 Kg

0,001 m³

bianco
white


corten
corten

nero
black

OTAP0020B

OTAP0020C

OTAP0020N



Zeno round

Applique GU10 per esterni. Struttura in alluminio e diffusore in vetro.
Outdoor GU10 wall lamp. Aluminium structure and glass diffuser.



sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

power: 1 x max 8W
voltage: 220-240Vac

IP65

0,31 Kg

0,001 m³

bianco
white


corten
corten

nero
black

OTAP0021B

OTAP0021C

OTAP0021N





Zeno square 2

Applique GU10 per esterni. Struttura in alluminio e diffusore in vetro.
Outdoor GU10 wall lamp. Aluminium structure and glass diffuser.



sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

power: 2 x max 8W
voltage: 220-240Vac

applique biemissione
double emission wall lamp





IP650,41 Kg0,001 m³

bianco
white


corten
corten

nero
black

OTAP0022B

OTAP0022C

OTAP0022N



Zeno square

Applique GU10 per esterni. Struttura in alluminio e diffusore in vetro.
Outdoor GU10 wall lamp. Aluminium structure and glass diffuser.



sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

power: 1 x max 8W
voltage: 220-240Vac

applique
wall lamp





IP650,31 Kg0,001 m³

bianco
white


corten
corten

nero
black

OTAP0023B

OTAP0023C

OTAP0023N






Nevada

Collezione per esterni, struttura in alluminio con diffusore in vetro.
Disponibile in quattro colori.
Outdoor collection, aluminium structure with glass diffuser. Available in four colours.


sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

power: 2 x max 8W
voltage: 220-240Vac



power: 1 x max 8W
voltage: 220-240Vac



applique biemissione
double emission wall lamp

				
		IP54	0,9 kg	0,003 m³
bianco white	silver silver	marrone brown	nero black	
PL.NEVADA/2-BIANCO	PL.NEVADA/2-SILVER	PL.NEVADA/2-MARRO	PL.NEVADA/2-NERO	
				

plafoniera
ceiling lamp

				
		IP54	0,4 kg	0,001 m³
bianco white	silver silver	marrone brown	nero black	
PL.NEVADA/BIANCO	PL.NEVADA/SILVER	PL.NEVADA/MARRONE	PL.NEVADA/NERO	
				





Jubo

Collezione per esterni, struttura in alluminio con diffusore in vetro.
Disponibile in quattro colori.
Outdoor collection. Aluminium structure with glass diffuser. Available in four colours.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

power: 2 x max 8W
voltage: 220-240Vac



applique biemissione
double emission wall lamp

IP54

0,9 kg

0,003 m³

bianco white	silver silver	marrone brown	nero black
PL.JUBO/2-BIANCO	PL.JUBO/2-SILVER	PL.JUBO/2-MARRONE	PL.JUBO/2-NERO



plafoniera
ceiling lamp

IP54

0,4 kg

0,0013 m³

bianco white	silver silver	marrone brown	nero black
PL.JUBO/BIANCO	PL.JUBO/SILVER	PL.JUBO/MARRONE	PL.JUBO/NERO






Linus

Applique per esterno a doppia emissione in alluminio con diffusore in policarbonato. Disponibile in diversi colori.
Double emission outdoor wall lamp, made of aluminium with polycarbonate diffuser. Available in different colors.

sorgente luminosa
light source

E27
lampadine non incluse
light bulbs not included

power: 1 x max 20W
voltage: 220-240Vac



applique biemissione
double emission wall lamp



IP44

0,7 kg

0,004 m³

bianco
white

silver
silver

nero
black

AP.LINUS/BCA

AP.LINUS/SILVER

AP.LINUS/NERO






Fabius

Applique per esterno a doppia emissione in alluminio con diffusore in policarbonato. Disponibile in diversi colori.
Double emission outdoor wall lamp, made of aluminium with polycarbonate diffuser. Available in different colors.

sorgente luminosa
light source

E27
lampadine non incluse
light bulbs not included

power: 1 x max 20W
voltage: 220-240Vac



applique biemissione
double emission wall lamp



IP44

0,7 kg

0,004 m³

bianco white	silver silver	nero black
AP.FABIUS/BCA	AP.FABIUS/SILVER	AP.FABIUS/NERO




Patio


Plafoniera LED in alluminio con diffusore in materiale polimerico. Driver incluso. Utilizzabile come applique o plafoniera. Aluminium LED ceiling lamp with polymeric diffuser. Driver included. Also usable as a wall lamp.

sorgente luminosa
light source
LED

power: 10W
voltage: 220-240Vac



applique / plafoniera
wall lamp / ceiling lamp



corten corten	antracite anthracite	4000K	700LM
OTAP0013C	OTAP0013G		






Picca


Plafoniera o applique per esterni, struttura in ABS e diffusore in policarbonato. Disponibile in tre colori.
Outdoor ceiling and wall lamp, ABS structure and polycarbonate diffuser. Available in three colours.

sorgente luminosa
light source
E27
lampadine non incluse
light bulbs not included

power: 1 x max 20W
voltage: 220-240Vac



power: 2 x max 20W
voltage: 220-240Vac



applique / plafoniera
wall lamp / ceiling lamp



IP651,1 kg0,0035 m³

bianco white	grigio gray	antracite anthracite
PL.PICCA/PC-BIANCO	PL.PICCA/PC-GRIGIO	PL.PICCA/PC-ANTRAC



applique / plafoniera
wall lamp / ceiling lamp



IP651,2 kg0,0078 m³

bianco white	grigio gray	antracite anthracite
PL.PICCA/GR-BANCO	PL.PICCA/GR-GRIGIO	PL.PICCA/GR-ANTRAC






Petar

Plafoniera per esterni, struttura in ABS e diffusore in policarbonato. Disponibile in diversi colori. Utilizzabile come applique e come plafoniera.
Outdoor ceiling lamp, ABS structure and polycarbonate diffuser. Available in different colours. Usable as a wall lamp and as a ceiling lamp.

sorgente luminosa
light source
E27
lampadine non incluse
light bulbs not included

power: 2 x max 20W
voltage: 220-240Vac



applique / plafoniera
wall lamp / ceiling lamp



IP65 1 kg 0,0081 m³

bianco white	grigio gray	antracite anthracite
PL.PETAR/BIANCO	PL.PETAR/GRIGIO	PL.PETAR/ANTRACITE






Paris

Plafoniera per esterni in alluminio con diffusore in policarbonato. Disponibile in tre colori: Bianco, Silver, Nero. Prodotto utilizzabile sia come applique che come plafoniera.
Aluminium outdoor ceiling lamp with polycarbonate diffuser. Available in three colours: white, silver, black. Usable as a wall lamp and as a ceiling lamp.


sorgente luminosa
light source

E27
lampadine non incluse
light bulbs not included

power: 2 x max 20W
voltage: 220-240Vac



applique / plafoniera
wall lamp / ceiling lamp



bianco white	silver silver	nero black
AP.PARIS/BCA	AP.PARIS/SILVER	AP.PARIS/NERO




Base


Plafoniera o applique per esterni in ABS e policarbonato. Disponibile in diversi colori. Utilizzabile come applique e come plafoniera.
Outdoor ceiling or wall lamp made of ABS and polycarbonate. Available in different colours. Usable as a wall lamp and as a ceiling lamp.

sorgente luminosa
light source
E27
lampadine non incluse
light bulbs not included

power: 2 x max 20W
voltage: 220-240Vac



applique / plafoniera
wall lamp / ceiling lamp



IP65 0,9 kg 0,008 m³

bianco white	silver silver	nero black
PL.BASE/BCO	PL.BASE/SILVER	PL.BASE/NERO



outdoor

Segnapassi e faretti calpestabili

Steplights and walkable spotlights

Free square

Segnapasso LED per esterni in alluminio.
Diffusore in materiale plastico.
Driver incluso.
Aluminium outdoor LED steplight.
Plastic diffuser. Driver included.



sorgente luminosa
light source
LED

power: **3W**
voltage: **220-240Vac**

segnapassi
steplights

bianco
white

corten
corten

antracite
anthracite


OTSP0001B

OTSP0001C

OTSP0001G

4000K

180LM



Free round

Segnapasso LED per esterni in alluminio.
Diffusore in materiale plastico.
Driver incluso.
Aluminium outdoor LED steplight.
Plastic diffuser. Driver included.



sorgente luminosa
light source
LED

power: **3W**
voltage: **220-240Vac**

segnapassi
steplights

bianco
white

corten
corten

antracite
anthracite

OTSP0002B

OTSP0002C

OTSP0002G

4000K

180LM








Shade

Segnapasso LED per esterni in alluminio.
Diffusore in policarbonato. Driver
incluso.
Aluminium outdoor LED steplight.
Polycarbonate diffuser. Driver included.

sorgente luminosa
light source
LED

power: 13W
voltage: 220-240Vac



segnapassi incasso recessed steplights											
120°				30.000	IP65	255 x 103	UGR <19	CRI >80	0,8 kg	0,0036 m³	
silver silver			nero black								
AP.SHADE/SILVER			AP.SHADE/NERO						4000K 620LM		

Floor square

Faretto calpestabile da incasso,
per esterni. Cover in acciaio inox 304,
struttura in alluminio pressofuso.
Involucro da interrare incluso.
Outdoor walkable recessed spotlight.
304 stainless steel cover. Die-cast
aluminium structure. Casing included.




sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

power: 1 x max 8W
voltage: 220-240Vac

faretto incasso
recessed spotlight

cromo
chrome

OTLT002



Floor round

Faretto calpestabile da incasso,
per esterni. Cover in acciaio inox 304,
struttura in alluminio pressofuso.
Involucro da interrare incluso.
Outdoor walkable recessed spotlight.
304 stainless steel cover. Die-cast
aluminium structure. Casing included.




sorgente luminosa
light source
GU10
lampadine non incluse
light bulbs not included

power: 1 x max 8W
voltage: 220-240Vac

faretto incasso
recessed spotlight


cromo
chrome

OTLT001





ESTERNO OUTDOOR

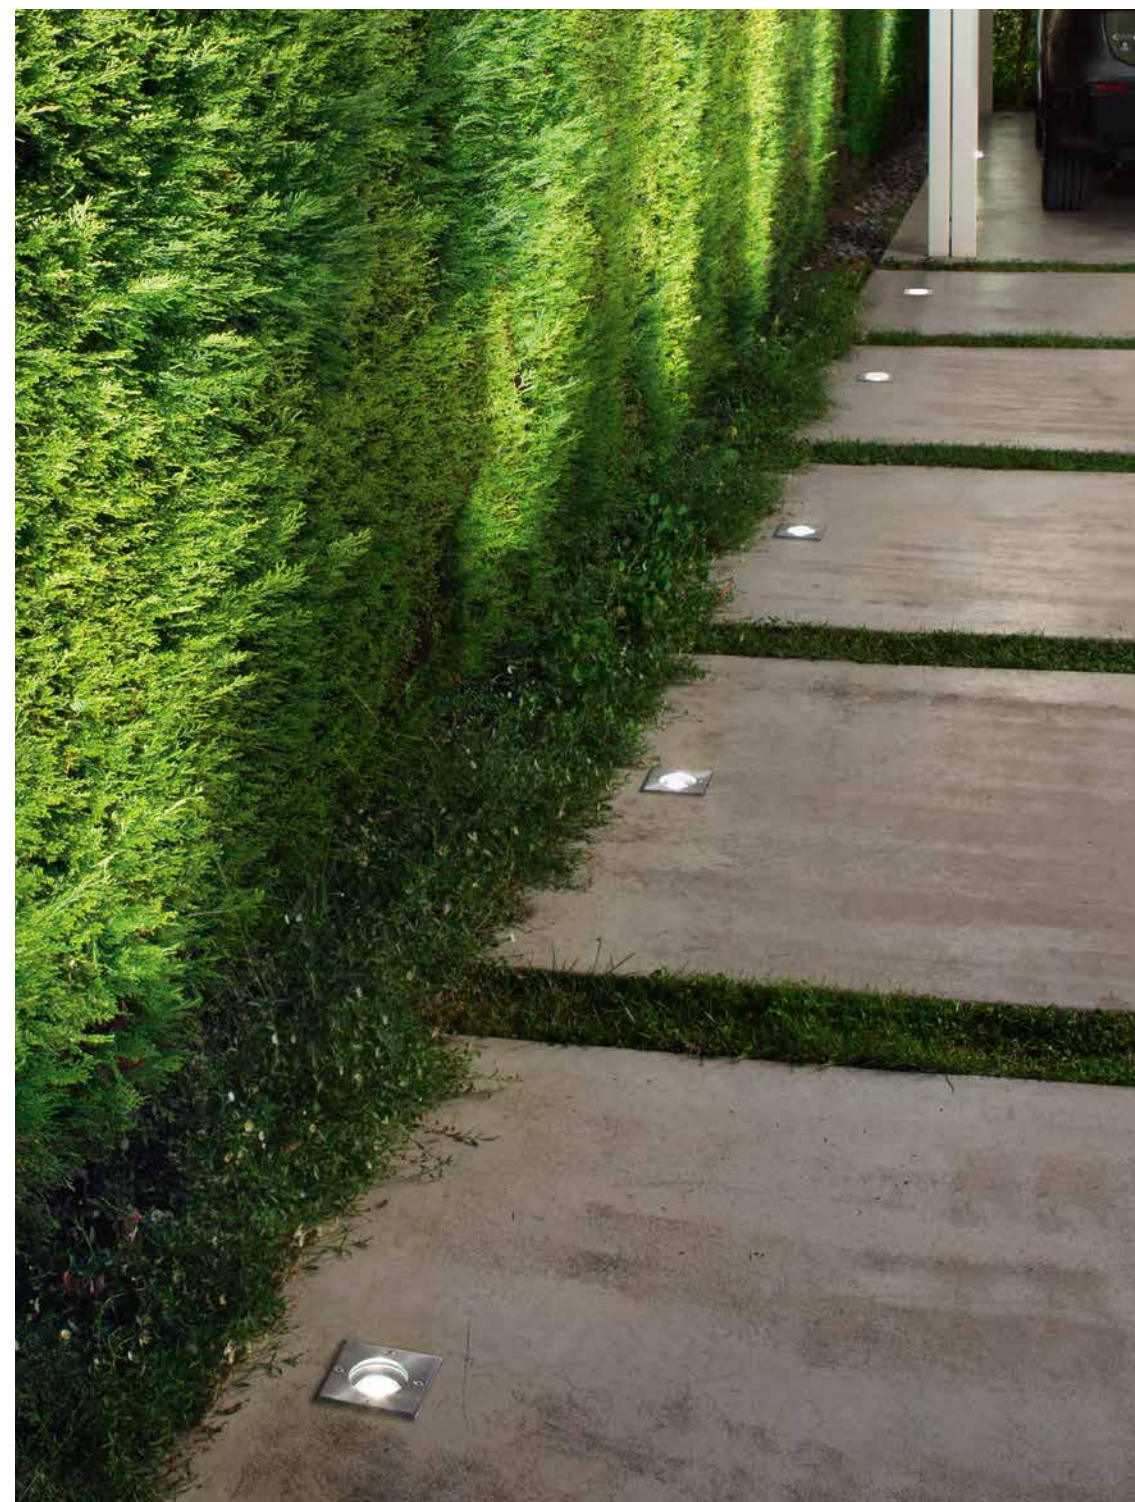

SEGNAPASSI E FARETTI CALPESTABILI STEPLIGHTS AND WALKABLE SPOTLIGHTS






Neo

Faretto segnapasso a LED per esterni, struttura in alluminio cromato. Disponibile in tre emissioni di luce. Driver non incluso ma necessario. Outdoor LED steplight, chromed aluminium structure. Available in three light emissions. Driver not included but necessary.




segnapassi
steplights



 90°	 30.000	 IP67	 90°	 30.000	 IP67	 90°	 30.000	 IP67			
 UGR <19	 CRI >90	 0,1 Kg	 0,001 m³	 UGR <19	 CRI >90	 0,1 Kg	 0,001 m³	 UGR <19	 CRI >90	 0,1 Kg	 0,001 m³
 cromo chrome			 cromo chrome			 cromo chrome					
NEO/1			NEO/2			NEO/4					
3000K 20LM			3000K 40LM			3000K 80LM					
											
sorgente luminosa light source			sorgente luminosa light source			sorgente luminosa light source					
LED			LED			LED					
power: 0,5W voltage: 12V			power: 0,8W voltage: 12V			power: 1W voltage: 12V					
 Ø 70			 Ø 70			 Ø 70					

driver non incluso ma necessario
driver not included but necessary

35W
Vin 100-240Vac
Vout 12Vdc
AMPERE 0-3 A
IP67



NEO/DRIVER




Goa

Spot da esterno in ABS e policarbonato, fissabile a picchetto.
Outdoor spotlight made of ABS and polycarbonate, fixable by stake.

sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

power: 1 x max 8W
voltage: 220-240Vac



spot con picchetto orientabile
adjustable stake spotlight



IP65 0,43 Kg 0,0018 m³

nero
black

SPOT.GOA






Guru

Spot per esterni, a pavimento o a picchetto, struttura in alluminio, diffusore in vetro, deflettore frontale in plastica.
Outdoor spotlight, on the floor or on the stake. Aluminium structure, glass diffuser, plastic front deflector.


sorgente luminosa
light source

GU10
lampadine non incluse
light bulbs not included

power: 1 x max 8W
voltage: 220-240Vac



power: 1 x max 8W
voltage: 220-240Vac

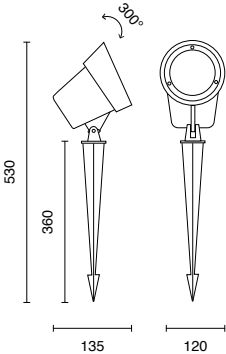

spot orientabile
adjustable spotlight



IP65

0,75 Kg

0,0091 m³

marrone
brown

nero
black

SPOT.GURU/MARRONE

SPOT.GURU/NERO



spot con picchetto orientabile
adjustable stake spotlight



IP65

0,9 kg

0,01 m³


marrone
brown

nero
black

PLT.GURU/MARRONE

PLT.GURU/NERO



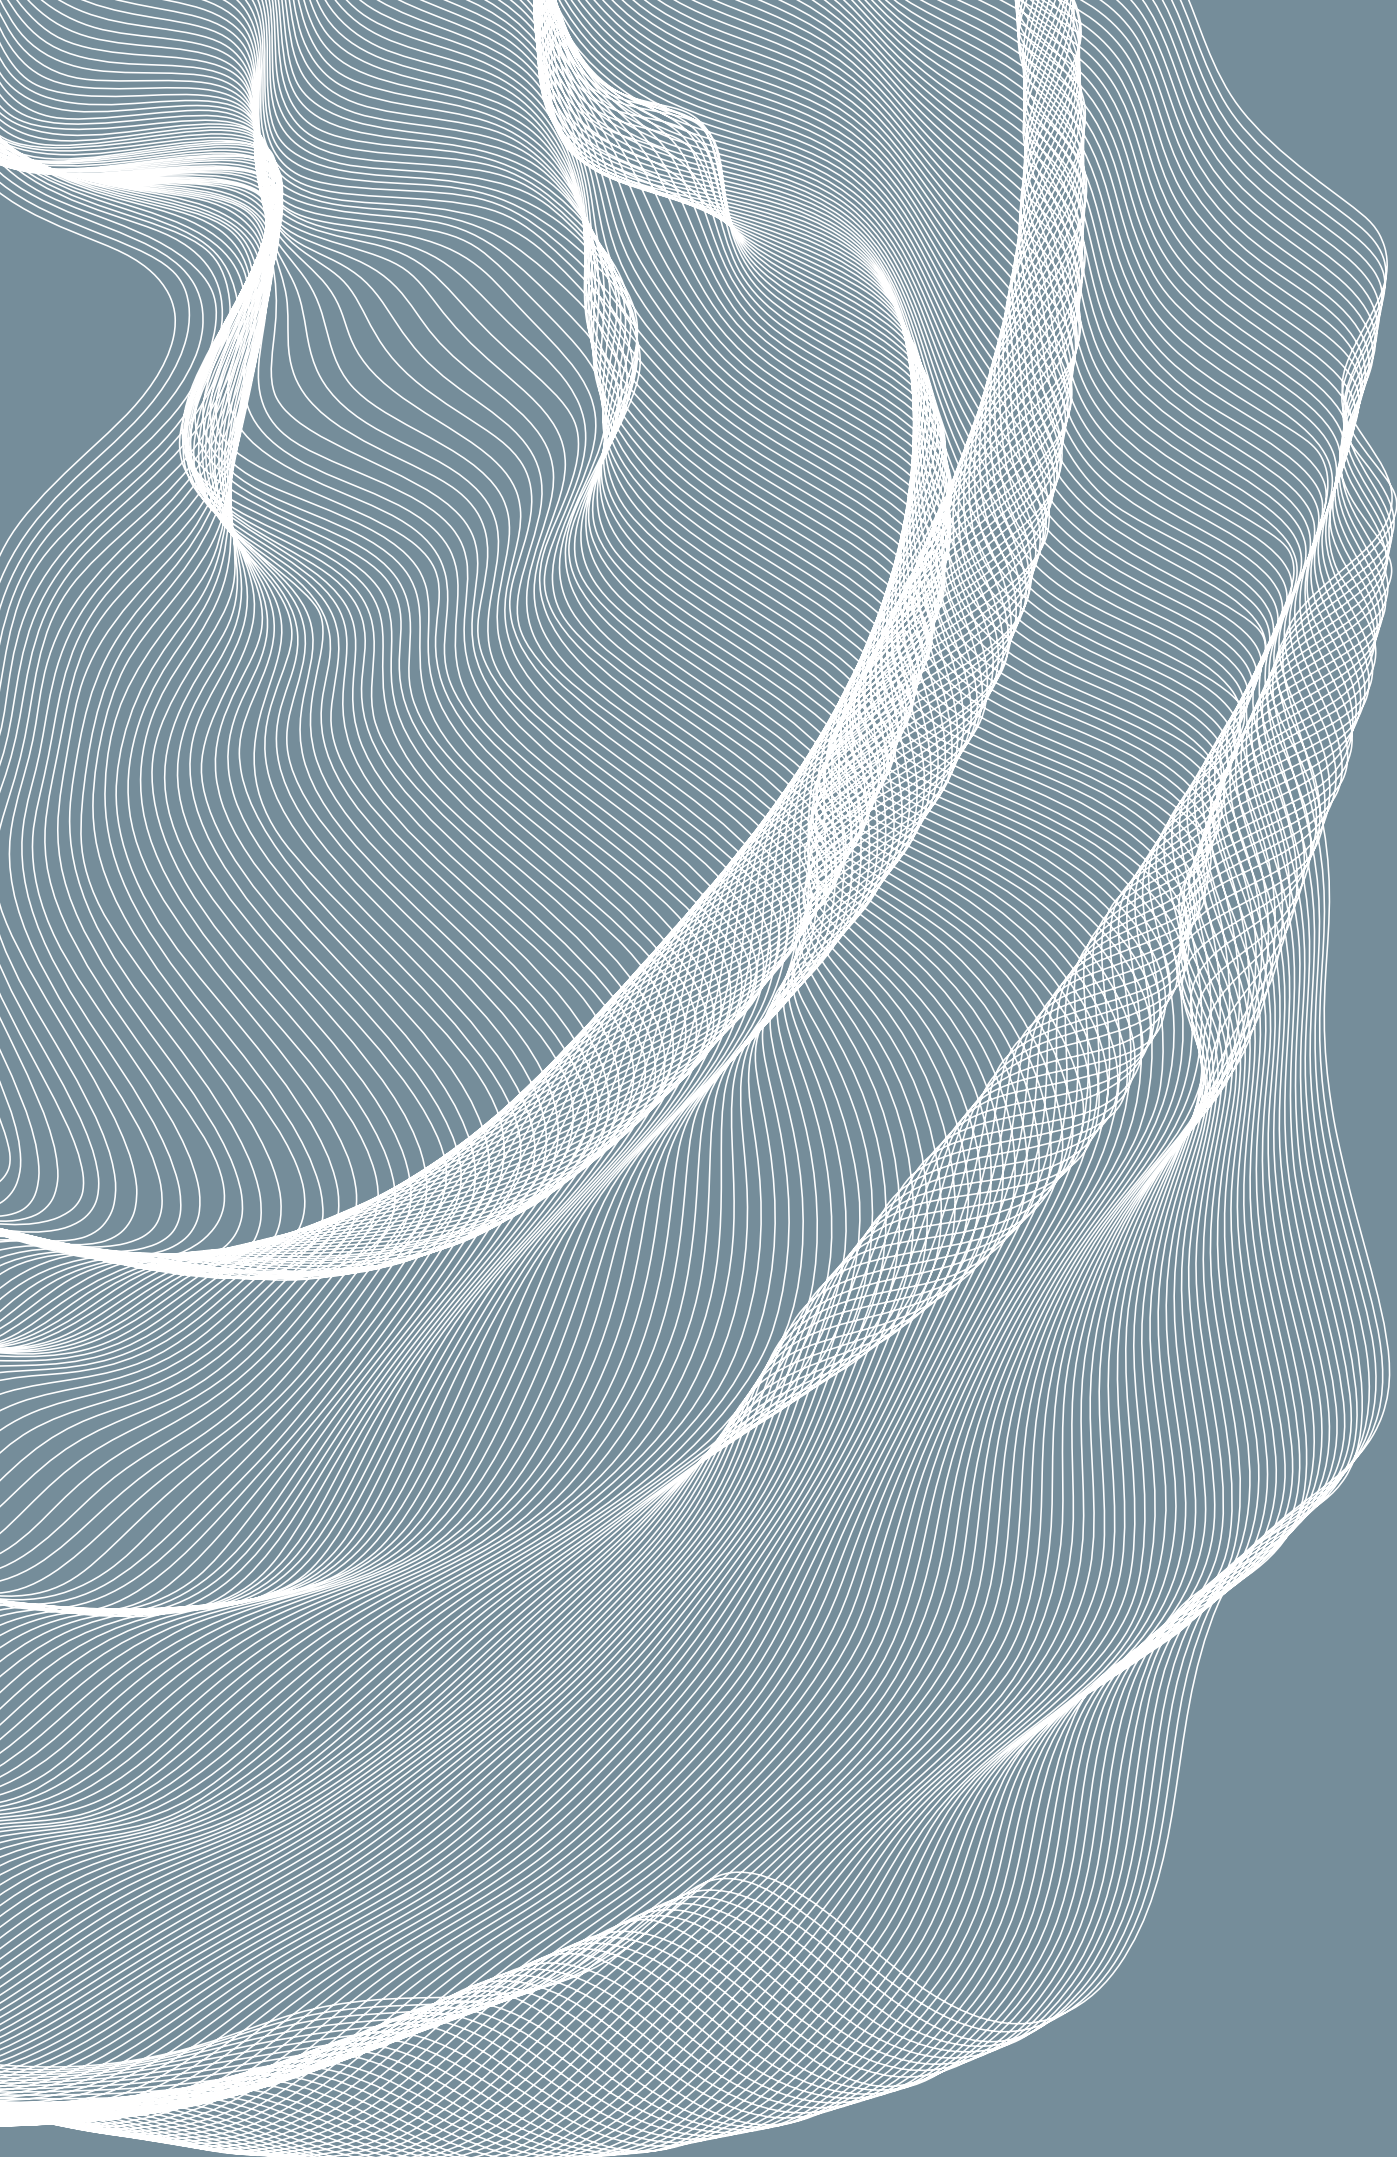

outdoor

**Lampade da tavolo
ricaricabili**
Rechargeable table lamps




Macao

Lampada da tavolo senza fili con ricarica USB. Accensione, spegnimento e dimmerazione della luce con sistema touch. Disponibile in diversi colori. 8 ore di autonomia con 100% di intensità luminosa.
Wireless table lamp with USB charging. Light switching on/off and dimming with touch system. Available in different colours. 8 hours of autonomy with 100% light intensity.



sorgente luminosa
light source
LED

power: 3W
dimmer: TOUCH
battery: 18650 / 5200mA h
USB: type C



lumetto table lamp					
120°	30.000	IP54	UGR <19	CRI >80	1,16 Kg
0,0102 m³					
bianco white	oro gold	salvia sage			
LT.MACAO/BIANCO	LT.MACAO/ORO	LT.MACAO/SALVIA	3000K	240LM	
blu avio blue avio	corten corten	antracite anthracite			
LT.MACAO/BLU.AVION	LT.MACAO/CORTEN	LT.MACAO/ANTRACITE	3000K	240LM	

Per codici METEL vedere listino See the price list for METEL codes




Tap

Lampada da tavolo senza fili con ricarica USB. Accensione, spegnimento e dimmerazione della luce con sistema touch. Disponibile in diversi colori. 8 ore di autonomia con 100% di intensità luminosa.
Wireless table lamp with USB charging. Light switching on/off and dimming with touch system. Available in different colours. 8 hours of autonomy with 100% light intensity.



sorgente luminosa
light source
LED

power: 3W
dimmer: **TOUCH**
battery: 124065 / 4000mA h
USB: type C



lumetto table lamp					
		120°	30.000	IP54	UGR <19
				CRI >80	1,15 Kg
					0,0082 m³
bianco white	oro gold	salvia sage			
LT.TAP/BIANCO	LT.TAP/ORO	LT.TAP/SALVIA	3000K	240LM	
blu avio blue avio	corten corten	antracite anthracite			
LT.TAP/BLU.AVION	LT.TAP/CORTEN	LT.TAP/ANTRACITE	3000K	240LM	

Per codici METEL vedere listino See the price list for METEL codes




Fiji

Lampada da tavolo senza fili con ricarica USB. Accensione, spegnimento e dimmerazione della luce con sistema touch. Disponibile in diversi colori. 8 ore di autonomia con 100% di intensità luminosa.
Wireless table lamp with USB charging. Light switching on/off and dimming with touch system. Available in different colours. 8 hours of autonomy with 100% light intensity.



sorgente luminosa
light source
LED

power: 3W
dimmer: TOUCH
battery: 18650 / 4000mA h
USB: type C



lumetto table lamp								
		120°	30.000	IP54	UGR <19	CRI >80	1,16 Kg	0,0102 m³
bianco white		salvia sage						
LT.FIJI/BIANCO		LT.FIJI/SALVIA		3000K		240LM		
								
corten corten		nero black						
LT.FIJI/CORTEN		LT.FIJI/NERO		3000K		240LM		
								

Per codici METEL vedere listino See the price list for METEL codes

Legenda
Legend

 Dimmerabile Dimmable	 Non dimmerabile Non-dimmable	 Classe di isolamento 1 Class 1	 Classe di isolamento 2 Class 2	 Classe di isolamento 3 Class 3
 Angolo emissione luminosa Angle of light emission	 Tempo di durata Duration time	 IP (Indice di protezione) IP (Ingress protection)	 UGR (Indice unificato di abbagliamento) UGR (Unified glare rating)	 CRI (Indice di resa cromatica) CRI (Color rendering index)
 Taglio quadrato Square cut out	 Taglio tondo Round cut out	 Peso Weight	 Metri cubi CBM	 Rotazione Rotation
 Tasto di accensione integrato Power button	 Doppia accensione Double ignition			

Condizioni di vendita
General sale conditions

1. Le condizioni di vendita di seguito riportate si intendono tacitamente accettate dall'acquirente, salvo espresso dissenso da comunicarsi per iscritto contestualmente all'emissione dell'ordine. 2. Gli ordini sono acquisiti sempre e comunque salvo approvazione del venditore. I tempi di consegna concordati non sono da ritenersi essenziali per l'esecuzione dell'ordine e pertanto non vincolanti. 3. I prezzi sono indicati in euro al netto di iva. 4. La merce viene fornita con la formula del "riservato dominio" e l'Azienda si riserva il diritto di fornirla anche in consegne parziali. 5. Decorso il termine di 10 giorni dalla data di consegna della merce, per l'acquirente decade il diritto di presentare reclamo per vizi e/o difetti. Il reclamo dovrà essere effettuato per iscritto. 6. Le descrizioni dei prodotti sono da ritenersi a titolo indicativo. Il tempo di durata dei prodotti è da ritenersi un dato indicativo e relativo ad un valore medio della fonte luminosa utilizzata. Questo dato non inficia la durata legale della garanzia. 7. La ditta venditrice si riserva il diritto di apportare senza preavviso modifiche dimensionali e/o qualitative per migliorare le caratteristiche dei propri prodotti e di eliminare in qualsiasi momento articoli presenti nel catalogo. 8. I prezzi possono subire variazioni a causa di leggi fiscali, aumenti considerevoli di materie prime ed errori di stampa. 9. Per ogni controversia è competente il foro di Trani. 10. Tutti i nostri prodotti sono conformi alle direttive CE.	1. The following terms and conditions of sale shall be deemed to be tacitly accepted by the purchaser, unless he expressly objects in writing at the time the order is placed. 2. Orders are always acquired subject to the approval of the seller. Agreed delivery times are not to be considered essential for the execution of the order and are therefore not binding. 3. Prices are indicated in euros, net of VAT. 4. The goods are supplied on a 'reserved domain' basis and the Company reserves the right to supply them also in partial deliveries. 5. After the expiry of 10 days from the date of delivery of the goods, the purchaser's right to lodge a complaint for defects and/or faults shall expire. The complaint shall be made in writing. 6. Product descriptions are to be considered as indicative only. The duration time of the products is to be considered as indicative and relative to an average value of the light source used. This figure does not affect the legal duration of the guarantee. 7. The seller reserves the right to make dimensional and/or qualitative changes to improve the characteristics of its products without prior notice and to remove items from the catalogue at any time. 8. Prices may vary due to tax laws, considerable increases in raw materials and printing errors. 9. Any disputes shall be settled by the Trani Court. 10. All our products comply with EC directives.
---	--

ONDATECH

è un brand di Ciciriello Group

ONDATECH si riserva il diritto di apportare modifiche nei materiali e nelle finiture dei prodotti presentati in questo catalogo in qualunque momento senza l'obbligo di preavviso.

Per tutte le tonalità di colore e finiture presenti in questo catalogo, devono essere tollerate variazioni minime di colorazione dovute alla riproduzione tipografica.

ONDATECH reserves the right to make changes in the materials and finishes of the products in this catalog at any time without notice. For all colour shades and finishes in this catalogue, minimal variations of colour due to typographical reproduction must be tolerated.



S.P. 231 km 49.700
76123 Andria (BT)
Italia

T
+39 0883 1927006

ondaluce@ciciriellogroup.com
export@ciciriellogroup.com

www.ondaluce-illuminazione.com
www.ciciriellogroup.com



Concept:
Ditre.com

Graphic artwork:
Daniela Marchini / Dadincanto

Art Direction:
Ufficio Progetti / Ciciriellogroup.com

Photo:
Quasarfoto.com

Image production:
Francesca Fani Studio / Ditre.com

Photo Editing
Ditre.com

printed in Italy:
Grafiche Gemma
Stampa Gennaio 2025



ondaluce-illuminazione.com
ciciriellogroup.com